

RT2669

Engine Powered Rough Terrain Scissor Lifts

AUSLIFT
EQUIPMENT

JLG

Performance

Platform Height – Elevated	8 m
Platform Height – Lowered	1.3 m
Platform Capacity (Single Extension)	680 kg
Platform Capacity (Deck Extension)	136 kg
No. Occupants (Indoor/Outdoor)	4/4
Lift/Lower Time	36/28 sec
Maximum Drive Height	Full Height
Weight	3,655 kg
Drive Speed – Elevated	0.8 km/h
Drive Speed – Lowered	5.6 km/h
Gradeability	40%
Turning Radius (Inside)	2 m
Turning Radius (Outside)	4 m

Standard Specifications

Tires

Tire Size	26 x 12 Foam Filled
-----------	---------------------

Engine


Dual Fuel Engine	Kubota WG972-GL-E4 23.2kw
Diesel Engine	Kubota D1305-E4B-J 18.5kw
Fuel Tank Capacity	38L
Drive	4WD Hydrostatic

Hydraulic System

Hydraulic Reservoir	50L
---------------------	-----

Dimensions

All dimensions are approximate.

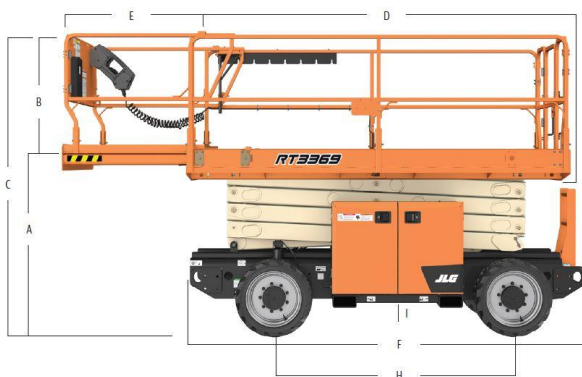

Platform Height – Elevated	7.98m
A. Platform Height – Lowered	1.3m
B. Platform Railing Height*	1.14m
C. Overall Height	2.46m
D. Platform Dimensions	3.3 x 1.6m
E. Platform Extension	1.07m
F. Overall Machine Length	3.53m
G. Overall Machine Width	1.76m
H. Wheelbase	2.07m
I. Ground Clearance	25.7m

*Fold Down Rails

Standard Features

- 42in Roll-out Deck Extension
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-Closing Gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent Pull Cable
- Oscillating Front Axle
- Scissor Management Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Lug Tread Tires
- 110V-AC Receptacle In Platform
- All Motion Alarm
- Horn
- Hourmeter
- Proportional Lift Drive
- Pin-based Load Sensing System
- Telematics-Ready Harness
- LCD Display with Lift Sense System
- Fold Down Rails
- ANSI A92.20 Compliant

Accessories & Options

- 15.2kg Aluminium Propane Tank
- Moveable, Removable Platform Control Box
- Hydraulic Levelling Jacks (Auto Level)
- Hydraulic Oil Cooler
- 26 x 12 Foam Filled Non-Marking Tires
- Flashing Amber Beacon – LED
- Dual Flashing Amber Beacons – LED
- White Noise Backup Alarm
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- 2500W Generator 60Hz/110V
- Dual LP Tanks (Dual Fuel Engines only)
- QuikLevel Advanced
- Heavy Duty Pipe Racks



The JLG "1 & 5" Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

AUSLIFT
EQUIPMENT

Auslift Equipment Pty. Ltd.
Factory 2/4 Souffi Place,
Dandenong South, Vic 3175
T: (03) 9702 7977
www.auslift.com.au