

RT3369

Engine Powered Rough Terrain Scissor Lift

AUSLIFT
EQUIPMENT



Performance

Platform Height – Elevated	9.96 m
Platform Height – Lowered	1.46 m
Platform Capacity	454 kg
Platform Capacity (Deck Extension)	136 kg
No. Occupants (Indoor/Outdoor)	4/2
Lift/Lower Time	42/33 sec
Maximum Drive Height	Full Height
Weight	4,017 kg
Drive Speed – Elevated	0.8 km/h
Drive Speed – Lowered	5.6 km/h
Gradeability	40%
Turning Radius (Inside)	2 m
Turning Radius (Outside)	4 m

Standard Specifications

Engine

Dual Fuel Engine	Kubota WG972-GL-E4 31hp (23.2kw)
Diesel Engine	Kubota D1305-E4B-J 24.8hp (18.5kw)
Fuel Tank Capacity	38L
Drive	4WD Hydrostatic

Tires


Tire Size	26 x 12 Foam Filled
-----------	---------------------

Hydraulic System

Hydraulic Reservoir	50L
---------------------	-----

Dimensions

All dimensions are approximate.

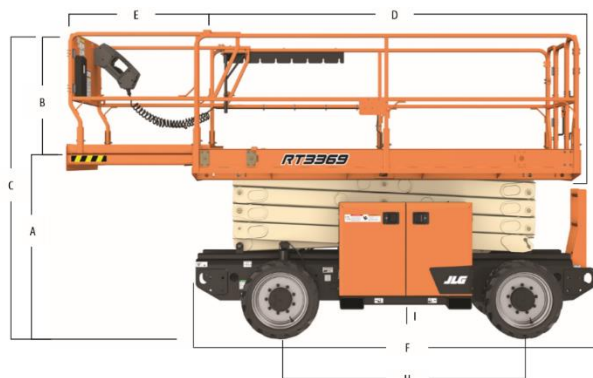

Standard Features

- 42in Roll-Out Deck Extension
- Nickel Plated Pins, Yellow Zinc-Chromate Plate Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display USB Charger and Phone Holder
- Self-closing gate
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Decent Pull Cable
- Oscillating Front Axle
- Scissor Maintenance Prop
- 110V-AC Receptacle in Platform
- All Motion Alarm
- Horn
- Hourmeter
- Proportional Lift and Drive
- Pin-based Load Sensing System
- Telematics-Ready Harness
- LCD Display with LiftSense System
- Fold Down Rails
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tires

Accessories & Options

- Hydraulic Levelling Jacks (Auto Level)
- 15.2kg Aluminium Propane Tank
- Movable, Removable Platform Control Box
- Hydraulic Oil Cooler
- 26 x 12 Foam Filled Non-Marking Tires
- 8 x 6V, 375 Amp-Hour Batteries
- Flashing Amber Beacon – LED
- Dual Flashing Amber Beacons – LED
- White Noise Backup Alarm
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Operator Access Control
- 2500W Generator 60Hz/110V
- Dual LP Tanks (Dual Fuel Engines Only)
- QuikLevel Advanced
- Heavy Duty Pipe Racks



Platform Height – Elevated	9.96m
A. Platform Height – Lowered	1.46m
B. Platform Railing Height	1.14m
C. Overall Height	2.61m
D. Platform Dimensions	3.3 x 1.6m
E. Platform Extension	1.07m
F. Overall Machine Length	3.53m
G. Overall Machine Width	1.76m
H. Wheelbase	2.07m
I. Ground Clearance	25.7cm

The JLG “1 & 5” Warranty

We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.

AUSLIFT
EQUIPMENT

Auslift Equipment Pty. Ltd.
Factory 2/4 Souffi Place,
Dandenong South, Vic 3175
T: (03) 9702 7977
www.auslift.com.au