


MODEL	GS™-1932
-------	----------


Measurements

Working height maximum*	7.79 m
A Platform height maximum	5.79 m
B Platform length – outside	1.63 m
extended	2.54 m
Slide-out platform extension deck	0.91 m
C Platform width – outside	0.74 m
Guardrail height	1.10 m
Toeboard height	0.15 m
D Height – stowed: fixed rails	2.00 m
folding guardrails	2.11 m
rails folded	1.75 m
E Length – stowed	1.83 m
Length – stowed extended	2.74 m
F Width	0.81 m
G Wheelbase	1.32 m
H Ground clearance – centre	0.06 m
I - with pothole guards deployed	0.02 m

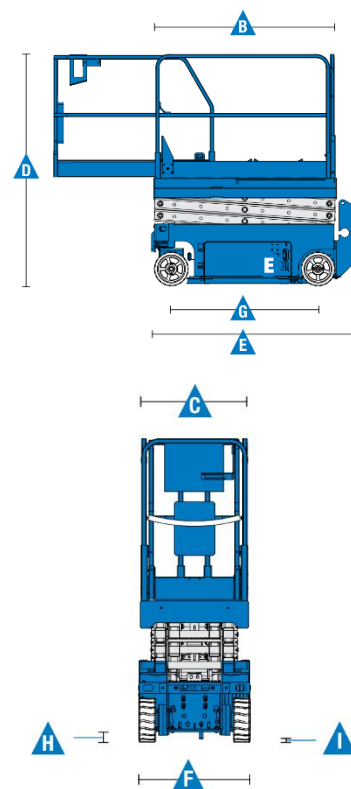

Productivity

Maximum platform capacity – indoor	2
Maximum platform capacity – outdoor	1
Lift capacity	227kg
Drive speed – stowed	4.0 km/h
Drive speed – raised	0.8 km/h
Gradeability**	30%
Turning radius – inside	Zero
– outside	1.55 m
Raise / lower speed	16 / 25 sec
Controls	proportional
Drive	dual front wheel
Multiple disc brakes	dual rear wheel
Tyres – solid non-marking	30 x 11 x 20 cm

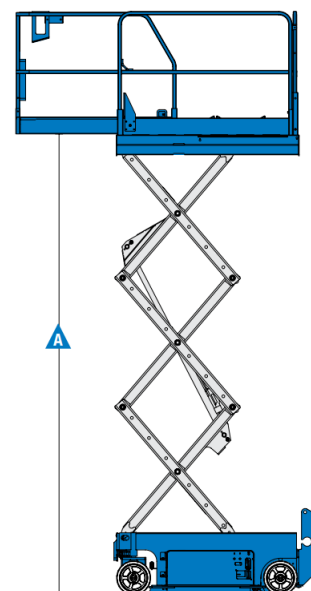

Power

Power source	24 V (four 6 V 225 Ah batteries)
Hydraulic system capacity	14.2 L

Weight***	1,500 kg
-----------	----------

Standards Compliance	CE EN280, PB-10-611-03, AS 1418.10
----------------------	------------------------------------

* The working height adds 2 m to platform height.

** Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

*** Weight will vary depending on options and/or country standards.

Standard Features

Measurements

- 7.79 m working height
- Up to 227 kg lift capacity

Productivity

- 1.63 m x 0.74 m steel platform
- Folding rails with half-height swing gate
- 0.91 m extension deck
- Dual front wheel drive
- Proportional lift and Drive
- 30% gradeability
- Platform control with battery charge indicator and diagnostic display
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Rear wheel multiple disc brakes
- Front wheel hydraulic dynamic braking
- Manual brake release
- Solid non-marking tyres
- Pothole guards
- Tilt alarm
- Descent alarm
- Electronic horn
- Hour meter
- Dual flashing beacons
- Motion alarm

Power

- 24 V DC (four 6 V 225 Ah batteries)
- Universal 20-amp smart charger

Options & Accessories

Productivity

- Platform swing gate, half height
- Airline to platform
- Platform work lights
- Automotive horn

Power Options

- Maintenance-free batteries
- 240 V power to platform

