

MODEL

GS™-3246

Measurements

Working height maximum – indoor¹ 11.78 m

outdoor¹ 8.71 m

A Platform height maximum – indoor 9.78 m
outdoor 6.71 m

B Platform height stowed 1.32 m

C Platform length – outside 2.26 m
extended 3.18 m

Slide-out platform extension deck 0.91 m

D Platform width – outside 1.16 m

Guardrail height 1.1 m

Toeboard height 0.15 m

E Height – stowed: folding guardrails 2.43 m
rails folded 1.82 m

F Length – stowed 2.44 m
Length – stowed extended 3.33 m

G Width 1.16 m

H Wheelbase 1.85 m

I Ground clearance – centre 0.12 m
- with pothole guards deployed 0.02 m

Productivity

Maximum platform capacity – indoor/ outdoor 2/1

Lift capacity 318 kg

Lift capacity – extension deck 113 kg

Drive speed – stowed 3.0 km/h

Drive speed – raised 0.8 km/h

Gradeability – stowed² 25%

Turning radius – inside Zero
– outside 2.29 m

Raise / lower speed 53 / 34 sec

Controls proportional

Drive dual AC electric drive, front wheel

Multiple disc brakes dual electric, front wheel

Tyres – solid non-marking 38 x 13 cm

Power

Power source 24 V (four 6 V 225 Ah batteries)

Hydraulic system capacity 14.2 L

Weight³ / Floor Loading⁴

Weight – ANSI/CSA/CE 2,367 kg




Tire load, maximum: 1,010 kg

Tire contact pressure: 1,021 KPa

Occupied floor pressure: 10.23 kPa

Standards Compliance

CE EN280, PB-10-611-03, AS 1418.10

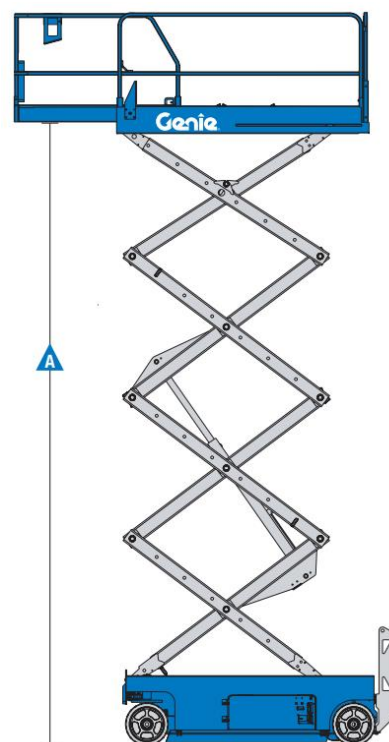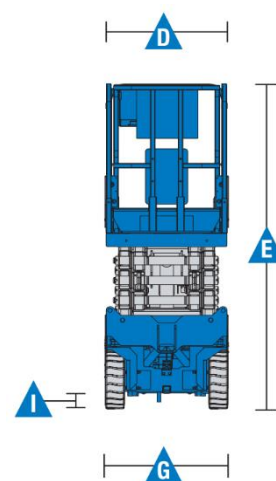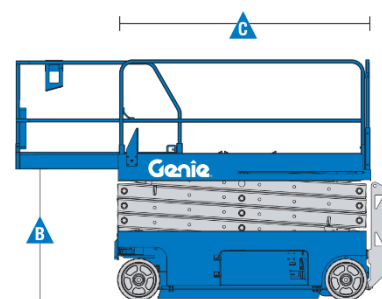

¹ The working height adds 2 m to platform height.

² Gradeability applies to driving on slopes, see Operator's Manual for details regarding slope ratings.

³ Weight will vary depending on options and/or country standards.

⁴ Note: Floor loading information is approximate and does not incorporate different option configurations. It should be used only with adequate safety factors.

Standard Features

Measurements

- 11.75 m working height
- Up to 318 kg lift capacity

Productivity

- 2.26 m x 1.15 m steel platform
- 0.91 m extension deck
- Folding rails with half-height swing gate
- Dual front wheel drive
- Universal 27A smart charger
- Rear recessed charger receptacle
- SmartLink™ - dual zone control
- Proportional lift and drive
- Platform load sense system
- Platform control guard
- Platform control with battery charge indicator and diagnostic display
- On-board diagnostic system
- AC power to platform
- Lanyard attachment points
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Dual front wheel electric brakes
- Electric & manual brake release
- Swing-out component trays
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm

Standard Features

Productivity (continued)

- Side & rear forklift pockets
- Maintenance free steel diamond plate platform
- Dual flashing LED beacons
- Descent alarm
- Electronic horn
- Hour meter
- Motion alarm
- Tech Pro™ Link compatible

Power

- 24 V DC (four 6 V 210 Ah batteries)

Options & Accessories

Productivity Options

- Ait line to platform
- Automotive horn*
- Biodegradable hydraulic fluid
- Lift Tools™ Pipe Cradle
- Lift Tools Panel Cradle
- Lift Tools Work Tray
- Lift Guard™ Contact Alarm
- Lift Connect™ Telematics

Power Options

- E-drive (AC electric drive system)
- Power Inverter (120 V/60Hz)¹
- EE rating
- AGM maintenance-free batteries
- Drive cutout while charging



¹ Not available with EE rating