
## **SERIES 1900**Material Lift





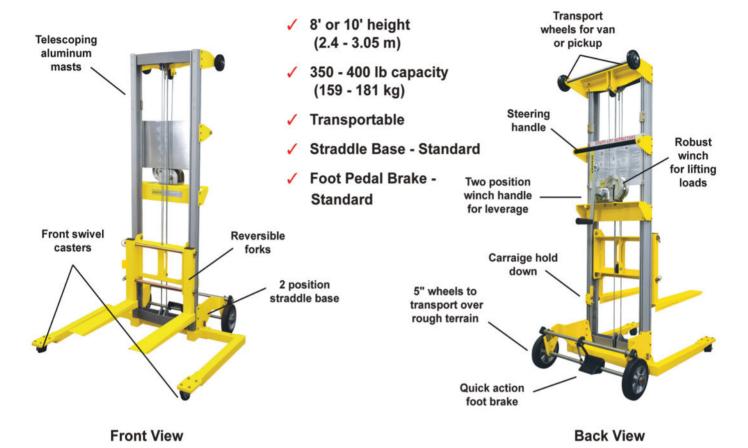

Specifications	1908	1910	
Height Stowed	5' 8 <sup>1</sup> / <sub>4</sub> " / 1.73 m	6' 7.5" / 2.02 m	
Forks Up	10' / 3.0 m	11' 8 <sup>5</sup> / <sub>6</sub> " / 3.6 m	
Forks Down	8' 2"/ 2.49 m	9' 9.5" / 2.98 m	
Width Max	3' 6 <sup>3</sup> / <sub>4</sub> " / 1.08 m	3' 6 <sup>3</sup> / <sub>4</sub> " / 1.08 m	
Width Min	2' 4 <sup>1</sup> / <sub>2</sub> " / .72 m	2' 4 <sup>1</sup> / <sub>2</sub> " / .72 m	
Inside Max	3' <sup>3</sup> / <sub>4</sub> " / .93 m	3' <sup>3</sup> / <sub>4</sub> " / .93 m	
Length Stowed	1' 4.5" / .42 m	1' 4.5" / .42 m	
Length Operating	3' 10" / 1.16 m	3' 10" / 1.16 m	
Weight	168 lb / 76 kg	172 lb / 78 kg	
Load Capacity	400 lb / 180 kg	350 lb / 160 kg	

Part #	Description	lb	kg
782050	Series 1908, 8' H, 350 lb	168	76
782051	Series 1910, 10' H, 400 lb	172	78

## **DISTRIBUTED BY AUSLIFT EQUIPMENT**

P: 03 9702 7977 E: sales@auslift.com.au W: www.auslift.com.au