

# ALTRACK

## LED Track Light

Norms: EN 60598-1, EN 60598-2-1, EN 62471, EN 62493



### Product information



Product number:	ALT35 - L06
Track System:	2 wire, 4 wire
Input Voltage (v):	48VDC
Dimming:	On/Off, 1-10V, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	60
IP Rating:	20
Working Temperature (°C)	-5 - +30
Storage Temperature (°C)	-20 - +50
Material:	Aluminium
Fitting Colors:	9016 Matte White / 9017 Matte Black




### Packaging information

N.W. lamp (Kg):	0.2
G.W. Carton (Kg):	16
Master carton dimensions(mm):	420x370x220
Quantity per carton:	40

Beam	Watt	CRI	Luminous	CCT	Code
16	06W	90	549.1 lm	4000K	JALT352-L06G40-S
			518.1 lm	3000K	JALT352-L06G30-S
			481.8 lm	2700K	JALT352-L06G27-S
24	06W	90	521.4 lm	4000K	JALT352-L06G40-M
			491.9 lm	3000K	JALT352-L06G30-M
			457.5 lm	2700K	JALT352-L06G27-M
34	06W	90	524.0 lm	4000K	JALT352-L06G40-F
			494.4 lm	3000K	JALT352-L06G30-F
			459.8 lm	2700K	JALT352-L06G27-F



Honeycomb Oval diffuser Diffuser  
L01 L02 L03

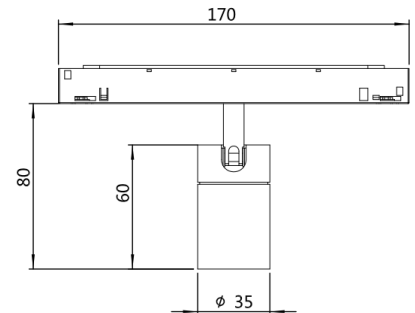

Code composition: 1 ALT 2 85 3 6 - 4 D 5 40 6 G27 - 7 B 8 S - 9 L01

① Product Code	② Diameter size	③ Track style	④ Dimming type	⑤ Watt	⑥ LED K & CRI	⑦ Finishes	⑧ Optical angle	⑨ Accessories
JALT	φ 85mm	6 Wire	X Not-Driver	40W	H27 2700 95	White	S Spot M	L01 Honeycomb
	φ 70mm	4 Wire	T TRIAC	37W	G27 2700 90	Black	Medium F	L02 Oval diffuser
	φ 55mm	3 Wire	V 1-10V	35W	G30 3000 90		Flood	L03 Diffuser
	φ 45mm	2 Wire	D DALI	32W	G40 4000 90		WF Wide Flood	L04 Anti-glare ring O
	φ 35mm		L DC48V		E50 5000 80		Oval	