

# EDGE II

## Recessed Downlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2

### Product information



Product number:	REG2055A - 8W
Input Voltage (v):	220-240V
Dimming:	On/Off, TRIAC, 1-10V, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	30
IP Rating:	20
Working Temperature (°C)	-5 ~ +30
Storage Temperature (°C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black




Round Trim

Round Trimless

### Packaging information

N.W. lamp (Kg)	0.24
G.W. Carton (Kg)	18
Master carton dimensions(mm)	655x620x225
Quantity per carton(PCS)	60

Beam	Watt	CRI	Luminous	CCT	Code
20	8W	90	558.8	4000K	REG2055FS-08G40
			494.6	3000K	REG2055FS-08G30
			460.0	2700K	REG2055FS-08G27
30	8W	90	626.1	4000K	REG2055FM-08G40
			541.2	3000K	REG2055FM-08G30
			503.3	2700K	REG2055FM-08G27
40	8W	90	644.6	4000K	REG2055FF-08G40
			571.8	3000K	REG2055FF-08G30
			531.8	2700K	REG2055FF-08G27

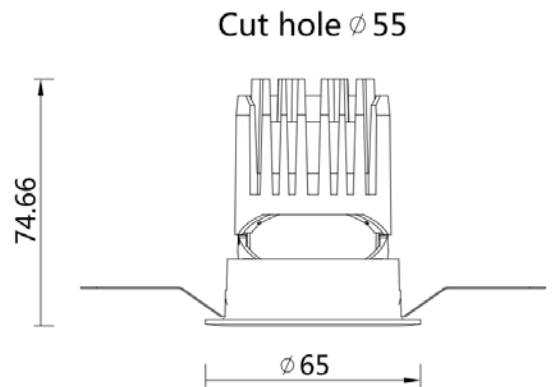

Code composition: REG2 055 A R1 W - R S 01 - D 08 G27

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

Product Code	Hole Cut Size	Structural	Structural style	Finishes	Optical	Angle	Anti-glare cover	Dimming	Watt	LED	Kelvin & CRI
REG2	Φ55mm	Fixed	R1	Round Trim	White	Reflector	S Spot	01 Mirror silver	X Not-Driver	8W	H27 2700 95
			Adjustable	R2	Round Trimless	Black	Lens	M Medium	02 Flax Silver	T TRIAC	G27 2700 90
	Wall Washer	S1	Square Trim	S2	Square Trimless		F Flood	03 Matte white	V 1-10V	G30 3000 90	
								04 Blinding black	D DALI	G40 4000 90	
								05 Bright black	E50 5000 80		
								06 Matte black			
								07 Charm Gold			