


Office Lighting Series
JBM99 LED



عبدالز


JBM99 flat -Surface & recessed

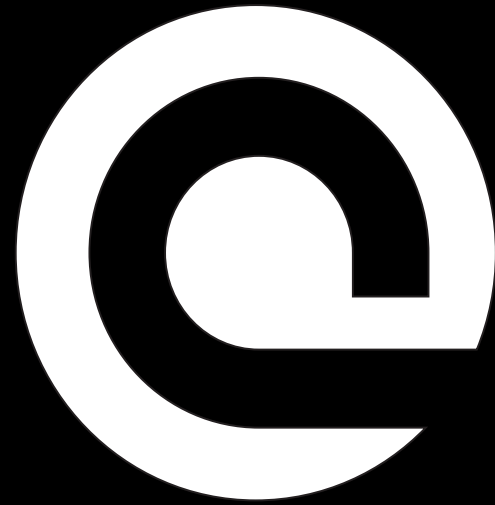

JBM99 Curved -Surface & recessed



JBM99 Flat & Curved -Wall Installation

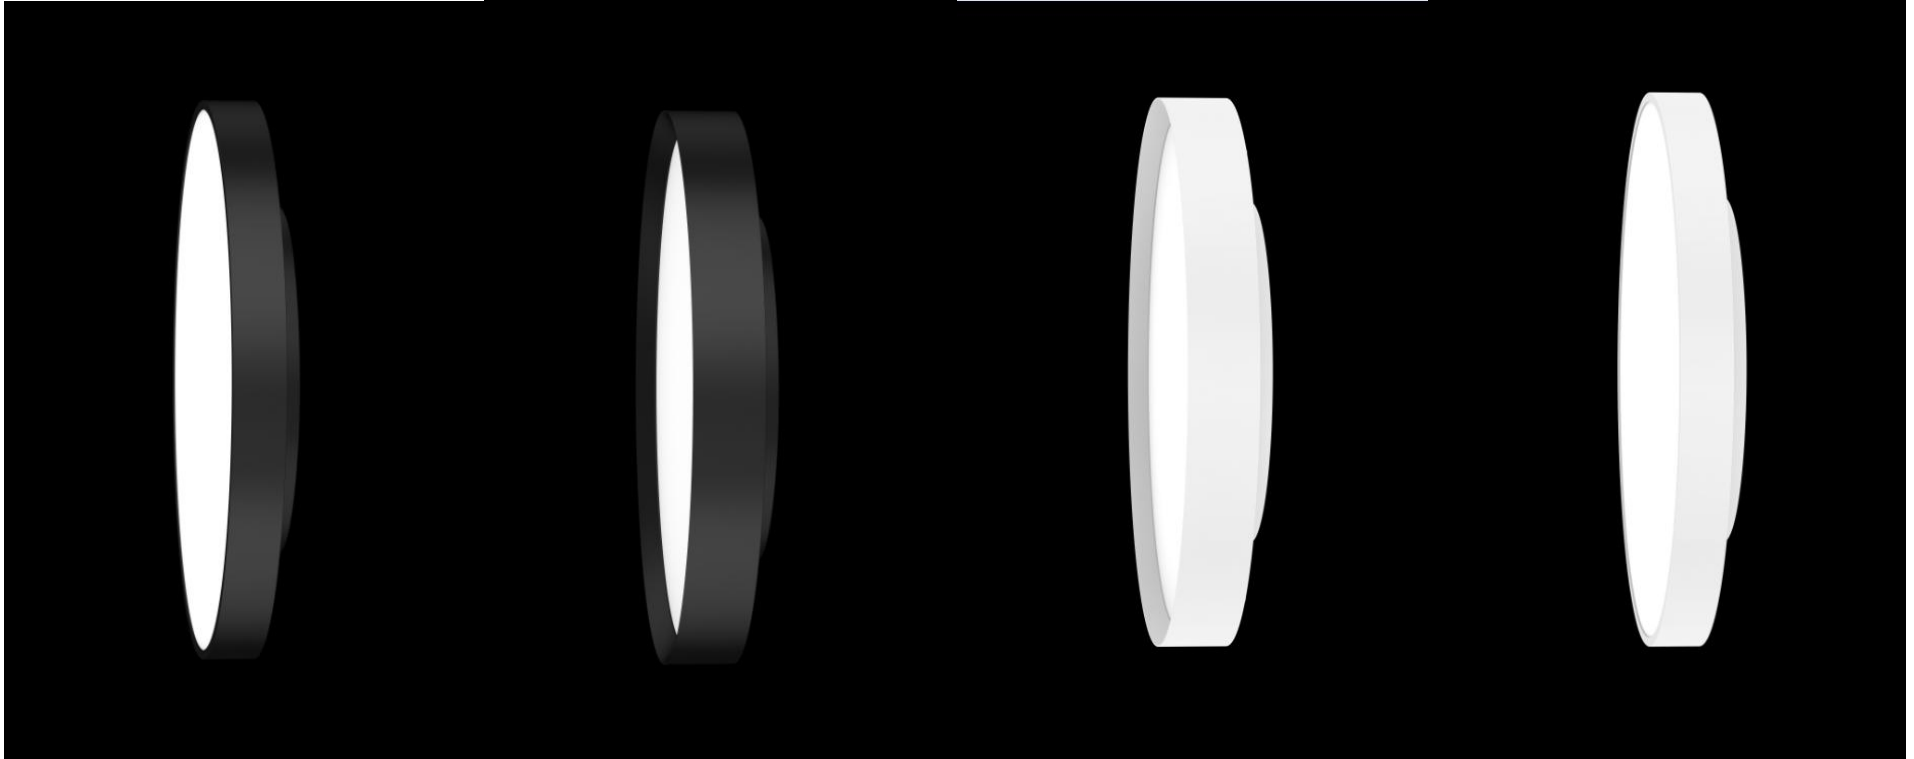

JBM99 flat & curved -Pendant 1



JBM99 flat -Pendant 2




JBM99 flat & curved -Pendant 3



Surface flat direct & indirect

Surface curved direct & indirect

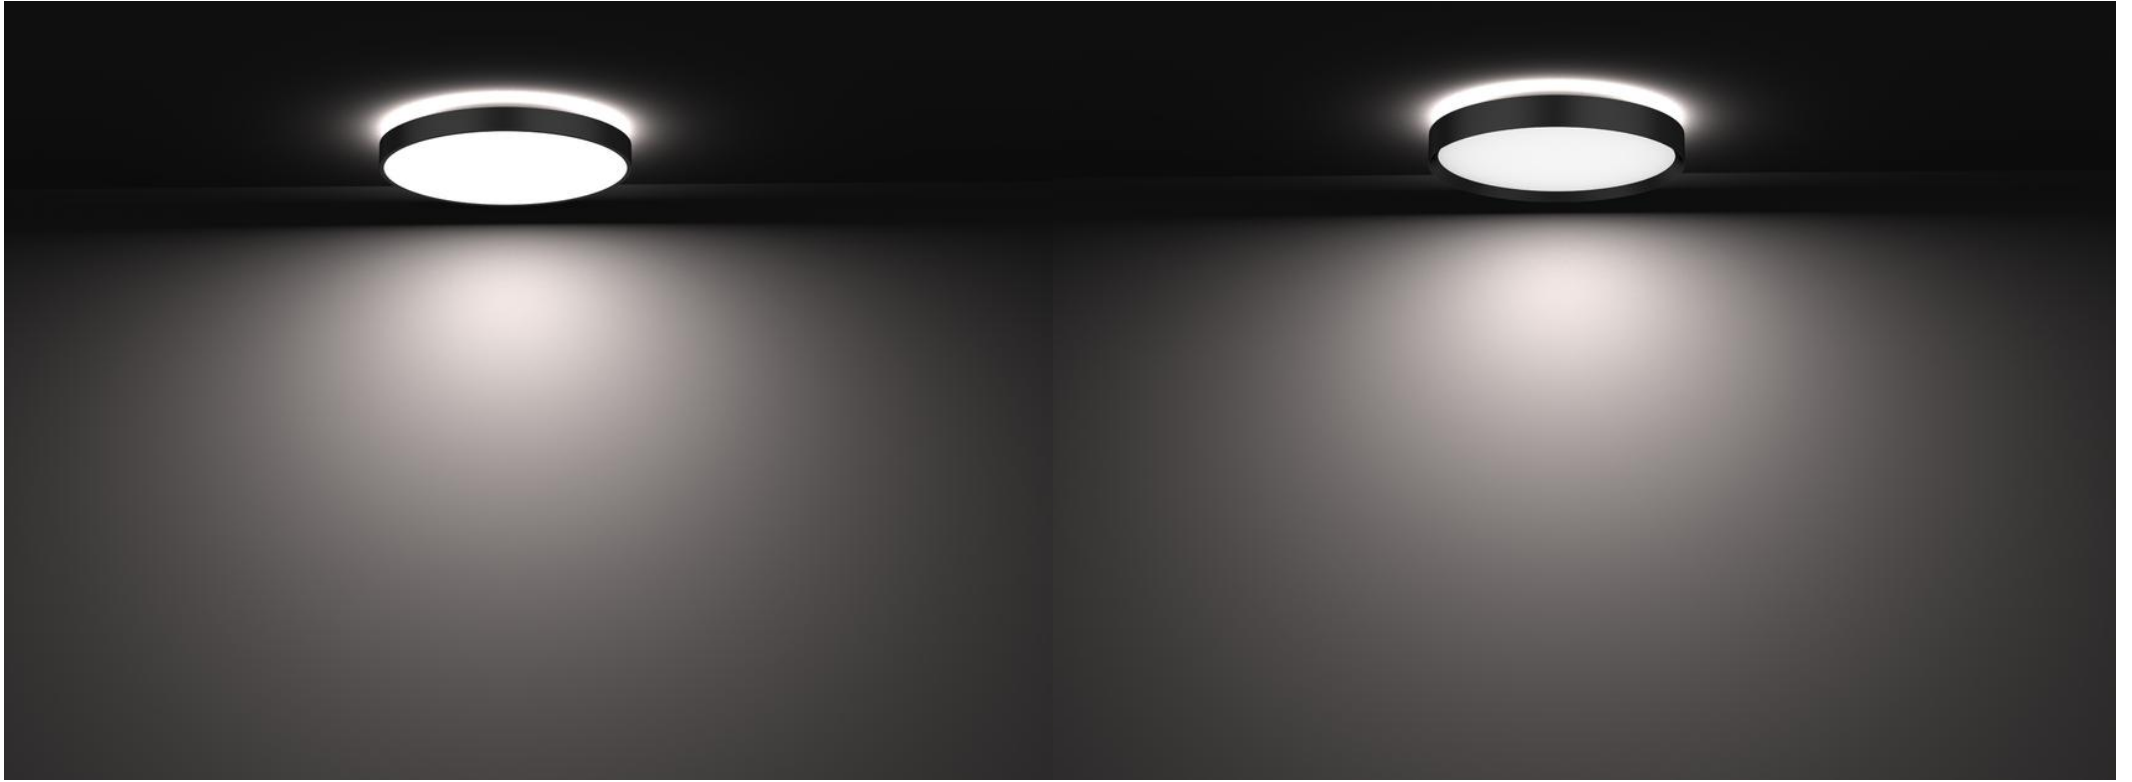

JBM99 direct & indirect -Wall Installation




Pendant 1 flat direct & indirect

Pendant 1 curved direct & indirect



Pendant 2 flat direct & indirect

Pendant 2 curved direct & indirect

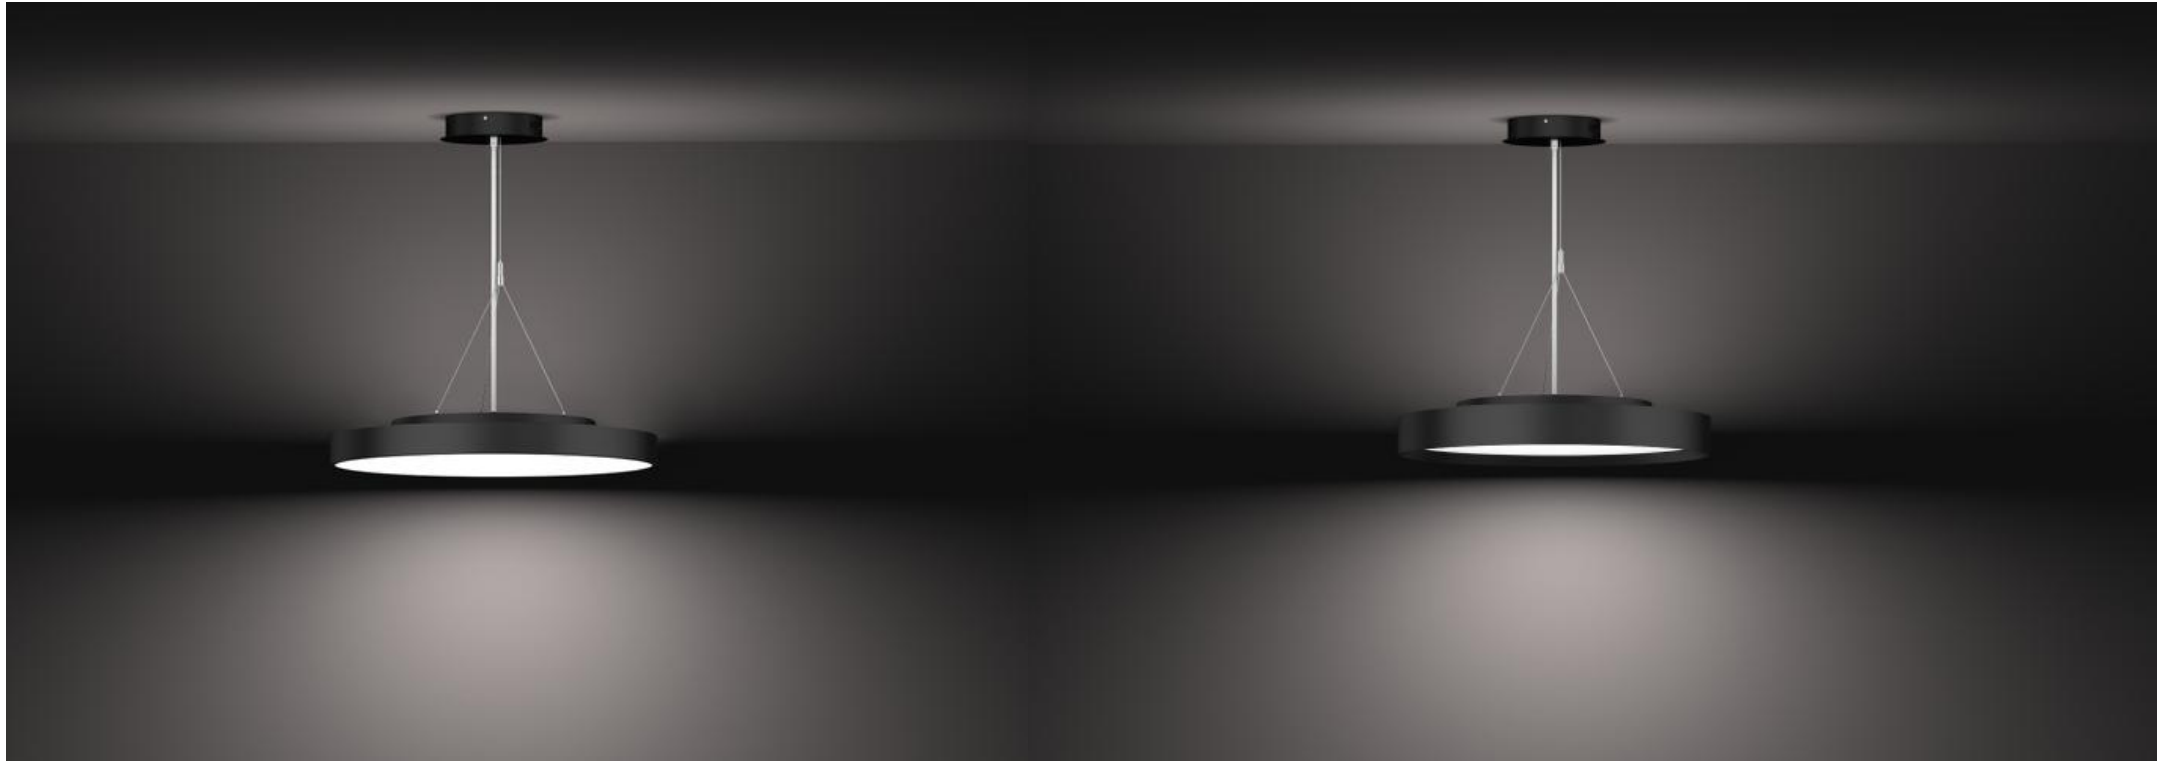


Pendant 3 flat direct & indirect




Pendant 3 curved direct & indirect



Opal & micro-prismatic diffuser

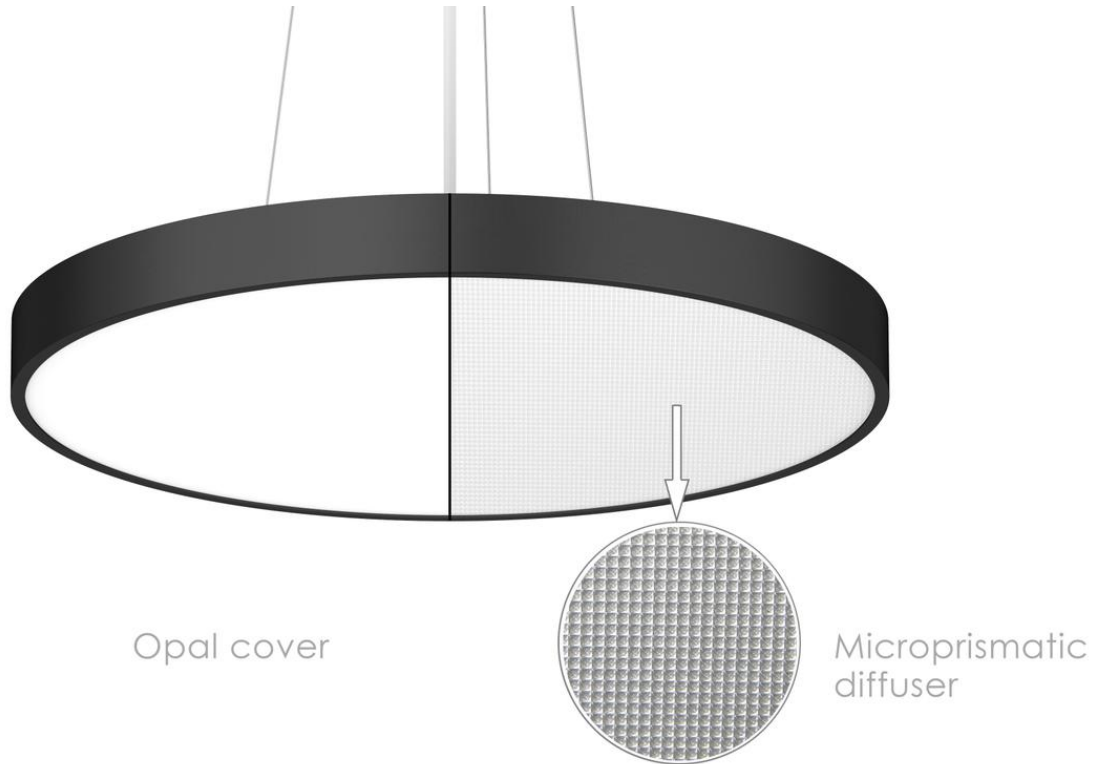

5 DIY installations

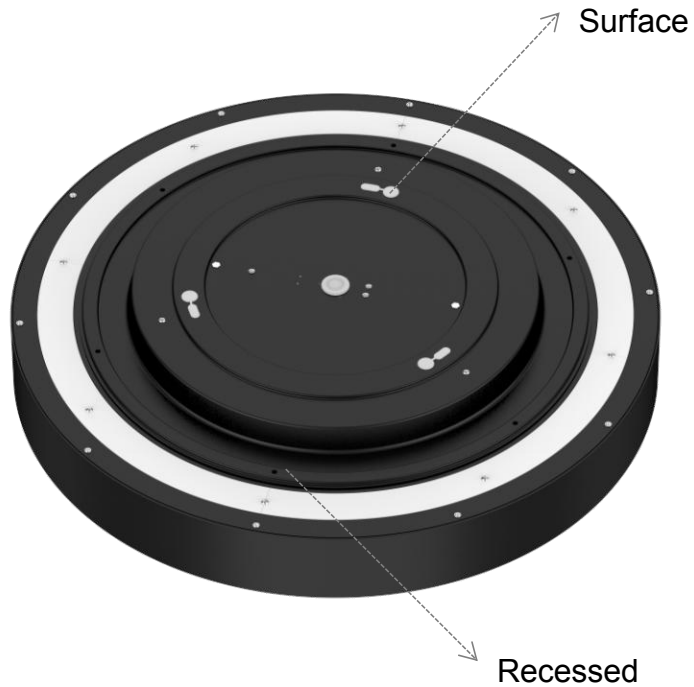

Pendant accessory 1



- with 3pcs steel rope + AC cable
- cable length adjustable
- cable length customized

Pendant accessory 2



- 3pcs steel rope bundled
- cable length adjustable
- cable length customized

Pendant accessory 3



- Pendant rod
- 500mm
- customized length with MOQ

Features:

- High quality ceiling & wall & pendant light for both residential & decorative application
- Size : $\Phi 400 \times 86\text{mm}$; $\Phi 600 \times 86\text{mm}$; $\Phi 800 \times 86\text{mm}$; $\Phi 1000 \times 86\text{mm}$
- Wattage : $\Phi 400\text{mm}$ 30W & 40W; $\Phi 600\text{mm}$ 40W & 60W; $\Phi 800\text{mm}$ 60W & 80W; $\Phi 1000\text{mm}$ 80W & 100W
- 2 covers options: flat & curved, flat available already, curved follow in 1 month
- 2 diffuser options: opal & micro-prismatic

- LED: CRI80 CRI90 ; 100-110lm/w (CRI80)
- With built-in Osram branded driver (on/off + DALI)
- Finish : White RAL 9019 , Black RAL9005
- Material of diffuser : PS (opal + micro-prismatic)
- Material of frame and housing : Iron
- Ingress Protection (IP Rating): IP40 anti-mosquito
- Function: CCT dipswitch ; wattage dipswitch for on/off ; on/off, DALI, more intelligent functions in process

- Light direction: 100% down; 10% UP & 90% down; 2:8, 3:7 for customized
- Installation: ceiling & recessed; wall installation ; suspended cable and suspended rod.

Application: ideal for office areas, hotel, lobby, reception, public area , room ,hallway etc..

Model_No.	JBM99 400mm	JBM99 600mm	JBM99 800mm	JBM99 1000mm
Dimension (mm)	Φ400*86mm	Φ600*86mm	Φ800*86mm	Φ1000*86mm
Luminous Flux	4000K: 100-110lm/w	4000K: 100-110lm/w	4000K: 100-110lm/w	4000K: 100-110lm/w
Wattage	30W 40W wattage change	40W 60W wattage change	60W 80W wattage change	80W 100W wattage change
Power factor	>0.9	>0.9	>0.9	>0.9
Beam Angle	120°	120°	120°	120°
SDCM	<6	<6	<6	<6
CCT	2700K/3000K/4000K/5700K	2700K/3000K/4000K/5700K	2700K/3000K/4000K/5700K	2700K/3000K/4000K/5700K
CRI	Ra>80 & 90 optional	Ra>80 & 90 optional	Ra>80 & 90 optional	Ra>80 & 90 optional
Voltage input	AC200-240V	AC200-240V	AC200-240V	AC200-240V
LED	qualified SMD	qualified SMD	qualified SMD	qualified SMD
LED driver	Osram on off/ DALI built in	Osram on off/ DALI built in	Osram on off/ DALI built in	Osram on off/ DALI built in
Life time(hours)	50,000hrs (L70 B50 @25°C)	50,000hrs (L70 B50 @25°C)	50,000hrs (L70 B50 @25°C)	50,000hrs (L70 B50 @25°C)
Dimming	on/off, triac dim, DALI	on/off, DALI	on/off, DALI	on/off, DALI
Protection class	Class I	Class I	Class I	Class I
Materials	Iron	Iron	Iron	Iron
IP rating	IP40	IP40	IP40	IP40
Color	White RAL9016 & Black RAL9005			
installations	wall + ceiling & recessed + suspended cable and suspended rod			
Operating temp.	-20°C - 45°C	-20°C - 45°C	-20°C - 45°C	-20°C - 45°C
Glow wire	650°C	650°C	650°C	650°C



© 2019 Jibe Lighting - all rights reserved

Jibe reserves the right to alter material, dimensions and characteristics without prior notice.

Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the brochure.

Our general terms and conditions shall apply notwithstanding any stipulation to the contrary to all the orders and agreements with Jibe.

You can obtain a copy of these conditions on demand.

For latest information and specifications of the full product range visit www.jibe.lighting

JIBE LIGHTING — HEADQUARTERS
Hogebrinkerweg 14V - 3871 KN Hoevelaken
Netherlands Tel: +31 (0)33 844 7111
info@jibe.lighting - www.jibe.lighting