

EDGE II

Recessed Downlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2

Product information



| | |
|--------------------------|-------------------------------------|
| Product number: | REG2075A - 11W |
| Input Voltage (v): | 220-240V |
| Dimming: | On/Off, TRIAC, 1-10V, DALI |
| Light source: | COB LED |
| luminaire Lifetime: | 50.000h (L80-B10, Ta25°C) |
| Rotation Angle (degree): | 350 |
| Tilting Angle (degree): | 30 |
| IP Rating: | 20 |
| Working Temperature (°C) | -5 ~ +30 |
| Storage Temperature (°C) | -20 ~ +50 |
| Material: | Aluminium |
| Fitting Colors: | 9016 Sandy White / 9017 Sandy Black |




Round Trim

Round Trimless

Packaging information

| | |
|------------------------------|-------------|
| N.W. lamp (Kg) | 0.37 |
| G.W. Carton (Kg) | 18 |
| Master carton dimensions(mm) | 678x670x277 |
| Quantity per carton(PCS) | 40 |

| Beam | Watt | CRI | Luminous | CCT | Code |
|------|------|-----|----------|-------|-----------------|
| | 11W | 90 | 819.2 | 4000K | REG2075AS-11G40 |
| | | | 726.7 | 3000K | REG2075AS-11G30 |
| | | | 675.8 | 2700K | REG2075AS-11G27 |
| | 11W | 90 | 824.2 | 4000K | REG2075AM-11G40 |
| | | | 730.6 | 3000K | REG2075AM-11G30 |
| | | | 679.5 | 2700K | REG2075AM-11G27 |
| | 11W | 90 | 871.8 | 4000K | REG2075AF-11G40 |
| | | | 772.7 | 3000K | REG2075AF-11G30 |
| | | | 718.6 | 2700K | REG2075AF-11G27 |

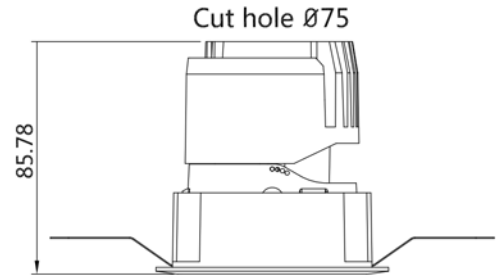

Code composition: REG2 075 A R1 W - R S 01 - D 20 G27

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

| Product Code | Hole Cut Size | Structural | Structural style | Finishes | Optical | Angle | Anti-glare cover | Dimming | Watt | LED | Kelvin & CRI | |
|--------------|---------------|-------------|-------------------|--------------------|-----------|----------|------------------|-------------------|---------|---------|--------------|---------|
| REG2 | Φ95mm | Fixed | R1 Round Trim | White | Reflector | S Spot | 01 Mirror silver | X Not-Driver | 20W | H27 | 2700 95 | |
| | Φ75mm | Adjustable | R2 Round Trimless | Black | Lens | M Medium | 02 Flax Silver | T TRIAC | | G27 | 2700 90 | |
| | Φ55mm | Wall Washer | S1 | Square Trim | | | F Flood | 03 Matte white | V 1-10V | | G30 | 3000 90 |
| | | | | S2 Square Trimless | | | | 04 Blinding black | D DALI | | G40 | 4000 90 |
| | | | | | | | 05 Bright black | | E50 | 5000 80 | | |
| | | | | | | | 06 Matte black | | | | | |
| | | | | | | | 07 Charm Gold | | | | | |