

EDGE II

Recessed Downlight

Norms: EN 60598-1, EN 60598-2-1, EN60598-2-2

Product information



Product number:	REG2095F - 20W
Input Voltage (v):	220-240V
Dimming:	On/Off, TRIAC, 1-10V, DALI
Light source:	COB LED
luminaire Lifetime:	50.000h (L80-B10, Ta25°C)
Rotation Angle (degree):	350
Tilting Angle (degree):	N/A
IP Rating:	20
Working Temperature (°C)	-5 ~ +30
Storage Temperature (°C)	-20 ~ +50
Material:	Aluminium
Fitting Colors:	9016 Sandy White / 9017 Sandy Black




Round Trim

Round Trimless

Packaging information

N.W. lamp (Kg)	0.6
G.W. Carton (Kg)	26
Master carton dimensions(mm)	678x670x277
Quantity per carton(PCS)	40

Beam	Watt	CRI	Luminous	CCT	Code
20	20W	90	1307.1	4000K	REG2095FS-20G40
			1212.8	3000K	REG2095FS-20G30
			1127.9	2700K	REG2095S-20G27
25	20W	90	1648.6	4000K	REG2095FM-20G40
			1282.6	3000K	REG2095FM-20G30
			1192.8	2700K	REG2095FM-20G27
38	20W	90	1334.3	4000K	REG2095FF-20G40
			1325.9	3000K	REG2095FF-20G30
			1233.1	2700K	REG2095FF-20G27

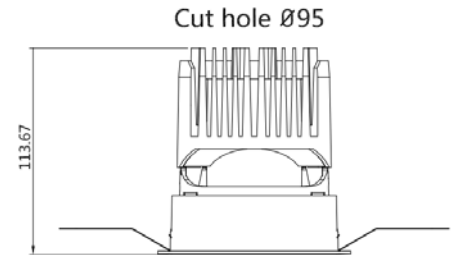

Code composition: REG2 095 F R1 W - R S 01 - D 20 G27

- ①
- ②
- ③
- ④
- ⑤
- ⑥
- ⑦
- ⑧
- ⑨
- ⑩
- ⑪

Product Code	Hole Cut Size	Structural	Structural style	Finishes	Optical	Angle	Anti-glare cover	Dimming	Watt	LED	Kelvin & CRI	
REG2	Φ95mm	Fixed	R1 Round Trim	White	Reflector	S Spot	01 Mirror silver	X Not-Driver	20W	H27	2700 95	
	Φ75mm	Adjustable	R2 Round Trimless	Black	Lens	M Medium	02 Flax Silver	T TRIAC		G27	2700 90	
	Φ55mm	Wall Washer	S1	Square Trim			F Flood	03 Matte white	V 1-10V		G30	3000 90
				S2 Square Trimless				04 Blinding black	D DALI		G40	4000 90
							05 Bright black		E50	5000 80		
							06 Matte black					
							07 Charm Gold					