


**FLOW**

**JTL58-28W**

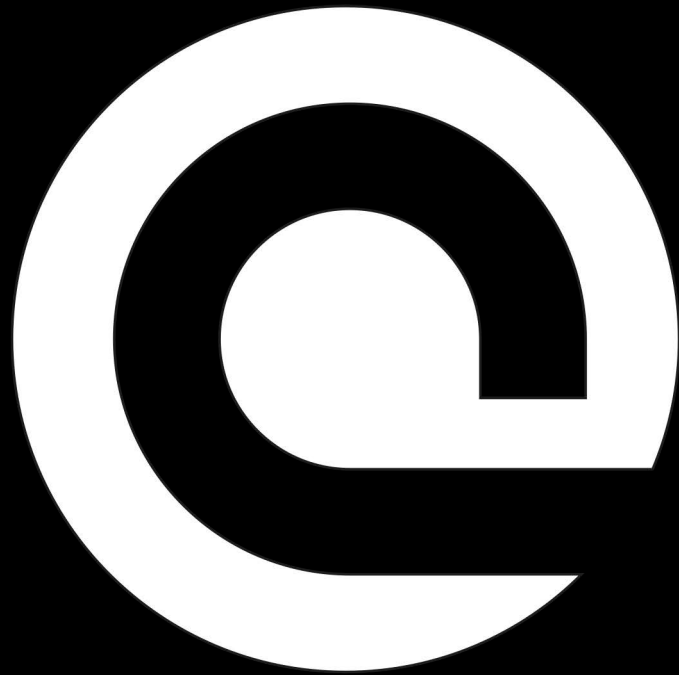

**مباہز**




**2019**

# JTL58-28W

optical lens

## Technical Parameters:

Name	Parameters
Light source:	COB
Input Voltage:	AC220~240V 50/60Hz
LED Current:	700mA, 35-37V
Operating temperature:	-20°C~40°C
Certificate:	CE/RoHS
Warranty:	3 years

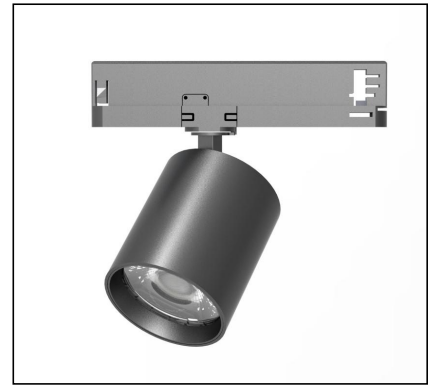


○ White ● Black

## Ordering Information:


Power	CRI	Beam Angle	Luminous	CCT	Housing	Part Number		
28W	>80	▲ 20°	3125 lm	3000K	○	JTL584-28W-830-W-15-A		
					●	JTL584-28W-830-B-15-A		
					3315 lm	4000K	○	JTL584-28W-840-W-15-A
						●	JTL584-28W-840-B-15-A	
		▲ 26°	3238 lm	3000K	○	JTL584-28W-830-W-24-A		
					●	JTL584-28W-830-B-24-A		
				3438 lm	4000K	○	JTL584-28W-840-W-24-A	
					●	JTL584-28W-840-B-24-A		
		▲ 36°	3237 lm	3000K	○	JTL584-28W-830-W-36-A		
					●	JTL584-28W-830-B-36-A		
				3451 lm	4000K	○	JTL584-28W-840-W-36-A	
					●	JTL584-28W-840-B-36-A		
	▲ 60°	3144 lm	3000K	○	JTL584-28W-830-W-60-A			
				●	JTL584-28W-830-B-60-A			
			3357 lm	4000K	○	JTL584-28W-840-W-60-A		
				●	JTL584-28W-840-B-60-A			
	>90	▲ 20°	2753 lm	3000K	○	JTL584-28W-930-W-20-A		
					●	JTL584-28W-930-B-20-A		
				2862lm	4000K	○	JTL584-28W-940-W-20-A	
					●	JTL584-28W-940-B-20-A		
		▲ 26°	2855 lm	3000K	○	JTL584-28W-930-W-26-A		
					●	JTL584-28W-930-B-26-A		
				2963 lm	4000K	○	JTL584-28W-940-W-26-A	
					●	JTL584-28W-940-B-26-A		
36°		2839 lm	3000K	○	JTL584-28W-930-W-36-A			
				●	JTL584-28W-930-B-36-A			
			2975lm	4000K	○	JTL584-28W-940-W-36-A		
				●	JTL584-28W-940-B-36-A			
60°	2771lm	3000K	○	JTL584-28W-930-W-60-A				
			●	JTL584-28W-930-B-60-A				
		2891lm	4000K	○	JTL584-28W-940-W-60-A			
			●	JTL584-28W-940-B-60-A				

Technical Data test pattern:


CRI80 15°

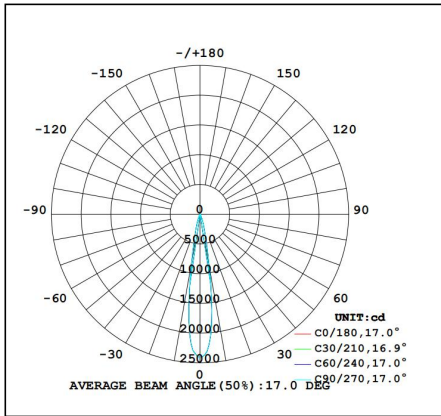


3000K

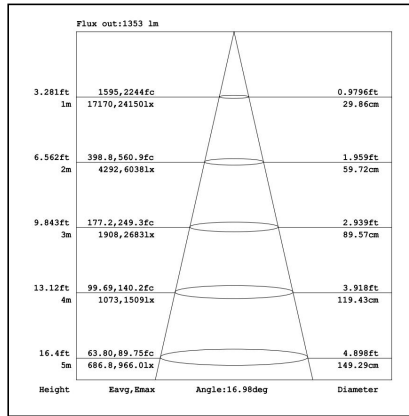


CRI80 24°

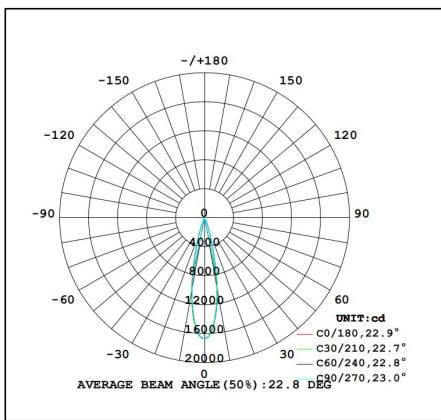


3000K

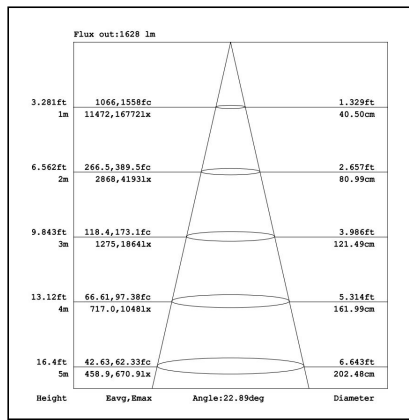





CRI80 36°

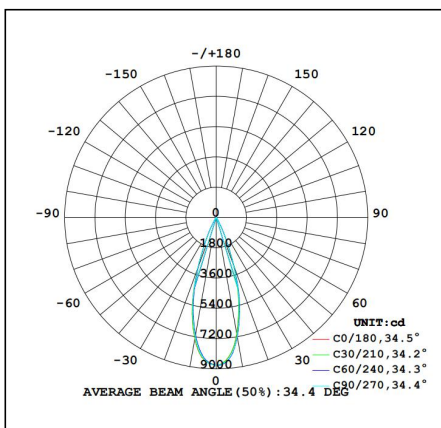


3000K

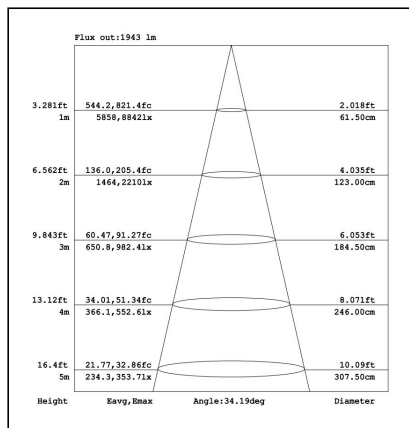


Installation instruction:

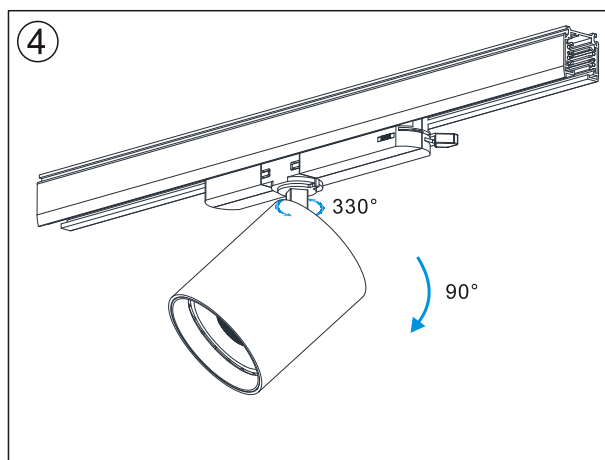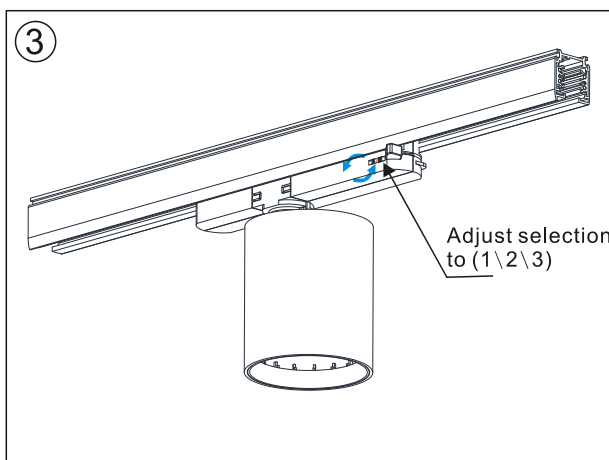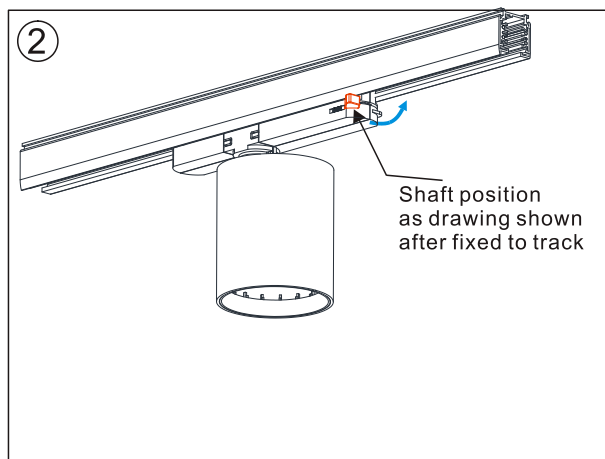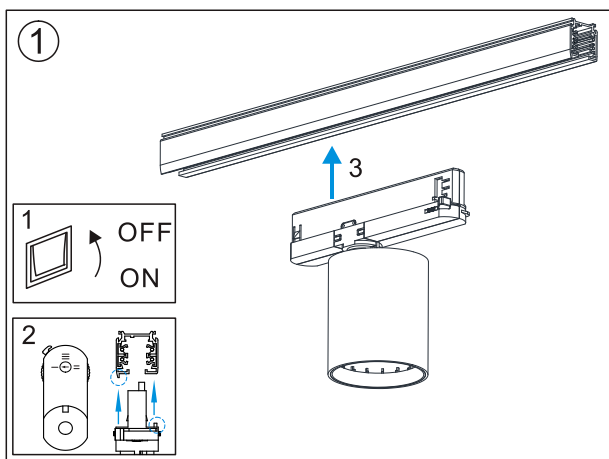

Packaging:



**Box**  
L210\*W175\*H90mm  
1pc/box  
GW: 0.7kg/box



**Outer carton**  
L430\*W365\*H390mm  
16pcs/CTN  
GW: 12kg/carton

**JIBE LIGHTING — HEADQUARTERS**  
Hogebrinkerweg 14V - 3871 KN Hoevelaken  
Netherlands Tel: +31 (0)33 844 7111  
info@jibe.lighting - www.jibe.lighting



**LED THERE BE LIGHT**

**JIBE LIGHTING — GERMANY**  
Marie-Curie-Ring 38- 63477 Maintal  
Germany Tel: +49 (0)6181 90 90 509  
Mob : +49 (0)162 26 36 614  
fax : +49 (0)6181 61 01 618  
s.fischer@jibe-lighting.de

**JIBE LIGHTING — NORHT AMERICA**  
5917 NW 63 Way - Parkland FL 33067  
USA Tel: 954-899-4040  
todd.darling@jibeusa.lighting

© 2019 Jibe Lighting - all rights reserved

Jibe reserves the right to alter material, dimensions and characteristics without prior notice. Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the brochure.

Our general terms and conditions shall apply notwithstanding any stipulation to the contrary to all the orders and agreements with Jibe.

You can obtain a copy of these conditions on demand.

For latest information and specifications of the full product range visit [www.jibe.lighting](http://www.jibe.lighting)