


# EDGE II

Glare-less Down Light




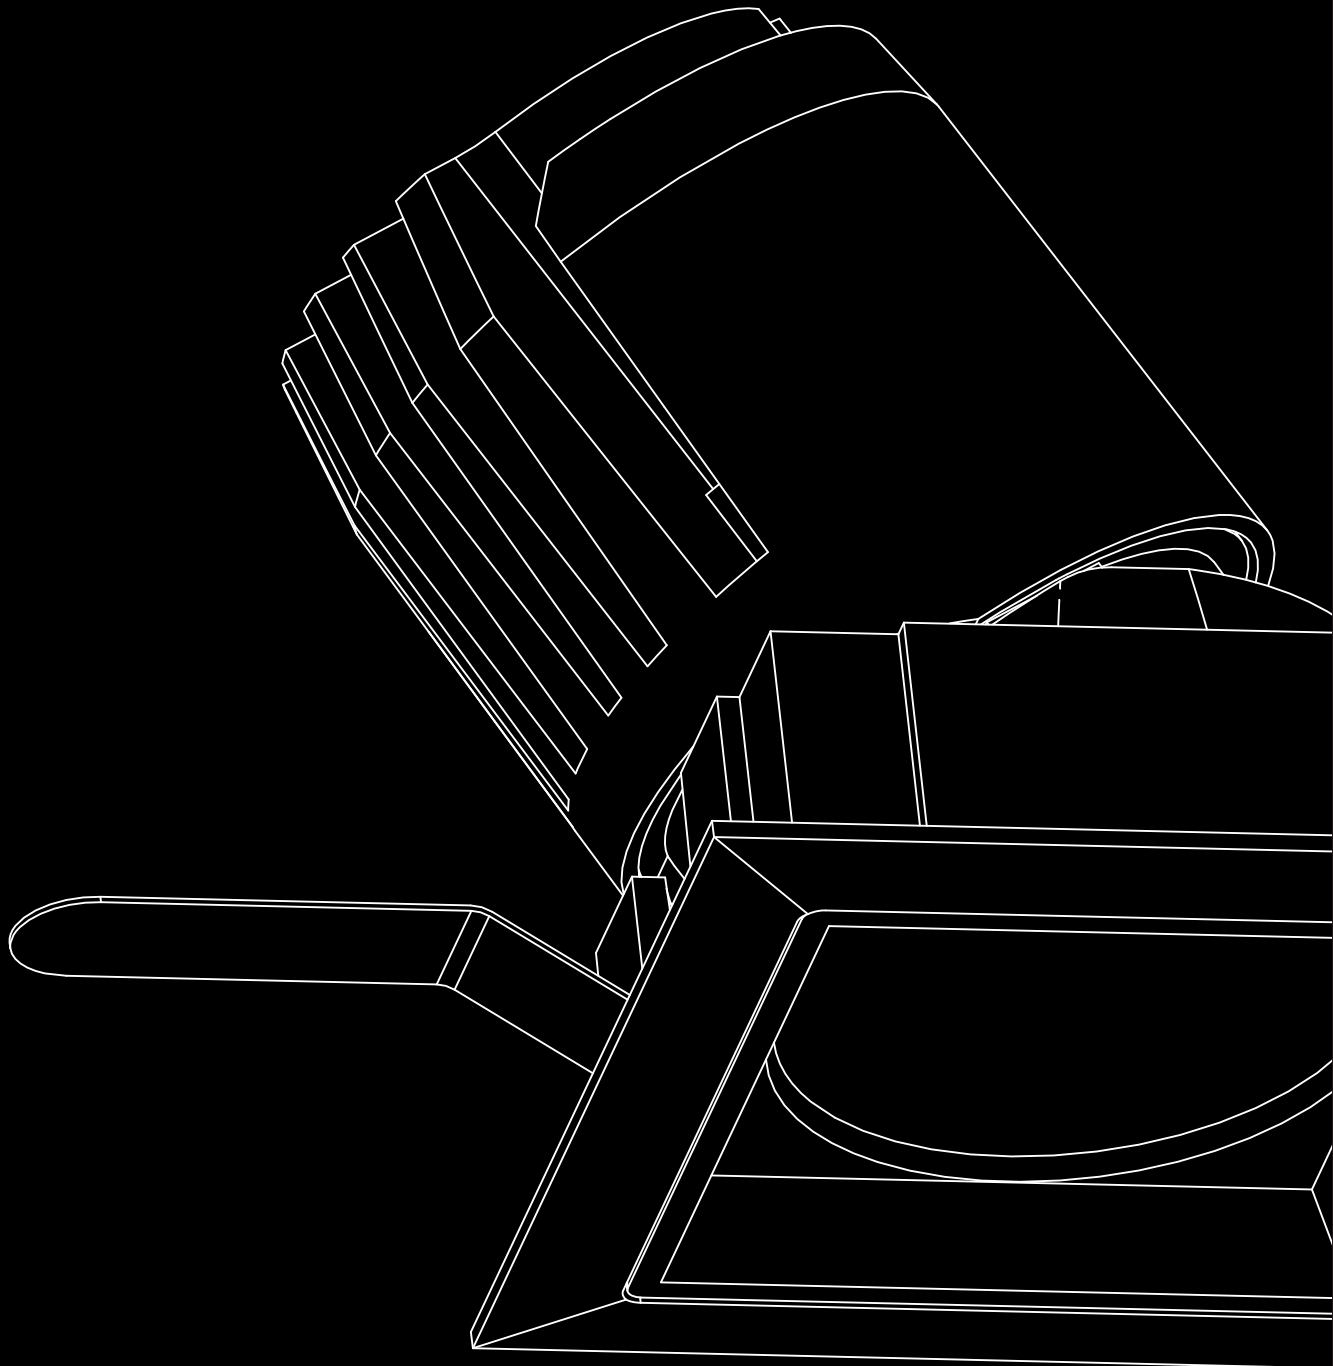

**EDGE II**  
Glare-less Down Light.



**THE HOSPITALITY LUMINAIRE**

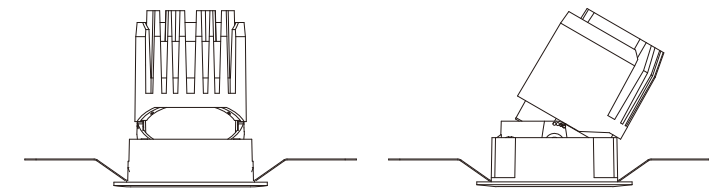

This glare-free fixture family allows architects and designers to work with different lighting applications. Thanks to precise engineering, the use of superior reflector materials and various glare control accessories, the EDGE II fixtures guarantee maximum visual comfort and optimal optic performance. The miniature design with clean sightlines make people focus on the light instead of the luminaire.

Beams, effects, filters, output levels, trimless or with trim, fixed or adjustable, and smart controls like Casambi, Dali, phase-cut, the vast range of options allow you to work with different lighting demands throughout the entire project. Furthermore, the unique interchangeable light engine design helps perfectly protect the ceiling during maintenance.










## Trim




## Trimless

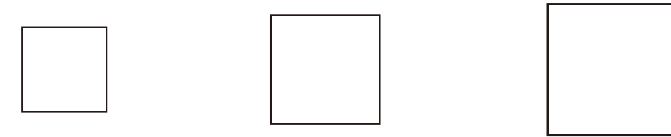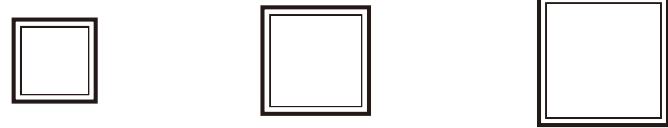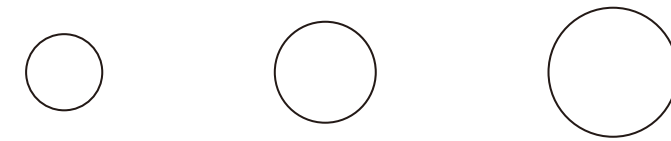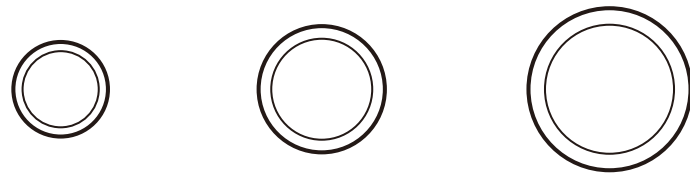

55

75

95



55


75

95







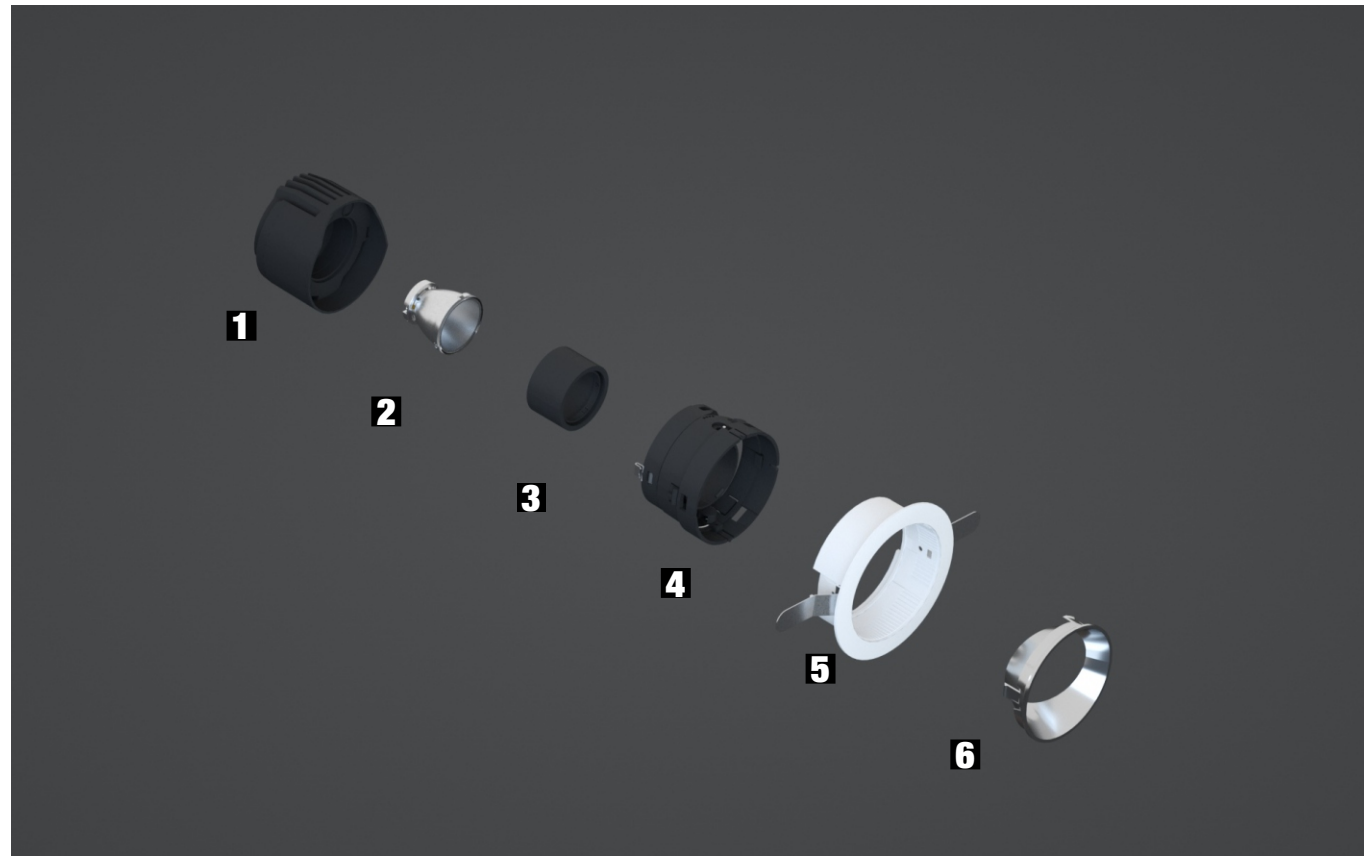
















EDGE II trim version comes with minimal sightline only 5mm, which draws no attention to the frame but to the light.

EDGE II trimless version gives you a very clean ceiling, it maximizes the eye comfort and minimizes the visual impact.

# EDGE II Lighting System Accessories



- 1** LED Module
- 2** Reflector
- 3** Reflector holder
- 4** Ring
- 5** Trim
- 6** Anti-glare reflector

<b>4</b> Ring	 Fixed	 Adjustable				
<b>5</b> Trim	 Trim	 Trimless	 Trim	 Trimless		
<b>6</b> Reflector	 Fixed	 Adjustable	 Fixed	 Adjustable		
	 Wall Washer	 Wall Washer				
<b>6</b> Color	 Charm Gold	 Bright Black	 Matte White	 Matte Black	 Flax Silver	 Blinding Black
<b>Accessories</b>	 Elliptical hole	 Pin hole				
	 Honeycomb	 Oval diffuser	 Soft beam diffuser			


# IP65

For Wet Environment




## UGR<6



Light source, deep hiding, anti  
dazzle the whole series of  
products have excellent anti  
glare effect, with the shading  
angle greater than 40° and  
UGR less than 6

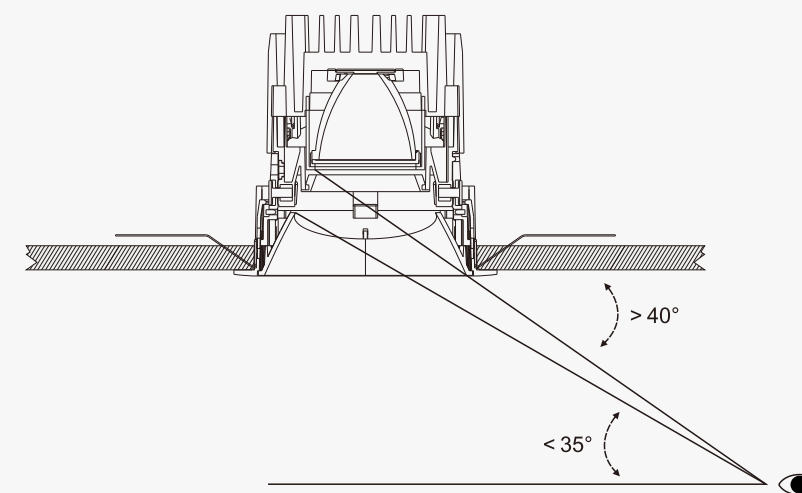

# Ceiling-Care

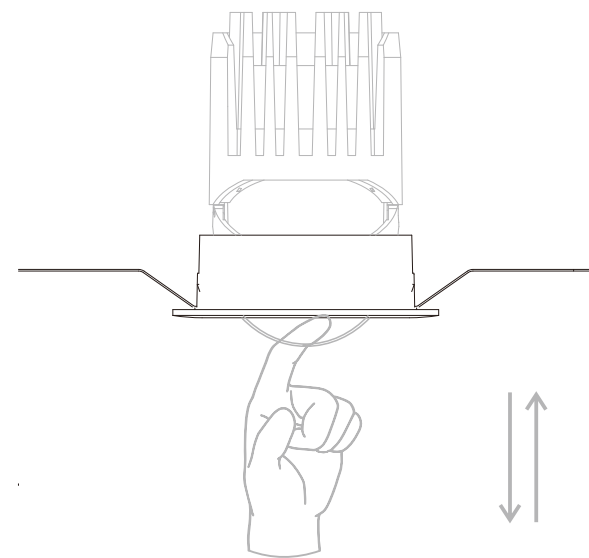


# Installation Instruction

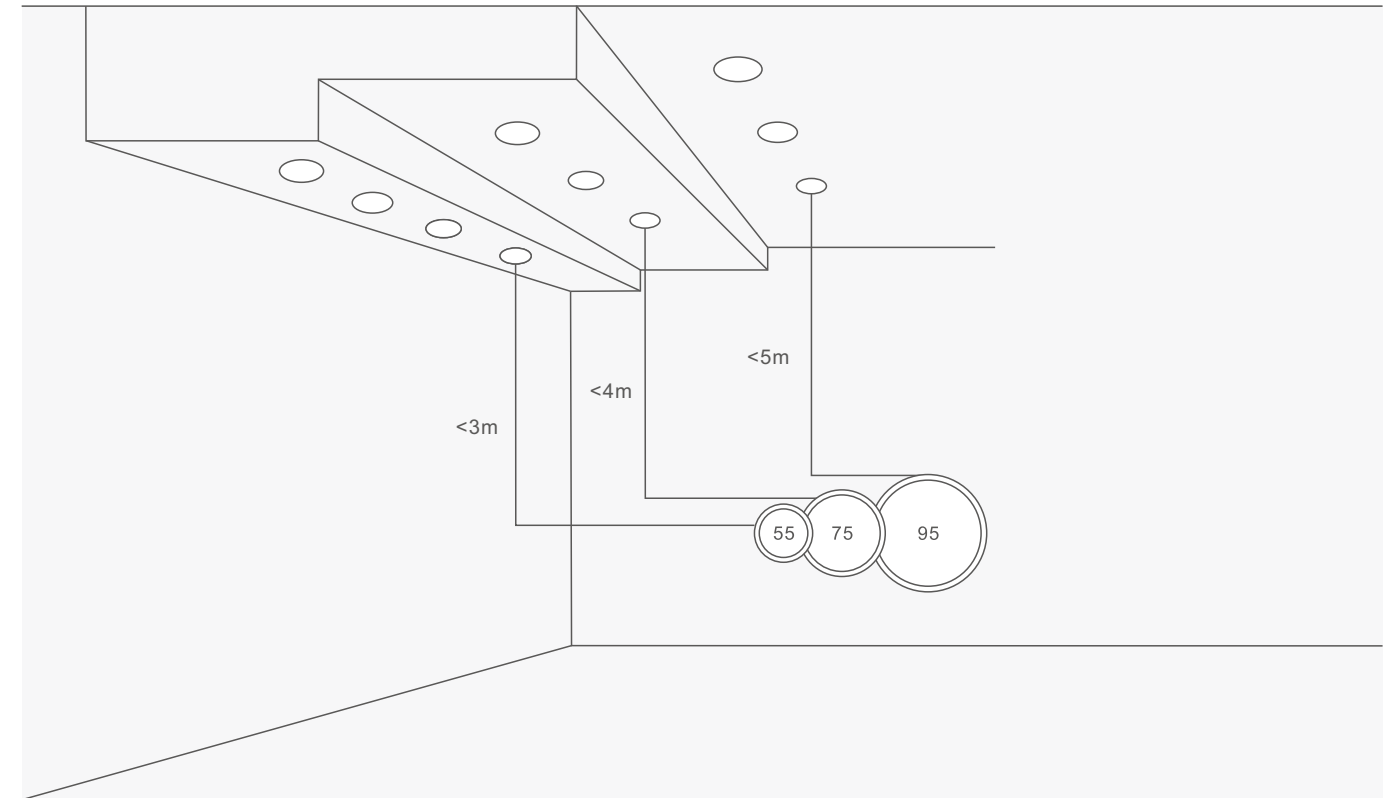


Φ55mm

9W



Φ75mm

11W/13W

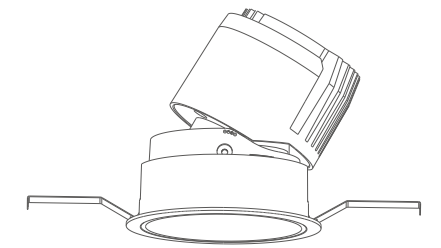


Φ95mm


15W/20W




# EDGE II Wall Washer

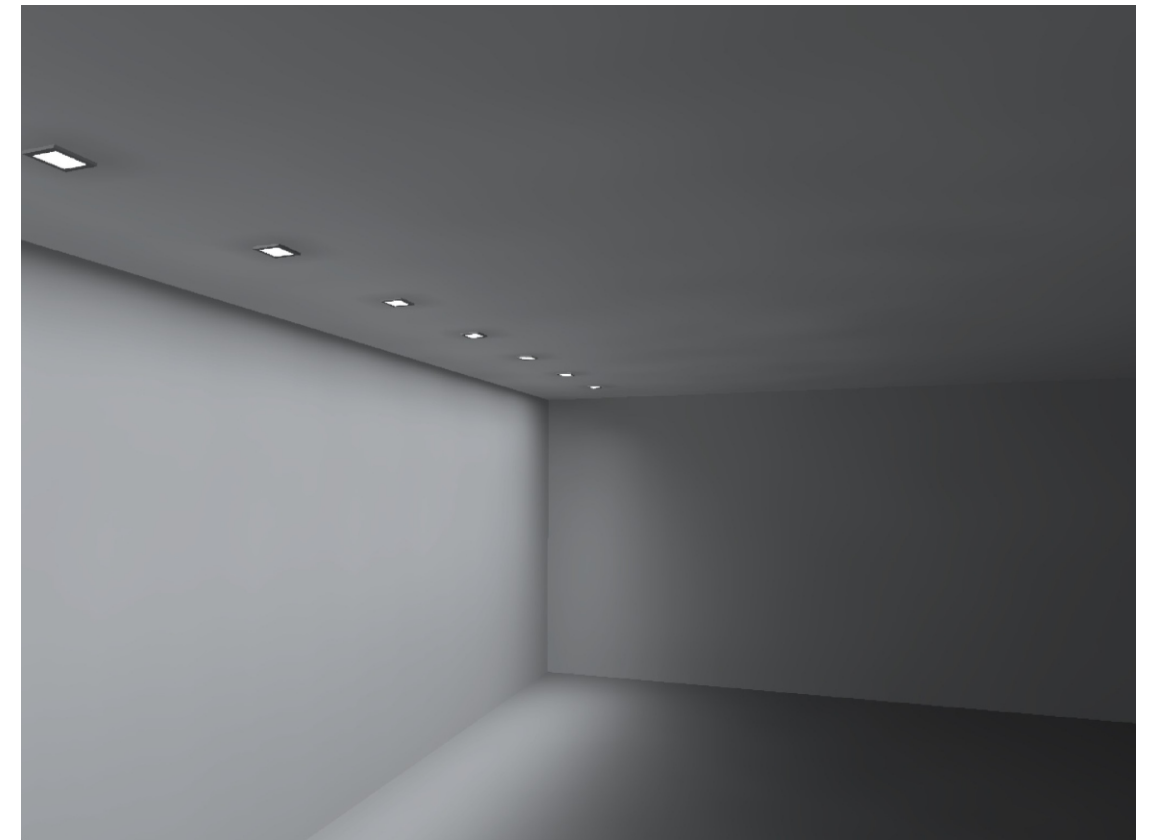

## Installation Instruction

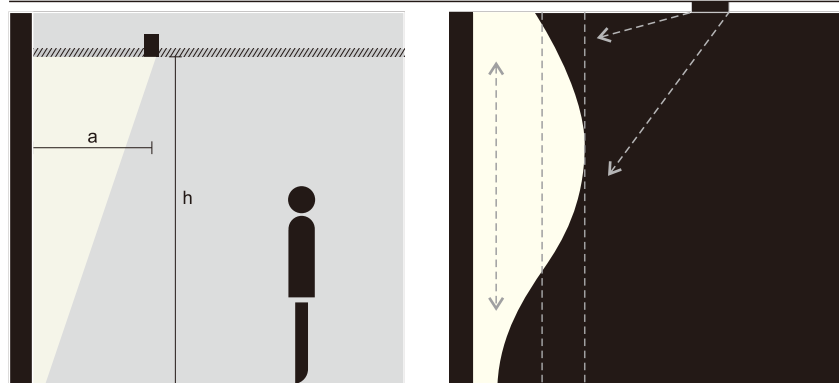

The distance from the fixture to the wall(a) is generally 1/3 of the height of the wall(h) and the distance between the fixtures(d) is 0.8 meters, achieving a very uniform wall washing effect.

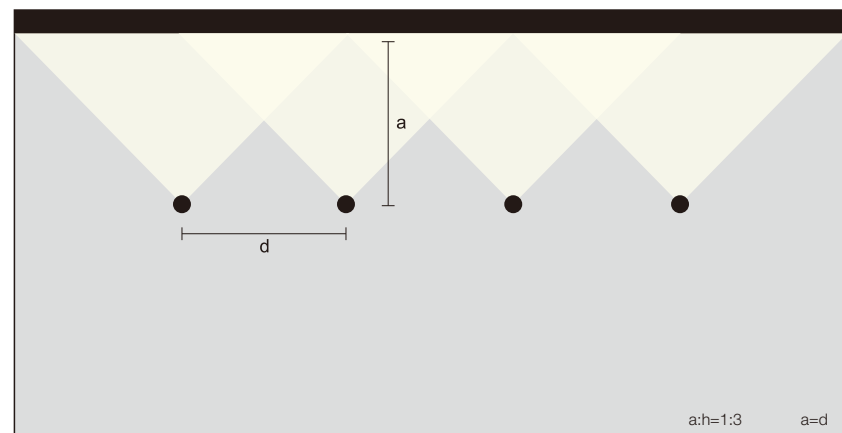


Every lighting task requires specific lighting tools. For this reason, we offer lighting experts different light distributions and beam shapes. Beside the spot reflectors, you can also find wallwasher from our multi-functional EDGE II family. It is equipped with a specially developed wallwasher reflector for efficient and uniform illumination on the wall from floor to ceiling. To obtain the best result, follow the recommended spacing and set out from the wall.




## Fixed





Featured with uniform light and glare-free illumination, combined with a vast range of options including different beams, colours temperatures, outputs, CRI and colour finishes, glare control accessories, all these together make it a truly versatile architectural lighting tool. The replaceable light engine with a pull-ring makes it a unique product which protects the ceiling during maintenance.

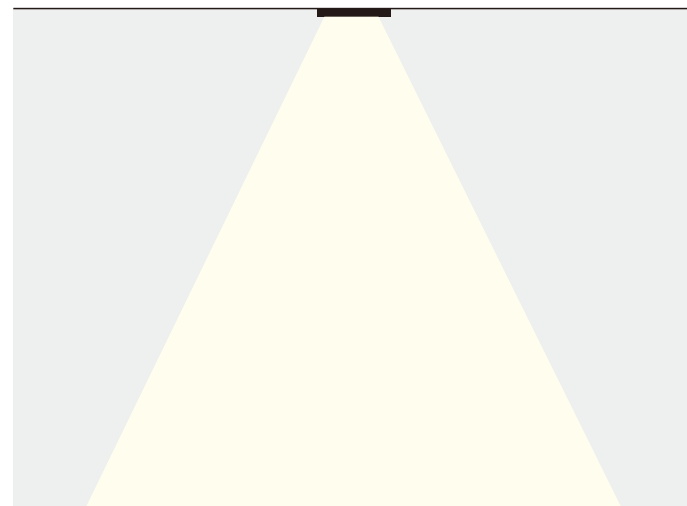

## Adjustable

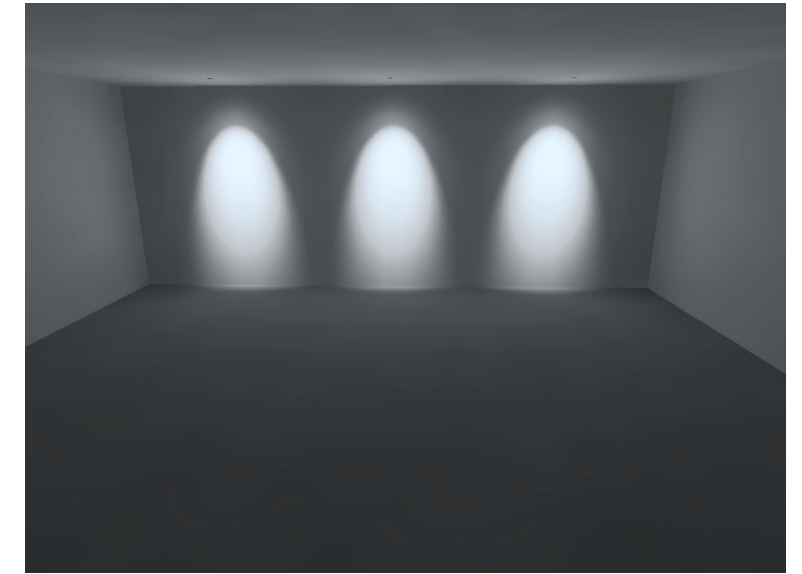


This 30° adjustable family is a versatile accent lighting solution. The tilt mechanism which allows the luminaire to be angled up to 30° makes it an ideal choice for emphasizing of individual objects or architectural elements. The locator holes on each luminaire enables precise beam alignment for multiple fixtures.

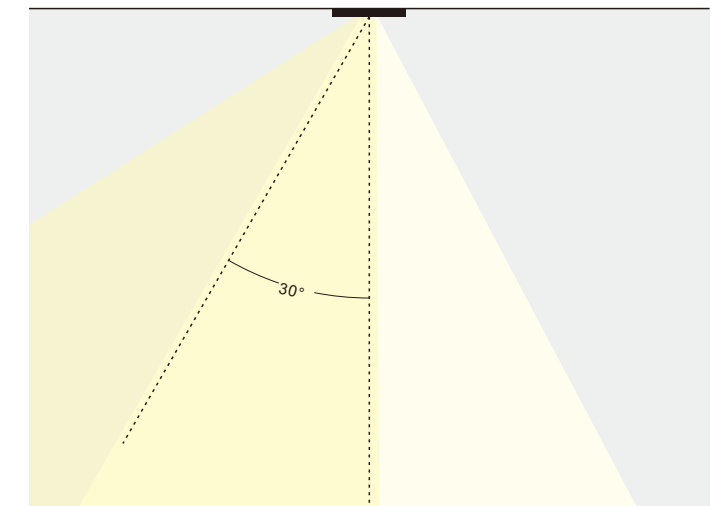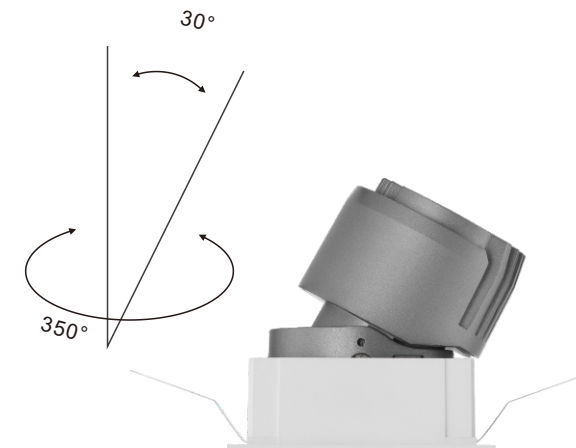

# Play with your light


Light sets atmosphere in different life scenarios whenever in shopping, work, listening to music, watching TV, receiving a visitor, with family or even when tasting whiskey, adjust the brightness or tune the color of different lights may bring you different motions and feelings in need. Play with our smart EDGE II lighting system to achieve whatever atmosphere you desire in daily life. You can easily do this by using either your smart phone or a remote controller by simply pressing the button. CASAMBI, DALI, Phase-cut, Knob Dimming are all included in this smart lighting system.

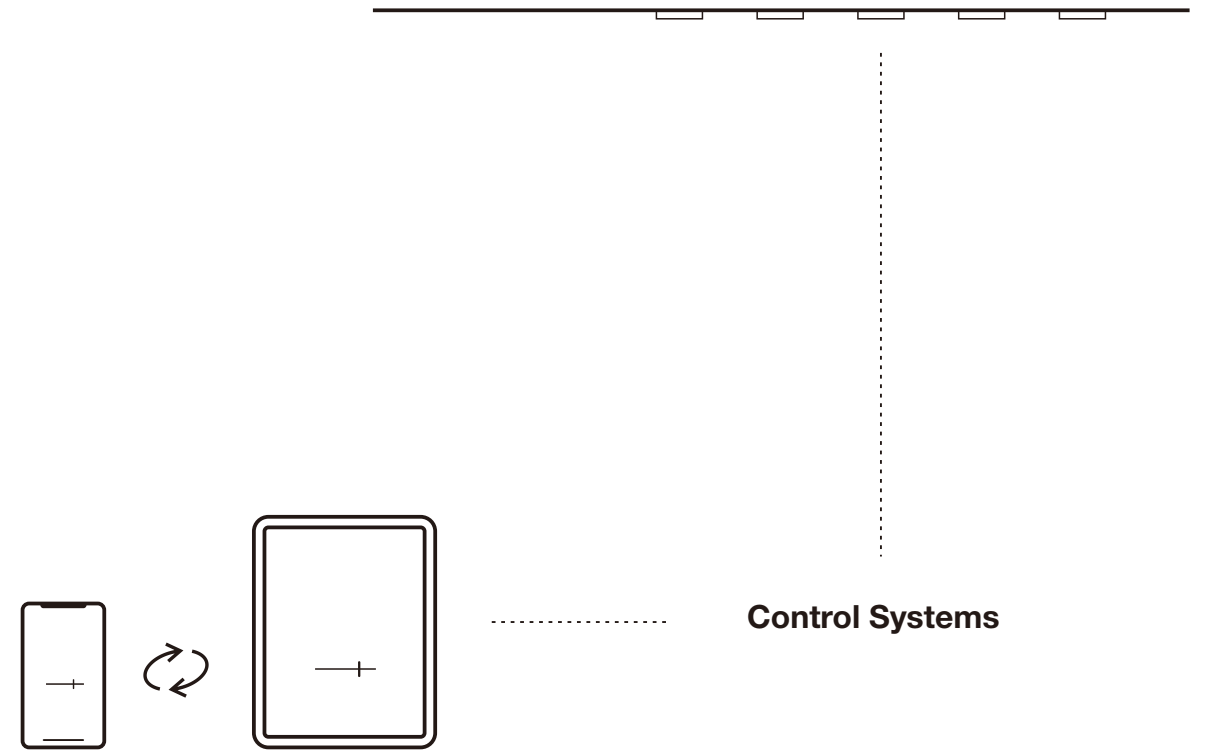

# EDGE II Warm Dimming



2000K | 3000K

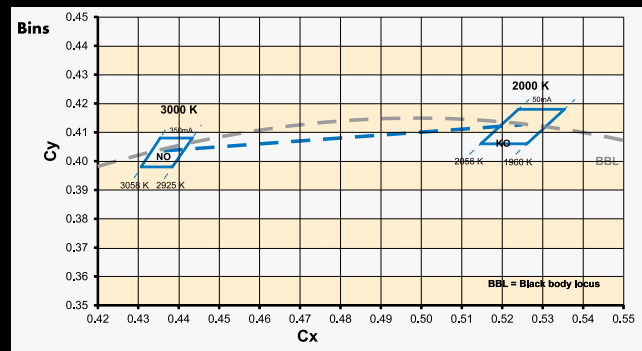

COLOUR TUNING BY DIM LEVEL  
 - 50 mA: 2000 K  
 - 350 mA: 3000 K


NARROW COLOUR TOLERANCES:  
 3 STEP MacAdam

HIGH COLOUR RENDERING INDEX:  
 CRI > 90

COMPACT SHAPE  
 - 13.5 x 13.5 mm  
 - LES: Ø 10 mm

# Perfect Ambience Created by Light

Tunable lighting enriches your life more than ever through superb optimizations

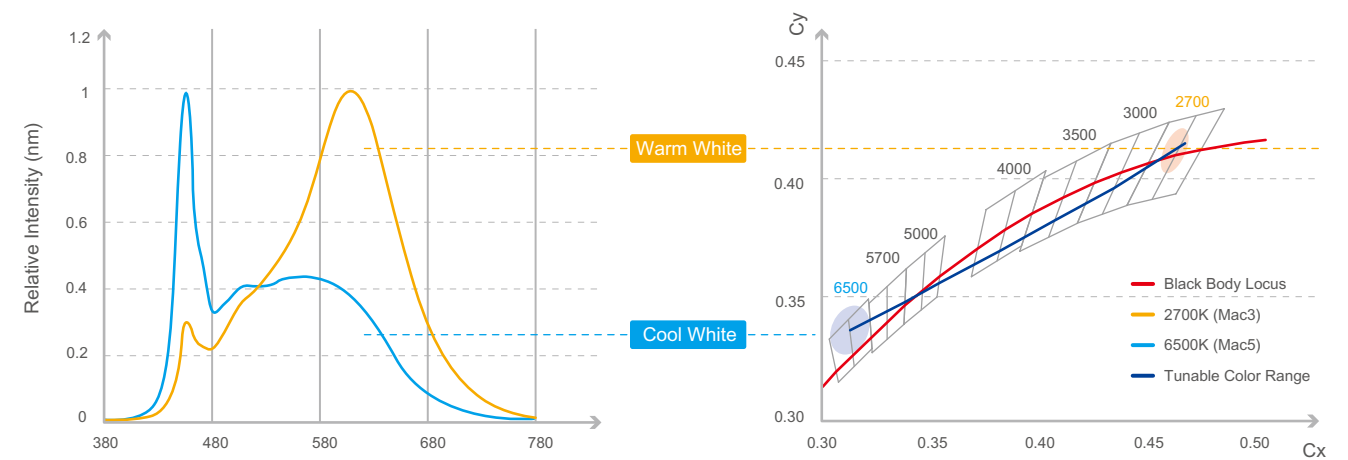


Wide Range of Color Temperature  
 From 2700K through 6500K white color tunable





**REG55**

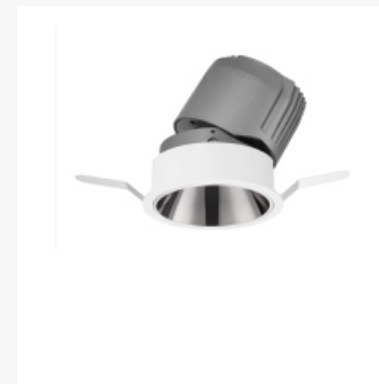

**REG2055AR**

9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



**REG2055AS**

9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



**REG2055FR**

9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645




**REG2055FS**

9W	(lm)		
	2700K	3000K	4000K
20°	460	495	559
30°	503	541	626
40°	532	572	645



**REG75**

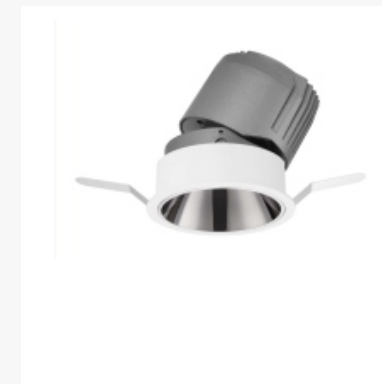

**REG2075AR**

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



**REG2075AS**

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



**REG2075FR**

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872




**REG2075FS**

11W	(lm)		
	2700K	3000K	4000K
20°	676	727	819
31°	680	731	824
40°	719	773	872



**REG2075WR**

11W	(lm)		
	2700K	3000K	4000K
S	368	391	408
M	456	485	561
F	424	451	468

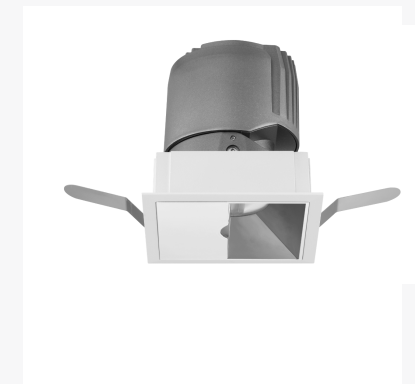

**REG2075WS**

11W	(lm)		
	2700K	3000K	4000K
S	368	391	408
M	456	485	561
F	424	451	468



**REG95**



**REG2095AR**

20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334



**REG2095AS**

20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334



**REG2095FR**

20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334




**REG2095FS**

20W	(lm)		
	2700K	3000K	4000K
20°	1128	1213	1307
25°	1193	1283	1649
38°	1233	1326	1334



**REG2095WR**

20W	(lm)		
	2700K	3000K	4000K
20°	689	733	809
25°	756	804	846
38°	794	845	903

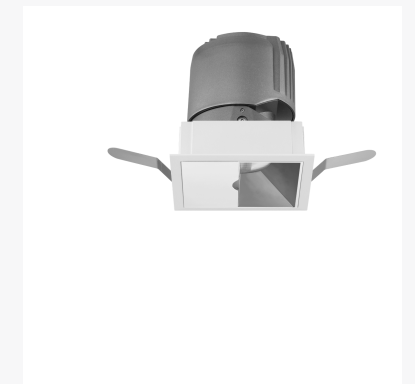

**REG2095WS**

20W	(lm)		
	2700K	3000K	4000K
20°	689	733	809
25°	756	804	846
38°	794	845	903

