

JIBE LIGHTING — HEADQUARTERS
Hogebrinkerweg 14V - 3871 KN Hoevelaken
Netherlands Tel: +31 (0)33 844 7111
info@jibe.lighting - www.jibe.lighting



جيبايز


LED THERE BE LIGHT

JIBE LIGHTING — GERMANY
Marie-Curie-Ring 38- 63477 Maintal
Germany Tel: +49 (0)6181 90 90 509
Mob : +49 (0)162 26 36 614
fax : +49 (0)6181 61 01 618
s.fischer@jibe-lighting.de

JIBE LIGHTING — NORTH AMERICA
5917 NW 63 Way - Parkland FL 33067
USA Tel: 954-899-4040
todd.darling@jibeusa.lighting

© 2020 Jibe Lighting - all rights reserved
Jibe reserves the right to alter material, dimensions and characteristics without prior notice.
Read installation instructions carefully. Technical information on the installation instruction
has precedence over the information in the brochure.
Our general terms and conditions shall apply notwithstanding any stipulation to the contrary
to all the orders and agreements with Jibe.
You can obtain a copy of these conditions on demand.
For latest information and specifications of the full product range
visit www.jibe.lighting

LED
CEILING LIGHT
SERIES

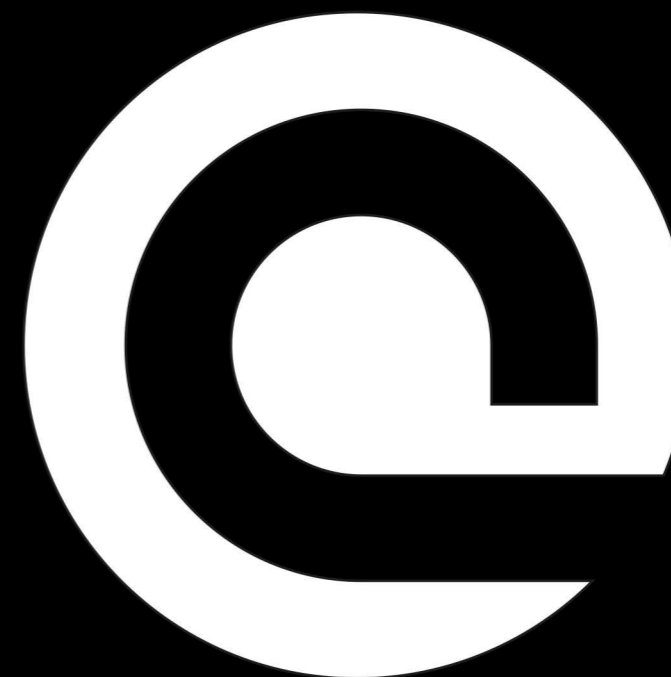


جيبايز




LED Ceiling Light /Series/

LED ceiling light in all its forms—most of the time plays a secondary role of attention but attach great importance to the general lighting of a room. It puts your room in best lighting effect by innovative lighting solutions and design. Jibe Lighting ceiling light series has a low profile design providing a discreet, robust and stylish emergency, sensor and main luminaires.

It's with Elegantly slim and offered as both emergency and mains luminaires. It allows same seamless profile to be used throughout an installation. All options in the range are ideal for all projects when a high quality luminaire is required. Offering wide flexibility in facility lighting which is best suited to residential and commercial areas.

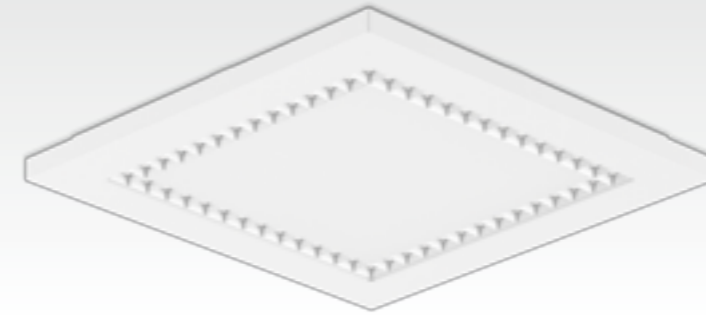

JAL37 Ceiling light

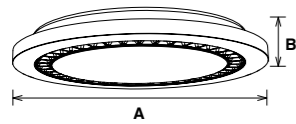

JAL37 Anti-glare LED ceiling light adopts multi-louver reflectors, effectively reduces glare index(UGR) to protecting human eyes. High luminous efficiency, 94-V0 fire-rated PC material housing and fast connection terminal design make it to be widely used in various lighting applications. Microwave Sensor and Triac dimmable function are available.


- ▶ 100° IP40
- ▶ DIM ((••))
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL37-10-12W	12W	Ø250x33	1520lm	0.54	20PCS
JAL37-12-15W	15W	Ø300x33	2000lm	0.80	10PCS
JAL37-16-25W	25W	Ø400x33	3120lm	1.33	10PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White

JAL38 Ceiling light

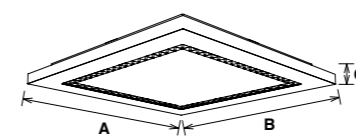

JAL38 Anti-glare square ceiling light adopts multi-louver reflectors, effectively reduces glare index(UGR) to protecting human eyes. High luminous efficiency, 94-V0 fire-rated PC material housing and fast connection terminal design make it to be widely used in various lighting applications. Microwave Sensor and Triac dimmable function are available.

- ▶ 100° IP40
- ▶ DIM ((••))
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL38-10-12W	12W	250x250x33	1560lm	0.66	20PCS
JAL38-12-15W	15W	300x300x33	1890lm	0.90	10PCS
JAL38-16-25W	25W	400x400x33	3050lm	1.58	10PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White



JAL08B Ceiling light

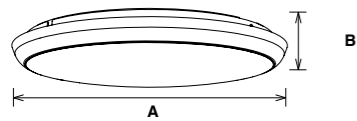

JAL08B is a classical and functional ceiling light, especially in emergency, sensor, 3CCT changeable (by slide switch or remote control), triac dimmable functions etc. Meanwhile it's with IP54 waterproof design, 8/10/12/14/16 inch sizes as options, It's ideal luminaire to any indoor applications.

- ▶ 120° IP54
- ▶ DIM SLIDE SWITCH 3CCT Smart Lighting
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE CB TÜV Rheinland CERTIFIED



Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL08B-8-12W	12W	Ø200x48	1330lm	0.42	20PCS
JAL08B-10-12W	12W	Ø250x48	1300lm	0.66	20PCS
JAL08B-12-18W	18W	Ø300x40	2060lm	0.80	10PCS
JAL08B-12-25W	25W	Ø300x40	2650lm	0.80	10PCS
JAL08B-14-25W	25W	Ø350x40	2900lm	1.30	10PCS
JAL08B-16-30W	30W	Ø400x52	3360lm	1.40	10PCS


CCT — 3000K 4000K 5000K 5700K

Finish — White Black Silver

Ring — Nickel Brushed 10"- 250mm / 12"- 300mm



JAL12B Ceiling light

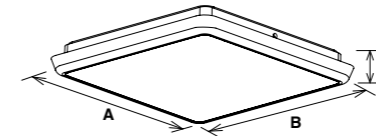

JAL12B is a classical and functional square ceiling light, especially in emergency, sensor, 3CCT changeable (by slide switch or remote control), triac dimmable functions etc. Meanwhile it's with IP54 waterproof design, 10/12/14/16 inch sizes as options, It's ideal luminaire to any indoor applications.

- ▶ 120° IP54
- ▶ DIM SLIDE SWITCH 3CCT Smart Lighting
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE CB TÜV Rheinland CERTIFIED




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL12B-10-12W	12W	250x250x50	1330lm	0.75	20PCS
JAL12B-12-18W	18W	300x300x40	1995lm	0.96	10PCS
JAL12B-12-25W	25W	300x300x40	2775lm	0.96	10PCS
JAL12B-14-25W	25W	350x350x41	2775lm	1.24	10PCS
JAL12B-16-30W	30W	400x400x51	3330lm	2.00	10PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black Silver



JAL85 Ceiling light

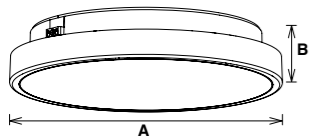


JAL85 is an economic and integrated slim design ceiling light with high luminous flux; Waterproof function (IP54) expand the application area; Presser device makes the installation easier; Triac dimmable, Color switchable combines dimmable both available.

- ▶

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL85-10-12W	12W	Ø250x64	1060lm	0.50	20PCS
JAL85-12-15W	15W	Ø300x66.5	1820lm	0.70	10PCS
JAL85-16-25W	25W	Ø400x69	2600lm	1.14	10PCS

CCT 3000K 4000K 5000K 5700K **Finish** White Black Silver

JAL87 Ceiling light

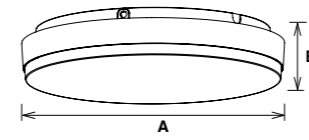

JAL87 is a new super slim design ceiling light, adopting high lumen SMD LED and lighter weight fire-rated material to ensure better heat resistance and corrosion resistance. The base and shade are detachable which make easier maintenance and installation. It also supports functions including Triac, 0-10V, DALI dimmable; Changeable power and 3 CCT by DIP switch(optional); Adjustable sensor and Emergency etc.


- ▶

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL87-11-12W	12W	Ø275x65	1460lm	0.70	12PCS
JAL87-11-18W	18W	Ø275x65	2200lm	0.70	12PCS
JAL87-11-25W	25W	Ø275x65	3000lm	0.70	12PCS
JAL87-14-25W	25W	Ø350x65	2900lm	1.00	6PCS
JAL87-14-30W	30W	Ø350x65	3200lm	1.00	6PCS

CCT 3000K 4000K 5000K 5700K **Finish** White Black Silver



JAL47 Ceiling light

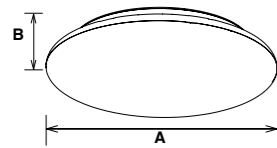

JAL47 is a flying saucer-shaped led ceiling light, super slim and minimalistic design. Replaceable built-in power supply design with easy maintenance. Easy installation, it is twist mounting after fixing the holder on the ceiling, avoid extra nail screw work, safe and convenient.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL47-10-12W	12W	Ø250x53	1200lm	0.53	20PCS
JAL47-12-18W	18W	Ø300x58	1900lm	0.76	10PCS
JAL47-12-25W	25W	Ø300x58	2560lm	0.76	10PCS
JAL47-16-25W	25W	Ø400x66	2550lm	1.31	10PCS
JAL47-16-30W	30W	Ø400x66	3020lm	1.31	10PCS

CCT — 3000K 4000K 5000K 5700K **Finish** — White Black Silver



JAL47S Ceiling light

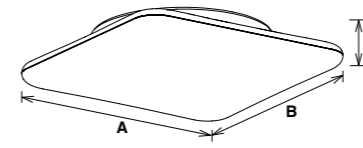

JAL47S is a square and flying saucer-shaped led ceiling light, super slim and minimalistic design. Replaceable built-in power supply design with easy maintenance. Easy installation, it is twist mounting after fixing the holder on the ceiling, avoid extra nail screw work, safe and convenient.

- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL47S-12-18W	18W	300x300x58	1920lm	0.96	10PCS
JAL47S-12-25W	25W	300x300x58	2670lm	0.96	10PCS
JAL47S-16-25W	25W	400x400x58	2610lm	1.66	10PCS
JAL47S-16-30W	30W	400x400x58	3160lm	1.66	10PCS

CCT — 3000K 4000K 5000K 5700K **Finish** — White Black Silver




Flat



Curved
(Recessed)

JAL99 Ceiling light



JAL99 ceiling light is with AL6063 aluminum housing, SMD LED chips and Opal or Microprismatic diffuser. Size options: 400mm, 600mm, 800mm, 1000mm. It can do CCT adjustable and wattage adjustable, multiple installation ways available as surface mounted, recessed, Suspended. It is with Osram flicker free driver, DALI 2.0 with push dim available.

- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL99-16-40W	40W	Ø400x86	4300lm	3.20	6PCS
JAL99-24-60W	60W	Ø600x86	6500lm	4.50	2PCS
JAL99-32-80W	80W	Ø800x86	8600lm	6.80	1PCS
JAL99-40-100W	100W	Ø1000x86	10800lm	10.50	1PCS

CCT — 3000K — 4000K — 5000K — 5700K

Finish — White Black




Steel wire suspension



Wire harness suspension



Pendant rod suspension

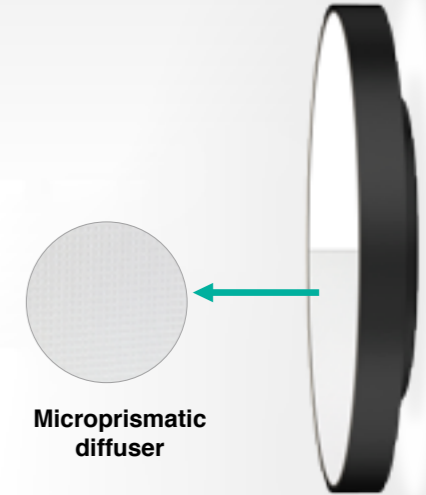

Microprismatic
diffuser


Wall mounted
(Indirect lighting)



Wall mounted
(Direct lighting)



JAL24A Ceiling light

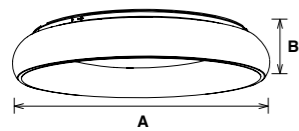

JAL24A is with hollow shape and curved light direction design, the circular light output offers a magic 3D effect; rotate buckle on the base to make installation easier and faster, it's very suitable for leisure location.


- ▶ 120°
- ▶ IP40
- ▶ DIM
- ▶ AC 100-277V
- ▶ AC 200-240V
- ▶ PF ≥ 0.9
- ▶ CRI ≥ 80
- ▶ SAA
- ▶ RoHS
- ▶ CE
- ▶ CB

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL24A-12-18W	18W	Ø298x51	1450lm	1.08	10PCS
JAL24A-12-25W	25W	Ø298x51	2000lm	1.08	10PCS
JAL24A-16-35W	35W	Ø400x68	3100lm	1.89	6PCS

CCT — 3000K 4000K 5000K 5700K Finish — White Black Silver



JAL24B Ceiling light



JAL24B is with hollow shape, curved light direction and suspended installation design, the circular light output offers a magic 3D effect; rotate buckle on the base to make installation easier and faster, it's very suitable for leisure location.


- ▶ 120°
- ▶ IP40
- ▶ DIM
- ▶ AC 100-277V
- ▶ AC 200-240V
- ▶ PF ≥ 0.9
- ▶ CRI ≥ 80
- ▶ SAA
- ▶ RoHS
- ▶ CE
- ▶ CB

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL24B-12-18W	18W	Ø298x50x1525	1450lm	0.87	10PCS
JAL24B-12-25W	25W	Ø298x50x1525	2000lm	0.87	10PCS
JAL24B-16-35W	35W	Ø400x67x1542	3100lm	1.55	6PCS

CCT — 3000K 4000K 5000K 5700K Finish — White Black Silver



JAL41A Ceiling light

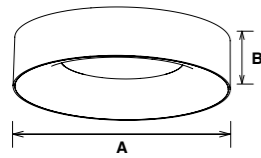

JAL41A ceiling light (full PC adopts elegant and concave design, it makes the luminous surface compact and with magic 3D effects. Surface mounted and suspended installation are also optional, equipped with rotating lamp fixture, makes the surface mounted installation much easier.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL41A-12-18W	18W	Ø300x71	1710lm	1.04	6PCS
JAL41A-16-25W	25W	Ø400x71	2370lm	1.53	6PCS

CCT — 3000K 4000K 5000K 5700K Finish — White Black Silver



JAL41B Ceiling light



JAL41B ceiling light (full PC) adopts elegant and concave design, it makes the luminous surface compact and with magic 3D effects. Surface mounted and suspended installation are also optional, equipped with rotating lamp fixture, makes the surface mounted installation much easier.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL41B-12-18W	18W	Ø300x71x1200	1710lm	1.53	4PCS
JAL41B-16-25W	25W	Ø400x71x1200	2370lm	1.86	4PCS

CCT — 3000K 4000K 5000K 5700K Finish — White Black Silver



JAL51 Ceiling light

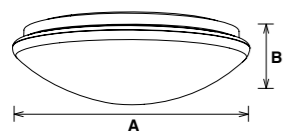

JAL51 is a Tri-CCT changeable ceiling light with PC diffuser and aluminum base, CCT is adjusted via a switch on the back of the lamp, 350mm and 380mm, 350mm available. It also comes with emergency function.

- ▶ 120° IP20
- ▶ SLIDE SWITCH 3 in 1 Emergency Smart Lighting
- ▶ AC 220-240V PF ≥ 0.5 PF ≥ 0.9 CRI ≥ 80
- ▶ RoHS


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL51-14-16W	16W	Ø350x106	1570lm	0.64	5PCS
JAL51-15-25W	25W	Ø380x120	2500lm	0.74	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White



JAL71 Ceiling light

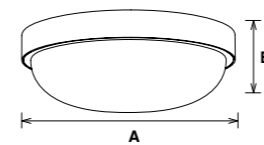


JAL71 is a new design IP54 grade ceiling light, which be with replaceable module design for fast installation, fire-rated PC diffuser, ensure safety performance. Triac dimmable available. It's widely use to bathroom and indoor corridor.

- ▶ 120° IP54
- ▶ DIM Smart Lighting
- ▶ AC 100-240V PF ≥ 0.9 CRI ≥ 80
- ▶ RoHS CE


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL71-12-8W	8W	Ø300x105	865lm	1.10	4PCS
JAL71-12-15W	15W	Ø300x105	1530lm	1.10	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black Silver

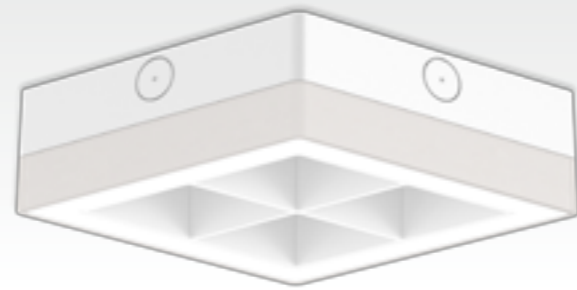

JAL42 Ceiling light

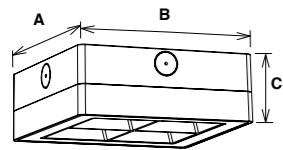

JAL42 is an anti-glare DIY ceiling light which with unique, compact and elegant design. It can be installed optionally into different shapes and images with available different frame color such as red, green, gray etc.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL42-6-12W	12W	160x160x62	940lm	0.56	24PCS

CCT — 3000K 4000K 5000K 5700K Finish — White Black Gray



JAL48 Ceiling light

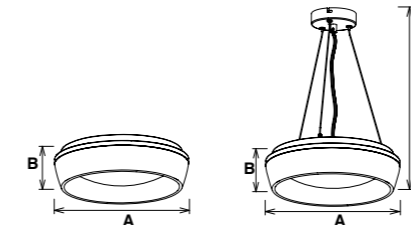

JAL48 is a luxurious decorative ceiling light which with faceted transparent cover, Tri-CCT changeable and dimmable function. surface mount and pendant install available.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL48-12-18W	18W	Ø300x87.5	1750lm	1.32	5PCS

CCT — 3000K 4000K 5000K 5700K Finish — White



JAL45 Ceiling light

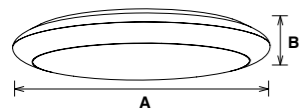

JAL45 is a module design ceiling light, easy to install and maintenance. It's with fire rated PC material, IP65 waterproof and IK10 impact resistant. It also supports dimmable, sensor, emergency version, 10/12/16/20 inch are available for this product.


- ▶ 120° IP65 DIM DALI 0-10V SLIDE SWITCH 3 in 1
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL45-10-12W	12W	Ø270x70	1280lm	0.76	10PCS
JAL45-12-18W	18W	Ø320x70	1940lm	1.00	6PCS
JAL45-12-25W	25W	Ø320x70	2700lm	1.00	6PCS
JAL45-16-25W	25W	Ø420x85	2650lm	1.59	6PCS
JAL45-16-30W	30W	Ø420x85	3150lm	1.59	6PCS
JAL45-20-30W	30W	Ø520x85	3180lm	2.40	6PCS
JAL45-20-35W	35W	Ø520x85	3670lm	2.40	6PCS
JAL45-20-40W	40W	Ø520x85	4160lm	2.40	6PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JAL52 Ceiling light



JAL52 is 2.4G wireless remote controller ceiling light, it supports dimmable, color changeable (controlled by switch/ remote controller/APP), night light, power off memory and timing switch functions etc. Low power consumption, fast switch between different functions, excellent stability and strong anti-interference capacity make this lamp outstanding.

- ▶ 120° IP20 DIM AC 200-240V PF≥0.9 CRI≥80
- ▶ RoHS CE


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL52-45W(TYPE A)	45W	Ø600x106	3735lm	2.50	1PCS
JAL52-45W(TYPE B)	45W	Ø670x106	3735lm	2.80	1PCS

CCT 3000K 4000K 5700K

Finish White



JAL55 Bulkhead

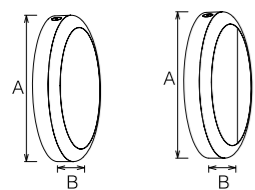

JAL55 is a ceiling light which comes with multifunctions, triac dimmable, emergency, sensor, color switchable, wattage switchable. Its cover can be circular and semi-circular diffuser to create different lighting effect, IP54 and IP65 optional.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL55-12-15W	15W	Ø300x60	1480lm	0.96	6PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black

JAL65 Bulkhead



JAL65 is IP65 IK10 bulkhead which adopts Die-casting aluminum body and 94-V0 fire-rated PC cover. This fixture provides an alternative to the color changeable and Emergency function. These lights are a perfect answer to complete your outdoor look.

- ▶
- ▶
- ▶
- ▶


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL65-10-12W	12W	Ø250x58	1250lm	1.05	10PCS
JAL65-10-18W	18W	Ø250x58	1850lm	1.15	10PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black Gray



JAL66 Bulkhead




JAL66 is IP65 IK10 bulkhead which adopts Die-casting aluminum body and 94-V0 fire-rated PC cover. This fixture provides an alternative to the color changeable. These lights are a perfect answer to complete your outdoor look.

- ▶ IK10, 110°, IP65
- ▶ DIM, SLIDE SWITCH
- ▶ AC 200-240V, PF≥0.9, CRI≥80
- ▶ SAA, RoHS, CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL66-10-12W	12W	Ø250x74	1100lm	1.10	10PCS

CCT: 3000K, 4000K, 5000K, 5700K | Finish: White, Black, Gray

JAL96 Bulkhead



JAL96 is IP65 and IK10 LED ceiling light, which adopts high lumen SMD LED and lighter weight fire-rated material to ensure better heat resistance and corrosion resistance. Wall mounted and surface mounted for options. Multiple functions such as 3 CCT and power interchangeable, emergency, adjustable sensor, triac/0-10V/DALI dimmable are available.


- ▶ IK10, 110°, IP65
- ▶ DIM, DALI, 0-10V, SLIDE SWITCH, Emergency, Adjustable Power
- ▶ AC 100-240V, PF≥0.9, CRI≥80
- ▶ SAA, RoHS, CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL96-8-12W	12W	Ø200x60	1250lm	0.48	12PCS
JAL96-11-12W	12W	Ø275x60	1350lm	0.85	12PCS
JAL96-11-18W	18W	Ø275x60	2000lm	0.85	12PCS
JAL96-11-25W	25W	Ø275x60	2650lm	0.85	12PCS
JAL96-14-25W	25W	Ø350x60	2850lm	1.38	6PCS
JAL96-14-30W	30W	Ø350x60	3150lm	1.38	6PCS

CCT: 3000K, 4000K, 5000K, 5700K | Finish: White, Black



JAL91 Bulkhead

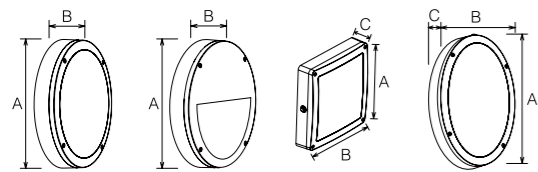

JAL91 is with multiple shapes design, including circular, semicircle, square and oval. Adopt high lumen SMD LED and lighter weight fire-rated material which can ensure better heat resistance and be with corrosion resistance. Wall mounted and surface mounted available. The base and shade are detachable which make easier maintenance and installation. Remote sensor control for 15W &25W .

- 110° Beam Angle
- IP65 Protection
- DIM, DALI, 0-10V, SLIDE SWITCH, Wireless, Adjustable Power
- AC 100-240V, AC 200-240V, PF≥0.9, CRI≥80
- SAA, RoHS, CE, TÜV


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/ CTN
JAL91-11-12W-Circular	12W	Ø275x59	1250lm	0.76	12PCS
JAL91-11-18W-Circular	18W	Ø275x59	1780lm	0.76	12PCS
JAL91-11-25W-Circular	25W	Ø275x59	2450lm	0.76	12PCS
JAL91-14-25W-Circular	25W	Ø350x59	2450lm	1.19	6PCS
JAL91-14-30W-Circular	30W	Ø350x59	2850lm	1.19	6PCS
JAL91-11-12W-Semicircle	12W	Ø275x59	1250lm	0.77	12PCS
JAL91-11-18W-Semicircle	18W	Ø275x59	1780lm	0.77	12PCS
JAL91-10-12W-Square	12W	242x242x59	1250lm	0.72	12PCS
JAL91-10-18W-Square	18W	242x242x59	1780lm	0.72	12PCS
JAL91-12-12W-Oval	12W	320x230x60	1250lm	0.78	12PCS
JAL91-12-18W-Oval	18W	320x230x60	1780lm	0.78	12PCS
JAL91-12-25W-Oval	25W	320x230x60	2450lm	0.78	12PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black



JAL91E Bulkhead

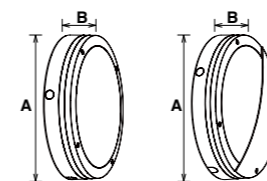

JAL91E LED ceiling light with modular design which adopts high lumen SMD LED, fire-rated material. It has a wide lighting area with down lighting and side lighting. IP65 and IK10 are suitable for outdoor application. Multiple functions: interchangeable CCT and power, adjustable sensor, emergency. And DALI/0-10V/Triac dimmable are available.

- 110° Beam Angle
- IP65 Protection
- DIM, DALI, 0-10V, SLIDE SWITCH, Wireless, Adjustable Power
- AC 200-240V, PF≥0.9, CRI≥80
- SAA, RoHS, CE, TÜV


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL91E-11-12W(Circular)	15W	Ø275x67	1150lm	0.92	12PCS
JAL91E-11-18W(Circular)	18W	Ø275x67	1650lm	0.92	12PCS
JAL91E-11-25W(Circular)	25W	Ø275x67	2250lm	0.92	12PCS
JAL91E-11-12W(Semicircle)	12W	Ø275x68	750lm	0.95	12PCS
JAL91E-11-18W(Semicircle)	18W	Ø275x68	1100lm	0.95	12PCS
JAL91E-11-25W(Semicircle)	25W	Ø275x68	1550lm	0.95	12PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black



JAL104 Bulkhead

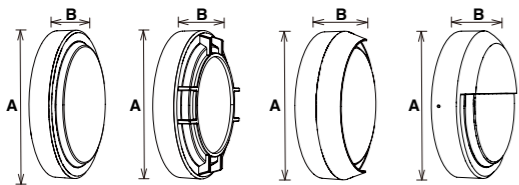


JAL104 is IP65 IK10 bulkhead which adopts Die-casting Aluminum body and 94-V0 fire-rated PC cover. This fixture is with four different trims and provides an alternative to color changeable, sensor and emergency functions. Dali and 0-10V dimming is also available.

- ▶ IK10 IP65 110° AC 200-240V
- ▶ DIM DALI 0-10V SLIDE SWITCH 3 in 1
- ▶ (())) Person Adjustable Power Smart Lighting
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ RoHS CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL104A-10-15W	15W	Ø250X63	1750lm	1.05	10PCS
JAL104B-10-15W	15W	Ø250X68	1500lm	1.15	10PCS
JAL104C-10-15W	15W	Ø250X83	1600lm	1.19	10PCS
JAL104D-10-15W	15W	Ø250X67	1100lm	1.38	10PCS
JAL104A-12-25W	25W	Ø300X63	3000lm	1.58	6PCS
JAL104B-12-25W	25W	Ø300X68	2150lm	1.69	6PCS
JAL104C-12-25W	25W	Ø300X83	2600lm	1.73	6PCS
JAL104D-12-25W	25W	Ø300X67	1900lm	2.05	6PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black

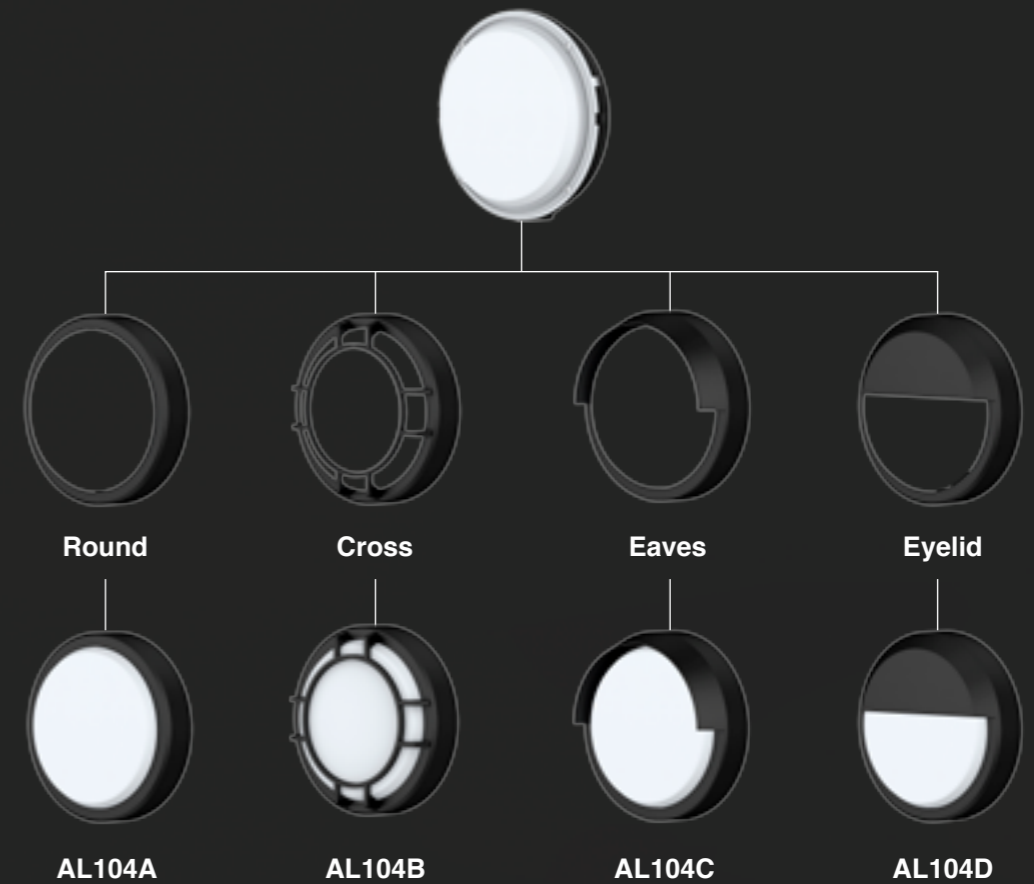

FOUR DIFFERENT TRIMS

