

JIBE LIGHTING — HEADQUARTERS
Hogebrinkerweg 14V - 3871 KN Hoevelaken
Netherlands Tel: +31 (0)33 844 7111
info@jibe.lighting - www.jibe.lighting



جيبايز


LED THERE BE LIGHT

JIBE LIGHTING — GERMANY
Marie-Curie-Ring 38- 63477 Maintal
Germany Tel: +49 (0)6181 90 90 509
Mob : +49 (0)162 26 36 614
fax : +49 (0)6181 61 01 618
s.fischer@jibe-lighting.de

JIBE LIGHTING — NORTH AMERICA
5917 NW 63 Way - Parkland FL 33067
USA Tel: 954-899-4040
todd.darling@jibeusa.lighting

© 2020 Jibe Lighting - all rights reserved
Jibe reserves the right to alter material, dimensions and characteristics without prior notice.
Read installation instructions carefully. Technical information on the installation instruction
has precedence over the information in the brochure.
Our general terms and conditions shall apply notwithstanding any stipulation to the contrary
to all the orders and agreements with Jibe.
You can obtain a copy of these conditions on demand.
For latest information and specifications of the full product range
visit www.jibe.lighting

LED LINEAR &
BATTEN LIGHT
SERIES

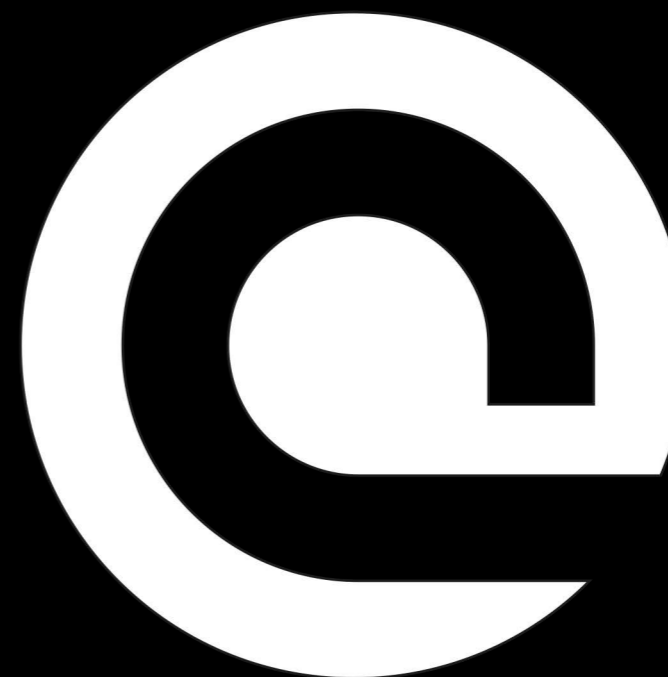


جيبايز




LED Linear Batten Light /Series/

LED batten series and linear light are more and more popular nowadays. The original design concept is to replace the LED tube. But LED batten is more decorative and elegant, while it also maintains high lumen efficiency. Jibe Lighting is committed to the design and development of LED battens for many years. Multiple functions are updated constantly: UGR<19, 100lm/W, 120lm/W, lighting up&down, as well as DALI or 0-10v dimmable system. Surface mounted, suspended and wall mounted are all available.

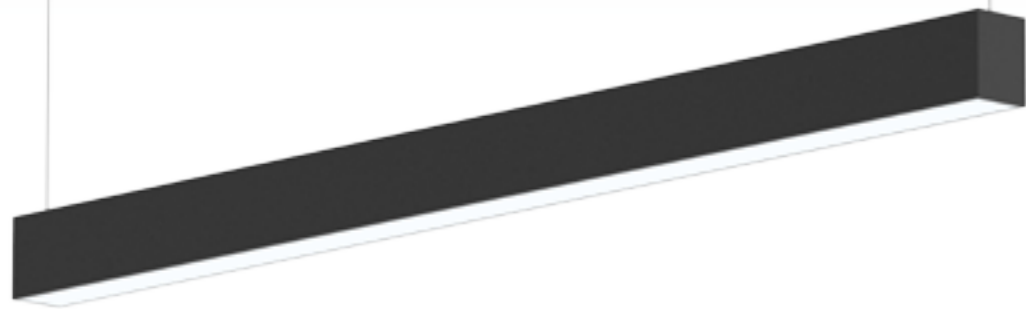

JDB66 Linear light




The JDB66A/B is a new linkable design light. Adopt high lumen efficiency SMD LED and aluminum materials. Pendant, surface mounted, wall mounted installation available. Up and down light effect of wall mounted and pendant installation. Interchangeable CCT, DALI/0-10V dimming for options. Tridonic DALI driver available.

- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB66A-1200-36W	36W	1204x56x75	4000lm	2.75	6PCS
JDB66A-1200-50W	50W	1204x56x75	5250lm	2.75	6PCS
JDB66A-1500-42W	42W	1504x56x75	4800lm	3.35	6PCS
JDB66A-1500-60W	60W	1504x56x75	6500lm	3.35	6PCS
JDB66B-1200-36W	36W	1204x56x75	3950lm	2.75	6PCS
JDB66B-1200-50W	50W	1204x56x75	5300lm	2.75	6PCS
JDB66B-1500-42W	42W	1504x56x75	4600lm	3.35	6PCS
JDB66B-1500-60W	60W	1504x56x75	6600lm	3.35	6PCS

CCT — 3000K 4000K 5000K 5700K


Finish — White Black

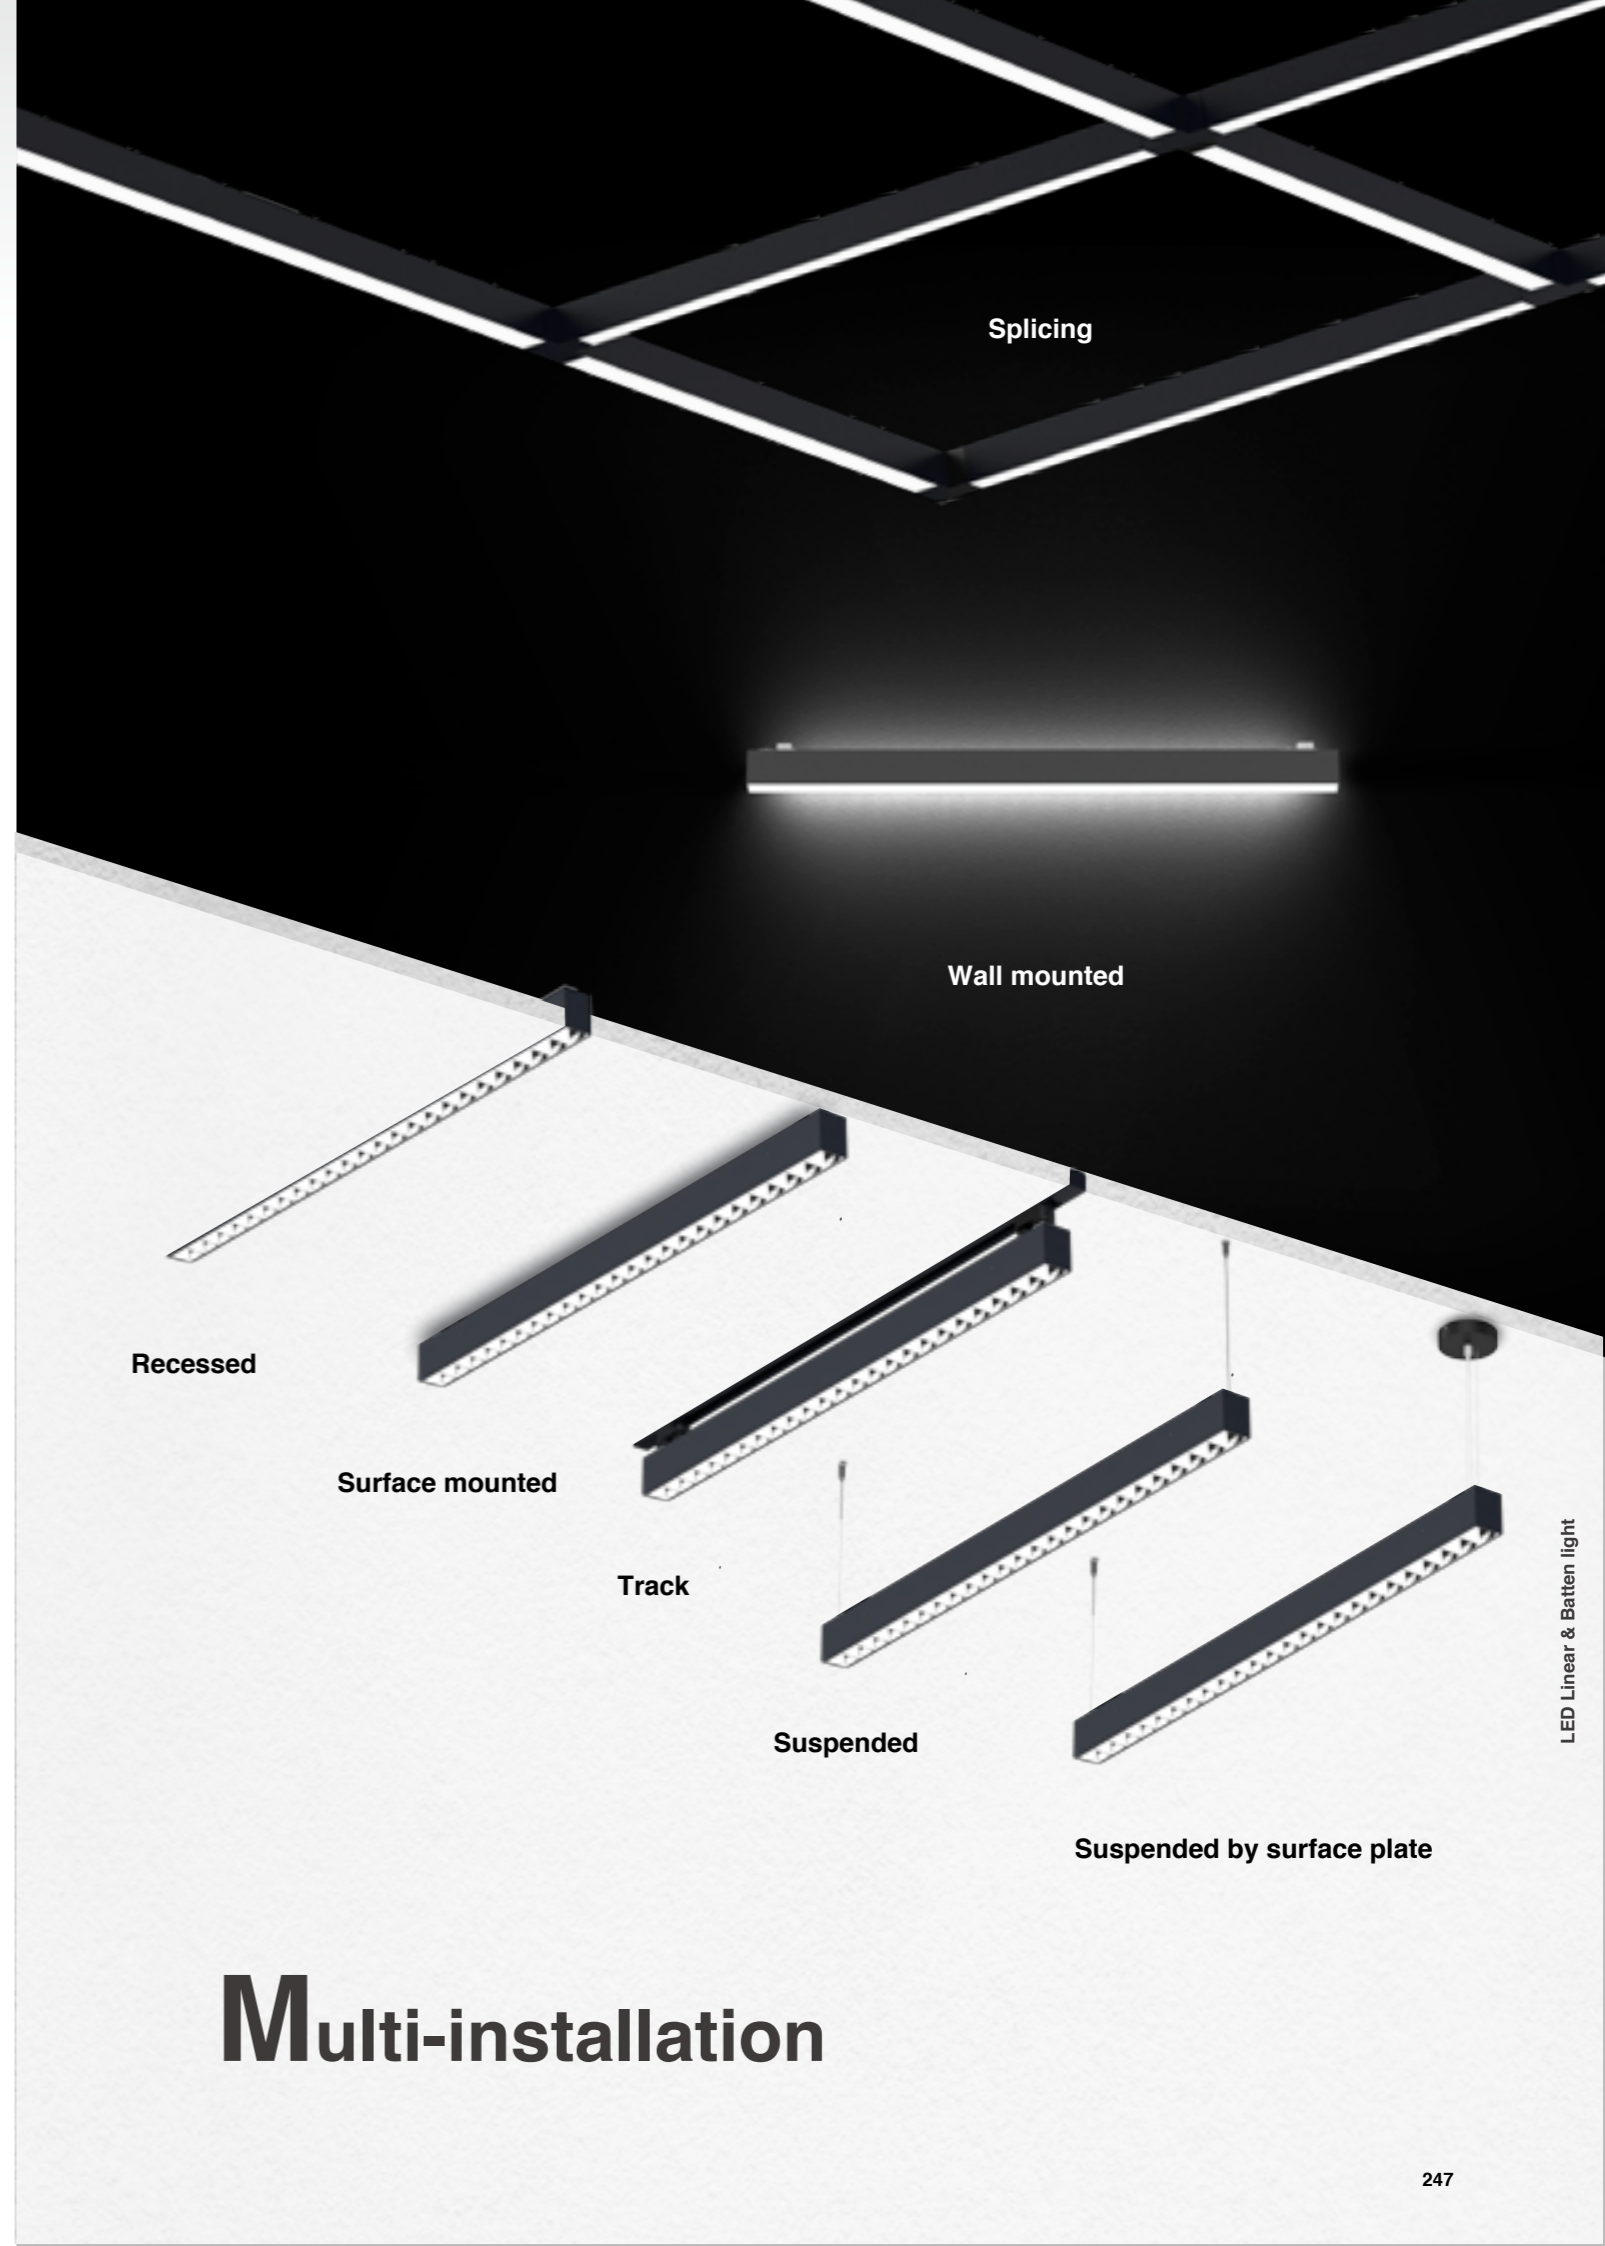

Multi-installation



JDB45 Linear light




Module changeable design LED batten JDB45 provides good heat dissipation, quality light and substantial energy saving. Suspended, surface mounted and splicing installation optional.

- ▶ 100° IP20
- ▶ SLIM SWITCH 3 in 1
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB45A-600-20W	20W	604x60x70	2500lm	1.15	21PCS
JDB45A-1200-40W	40W	1204x60x70	5200lm	2.20	20PCS
DB45B-600-20W	20W	604x60x70	2400lm	1.15	21PCS
JDB45B-1200-40W	40W	1204x60x70	4800lm	2.20	20PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black

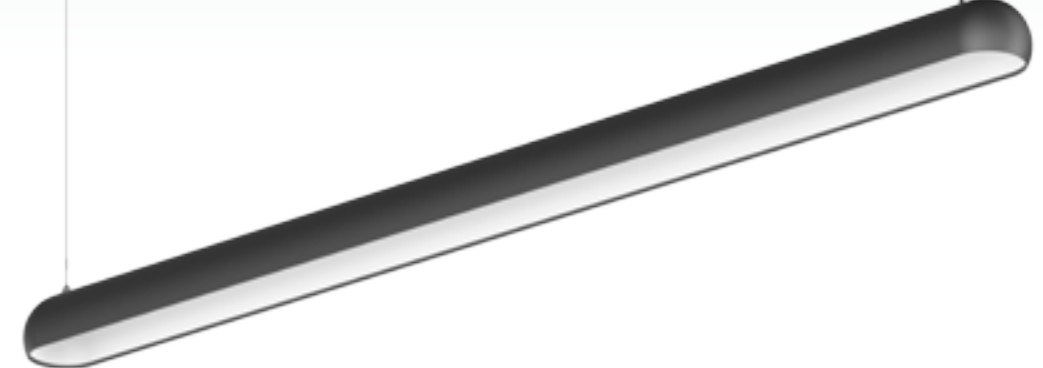

JDB60 Linear light




JDB60 is a double-side luminaire, with semicircle structure design. The combination of lens and reflector makes luminaire UGR < 19.

- ▶ 110°/60° IP20 UGR < 19
- ▶ AC 220-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB60-1200-40W	40W	1206x81x61	4800lm	2.30	6PCS
JDB60-1600-60W	60W	1652x81x61	7200lm	2.90	6PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black

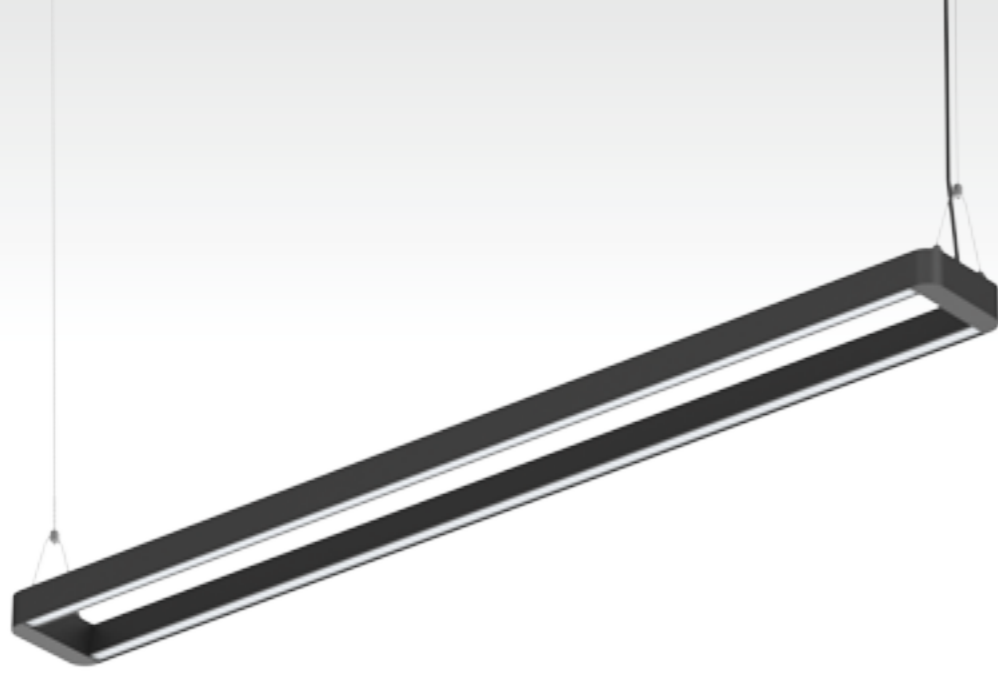

JDB59 Linear light



JDB59 linear light is a double-side luminaire with hollow design. Opal and grille modules are optional for both sides. The UGR<19 version provides comfortable lighting.

- ▶ 110° 60° 110° 60°
- ▶ IP20 UGR<19
- ▶ AC 220-240V PF≥0.9 CRI≥80
- ▶ RoHS CE




DB59A DB59B DB59C


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB59A-1200-30W	30W	1200x120x40	4200lm	2.40	5PCS
JDB59A-1500-40W	40W	1583x120x40	5600lm	2.80	5PCS
JDB59B-1200-30W	30W	1200x120x40	3200lm	2.40	5PCS
JDB59B-1500-40W	40W	1583x120x40	4200lm	2.80	5PCS
JDB59C-1200-40W	40W	1200x120x40	5000lm	2.40	5PCS
JDB59C-1500-60W	60W	1583x120x40	7000lm	2.80	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black

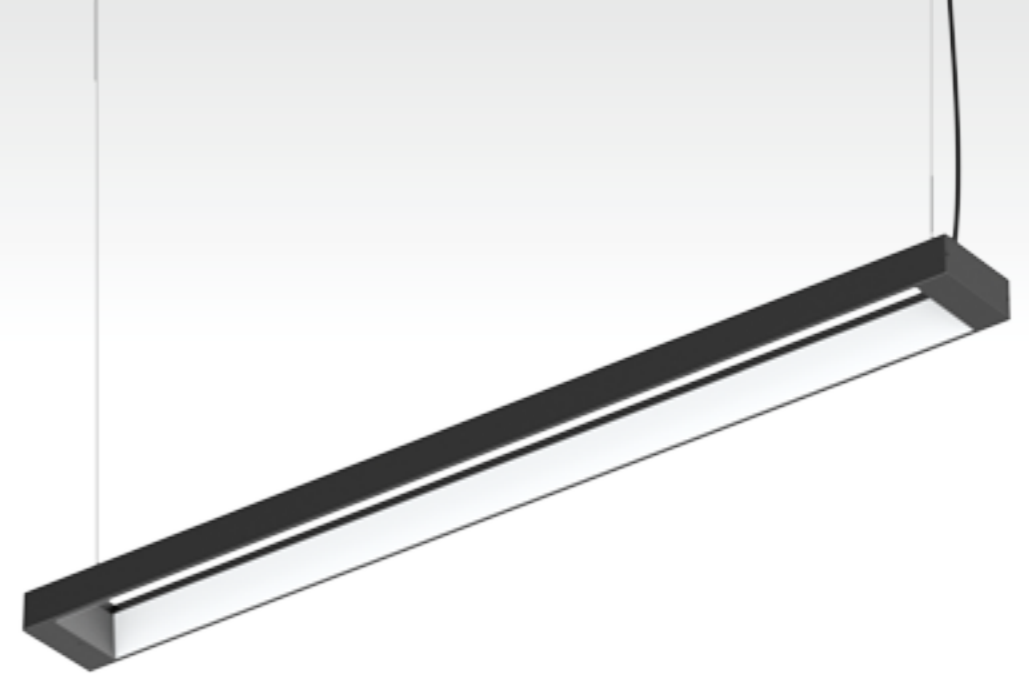

JDB25 Linear light



JDB25 Linear with suspended and hollow design highlight the brand features, which makes the light go both up and down sides. The light for upside can reduce the extra light decoration.

- ▶ 120° IP20
- ▶ SIDE SWITCH 3 in 1
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB25-900-20W	20W	922x115x48.8	2000lm	1.46	6PCS
JDB25-1200-40W	40W	1222x115x48.8	3800lm	1.86	6PCS
JDB25-1600-60W	60W	1622x115x48.8	5800lm	2.47	6PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black



JDB106 Batten



JDB106 is an extra wide-body LED batten featuring an aesthetically pleasing low-glare design that minimises ceiling clutter for offices, retail and schools applications. Multi-functions as emergency and sensor available. It can be only for surface mounted installation.

- ▶ 120° IP40
- ▶ DIM DALI
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ SAA CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB106-1200-25W	25W	1200x210x70	2900lm	3.80	4PCS
JDB106-1200-30W	30W	1200x210x70	3500lm	3.80	4PCS
JDB106-1200-40W	40W	1200x210x70	4600lm	3.80	4PCS
JDB106-1500-40W	40W	1500x210x70	4850lm	4.70	4PCS
JDB106-1500-50W	50W	1500x210x70	6000lm	4.70	4PCS
JDB106-1500-58W	58W	1500x210x70	7000lm	4.70	4PCS


CCT — 3000K — 4000K — 5000K

Finish — White





JTRP06 Linear light




JTRP06 adopts high lumen SMD chip, the high transmittance PC cover makes a uniform and soft light output. With waterproof joint at both ends, it can be linkable. Special clip-on bracket design makes an easier installation. The installation angle is adjustable with different scales.

- ▶ IP69K IP66
- ▶ DALI 0-10V
- ▶ AC 220-240V PF ≥ 0.9 CRI ≥ 80
- ▶ CE


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JTRP06A-600-20W	20W	Ø75.2x600	2350lm	0.96	6PCS
JTRP06B-600-20W	20W	Ø75.2x600	2350lm	0.96	6PCS
JTRP06A-1200-33W	33W	Ø75.2x1200	4150lm	1.65	6PCS
JTRP06B-1200-33W	33W	Ø75.2x1200	4150lm	1.65	6PCS
JTRP06A-1500-45W	45W	Ø75.2x1500	5500lm	2.00	6PCS
JTRP06B-1500-45W	45W	Ø75.2x1500	5500lm	2.00	6PCS

CCT 3000K 4000K 5000K 5700K

Finish White

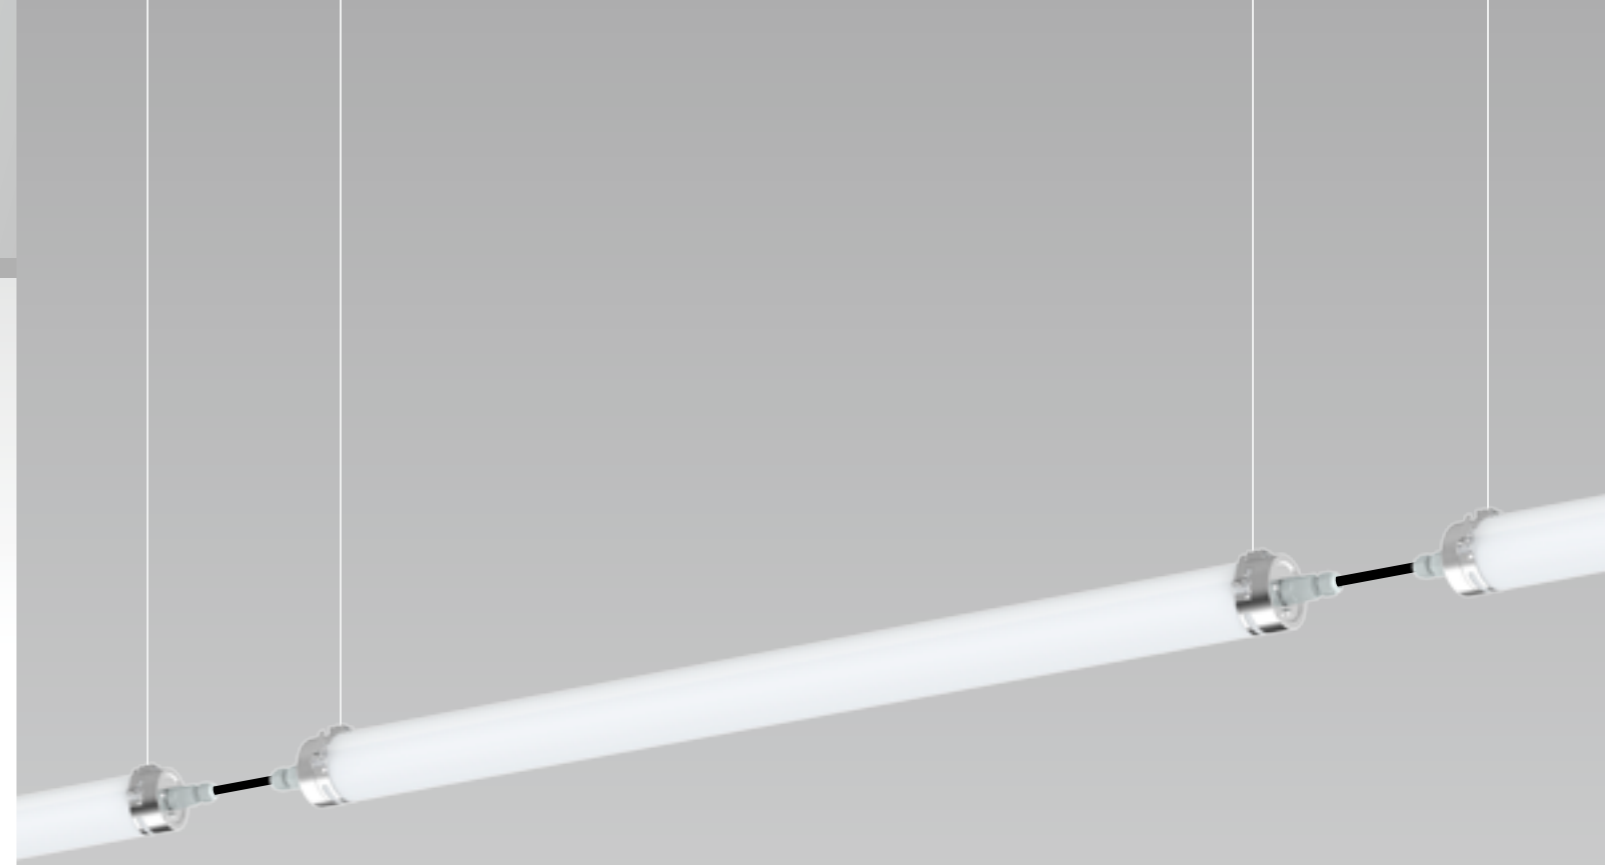


IP69K TUBULAR Tri-proof batten



ART-NR	20W	33W	45W
Linkable suggested luminaries Qty	52	42	35



JDB76 Batten



The iron lamp body provides excellent heat dissipation. It is made of high lumen 2835 SMD led chips, energy saving, instant start. New plastic snap-on button design for easy installation.


- ▶ 120° IP20
- ▶ SLIDE SWITCH 3m PIR Sensor Smart Lighting
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB76-600-20W	20W	603X71X64	2200lm	7.8	12PCS
JDB76-1200-40W	40W	1203X71X64	4600lm	15.4	12PCS
JDB76-1500-50W	50W	1503X71X64	6000lm	18.7	12PCS
JDB76-1500-58W	58W	1503X71X64	6500lm	18.7	12PCS
JDB76-1800-58W	50W	1803X71X64	7000lm	13.2	6PCS
JDB76-1800-72W	72W	1803X71X64	8350lm	13.2	6PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black

JDB08 Batten



The design of JDB08 batten realizes low cost, simple construction and superior capability, milky PC diffuser achieves anti-glare and high light transmittance. It is a high efficient and low cost product with quite large potential market.

- ▶ 120° IP20
- ▶ Smart Lighting PIR Sensor
- ▶ AC 100-277V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB08-600-20W	20W	625X58.5X58.5	2060lm	0.78	10PCS
JDB08-1200-40W	40W	1225X58.5X58.5	3960lm	1.50	10PCS
JDB08-1500-45W	45W	1525X58.5X58.5	4860lm	1.90	6PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black



JDB41 Batten



JDB41 batten lamp adopts separated module design, has been improved to have a wider lighting emitting area; color temperature and wattage both switchable. Suspended, surface mounted and splicing installation optional.


- ▶ 120° IP20
- ▶ SLIDE SWITCH 3 in 1 Adjustable Power
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB41-600-25W	25W	600x124x68	2500lm	1.50	12PCS
JDB41-1200-42W	42W	1200x124x68	4780lm	2.90	6PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black

JDB61 Batten



JDB61 is a modular design led batten light with narrow and wide base version for option. Even lighting with high lighting efficiency 120~130lm/w. Seamless line connection, ideally product for different applications. It offers multiple functions such as CCT changeable and wattage switchable. Metal base with perfect heating dissipation to ensure the longer lifespan.

- ▶ 120° IP20
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB61A-600-20W	20W	630X150X58.5	2550lm	1.42	5PCS
JDB61-600-20W	20W	630X230X58.5	2550lm	1.70	5PCS
JDB61A-1200-40W	40W	1250X150X58.5	5012lm	2.70	5PCS
JDB61-1200-40W	40W	1250X230X58.5	5012lm	3.20	5PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black



JDB49 Batten



Full size slim batten JDB49 featuring uniform light and excellent heat dissipation, CCT changeable by adjusting the slide switch. Easier installation without installing bracket.

- ▶ 120°
- ▶ IP20
- ▶ SLIDE SWITCH
- ▶ AC 200-240V
- ▶ PF ≥ 0.9
- ▶ CRI ≥ 80
- ▶ SAA
- ▶ RoHS
- ▶ CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB49A-600-20W	20W	600X80X34	2300lm	0.60	10PCS
JDB49A-900-30W	30W	900X80X34	3400lm	0.86	10PCS
JDB49A-1200-35W	35W	1200X80X34	3900lm	1.12	10PCS
JDB49A-1500-40W	40W	1500X80X34	4300lm	1.40	6PCS
JDB49B-600-25W	25W	600X124X42	2800lm	0.84	10PCS
JDB49B-900-35W	35W	900X124X42	4100lm	1.25	10PCS
JDB49B-1200-45W	45W	1200X124X42	5500lm	1.67	10PCS
JDB49B-1500-50W	50W	1500X124X42	5500lm	2.00	6PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black



JAL17/-F Batten



Jibe Lighting IP65 weatherproof batten which available in 21W & 42W with size of 600mm and 1200mm. Featuring high grade polycarbonate diffuser and housing, they are suitable for commercial and industrial use where moisture or dust is prevalent.

- ▶ 110°
- ▶ IP65
- ▶ IP20
- ▶ AC 100-240V
- ▶ AC 100-277V
- ▶ PF ≥ 0.9
- ▶ CRI ≥ 80
- ▶ SAA
- ▶ RoHS
- ▶ CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JAL17-600-21W	21W	600x75x24	1950lm	0.35	25PCS
JAL17-900-32W	32W	900x75x24	2850lm	0.51	25PCS
JAL17-1210-42W	42W	1210x75x24	3820lm	0.67	20PCS
JAL17F-600-21W	21W	600x78x28	1760lm	0.45	25PCS
JAL17F-1210-42W	42W	1210x78x28	3570lm	0.75	25PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black



JDB05 Batten

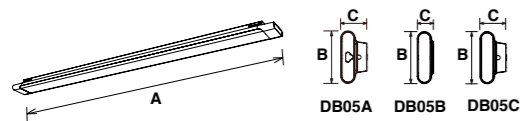

Elegant design, low cost, super slim construction and superior capability, aluminum profile body for good thermal dissipate. Easy installation provided with surface mounted and suspended.

- ▶ 120°
- ▶ IP20
- ▶ DIM
- ▶ AC 100-240V
- ▶ AC 200-240V
- ▶ PF ≥ 0.9
- ▶ CRI ≥ 80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB05A/C-600-20W	20W	600X90X46	1710lm	0.86	12PCS
JDB05A/C-900-30W	30W	900X90X46	2630lm	1.30	12PCS
JDB05A/C-1200-40W	40W	1200X90X46	3540lm	1.98	12PCS
JDB05B-600-20W	20W	600X90X28	1710lm	0.82	20PCS
JDB05B-900-30W	30W	900X90X28	2630lm	0.95	12PCS
JDB05B-1200-40W	40W	1200X90X28	3540lm	1.50	12PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black



JDB15B Batten



JDB15B suspending led batten light designed with 270° wide beam angle. Distribute 60% lumens downwards to satisfying the basic requirement for activities and 40% lumens upwards to creating a brilliant lighting atmosphere.
Code Watt Size (AxBxCmm)

- ▶ 110°
- ▶ IP20
- ▶ DIM
- ▶ AC 200-240V
- ▶ PF ≥ 0.9
- ▶ CRI ≥ 80
- ▶ RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JDB15B-600-20W	20W	600x148x17	1400lm	1.60	6PCS
JDB15B-900-30W	30W	900x148x17	2250lm	1.90	6PCS
JDB15B-1200-45W	45W	1200x148x17	2790lm	2.30	6PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White Black



JAL06 Batten

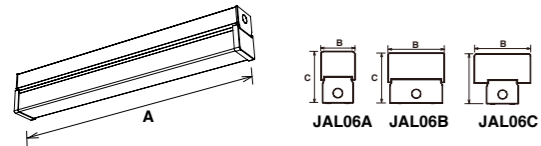

AA12 prismatic diffuser for visual comfort. Cover plate held securely by threaded nut for fast installation. High quality white epoxy powder coated finish. New plastic snap-on end caps for easy installation of diffuser.

- ▶ IP20
- ▶ AC 100-277V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JB-JAL06-9W-A	9W	624X69X105	800lm	1.20	12PCS
JB-JAL06-18W-A	18W	1232X69X105	1630lm	2.40	8PCS
JB-JAL06-25W-A	25W	1535X69X105	2120lm	3.00	6PCS
JB-JAL06-18W-B/C	18W	624X120X108	1630lm	1.80	8PCS
JB-JAL06-36W-B/C	36W	1232X120X108	3250lm	3.60	4PCS
JB-JAL06-50W-B/C	50W	1535X120X108	4300lm	4.50	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black



JTRP03 Batten



Traditional tube replacement JTRP03 with high transparency, soft&uniform light distribution; latch design make the lampshade dis-assembly and assembly easier. Dust-proof waterproof rating as IP65. Anti-corrosion, shock resistance, easy cleaning, energy saving and environmental protection. Brand Tridonic driver available.

- ▶ IP65
- ▶ AC 220-240V PF ≥ 0.9 CRI ≥ 80
- ▶ RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JTRP03-600-10W Single	10W	660x90x90	100/130 LM/W	0.90	12PCS
JTRP03-600-19W/E Twin	19W	664x140x90	100/130 LM/W	1.16/1.35	9PCS
JTRP03-1200-19W Single	19W	1274x90x90	100/130 LM/W	1.62	9PCS
JTRP03-1200-38W/E Twin	38W	1274x140x90	100/130 LM/W	2.26/2.60	6PCS
JTRP03-1500-38W Single	38W	1574x90x90	100/130 LM/W	1.96	9PCS
JTRP03-1500-57W/E Twin	57W	1574x140x90	100/130 LM/W	2.65/3.15	6PCS
JTRP03-1800-38W Single	38W	1837x90x90	100/130 LM/W	2.29	6PCS
JTRP03-1800-75W/E Twin	75W	1837x140x90	100/130 LM/W	3.09/3.95	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White