

JIBE LIGHTING — HEADQUARTERS
Hogebrinkerweg 14V - 3871 KN Hoevelaken
Netherlands Tel: +31 (0)33 844 7111
info@jibe.lighting - www.jibe.lighting



jibe


LED THERE BE LIGHT

JIBE LIGHTING — GERMANY
Marie-Curie-Ring 38- 63477 Maintal
Germany Tel: +49 (0)6181 90 90 509
Mob : +49 (0)162 26 36 614
fax : +49 (0)6181 61 01 618
s.fischer@jibe-lighting.de

JIBE LIGHTING — NORTH AMERICA
5917 NW 63 Way - Parkland FL 33067
USA Tel: 954-899-4040
todd.darling@jibeusa.lighting

© 2020 Jibe Lighting - all rights reserved
Jibe reserves the right to alter material, dimensions and characteristics without prior notice.
Read installation instructions carefully. Technical information on the installation instruction
has precedence over the information in the brochure.
Our general terms and conditions shall apply notwithstanding any stipulation to the contrary
to all the orders and agreements with Jibe.
You can obtain a copy of these conditions on demand.
For latest information and specifications of the full product range
visit www.jibe.lighting

LED WALL &
SPIKE LIGHT
SERIES

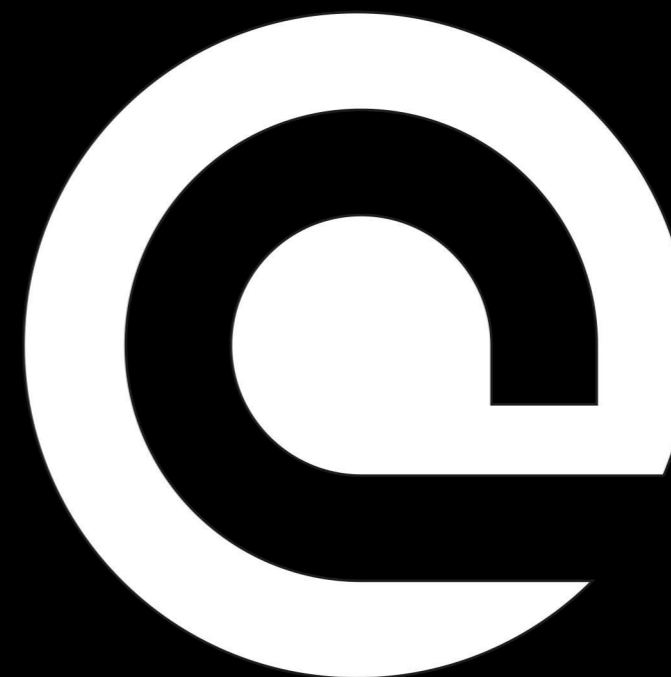


jibe




LED Wall & Spike Light /Series/

Jibe Lighting has been developing a series of wall lights and spike lights in recent years. More and more fashionable and brilliant products are self-designed. Equipped with new sensor function, up and down lighting, beam angle adjustable version, and IP65 waterproof, Jibe Lighting led wall light family provide various solutions for project and distribution. All wall lights can be used for both indoor corridors and outdoor courtyard. Jibe Lighting has received much favor and love from our customers.

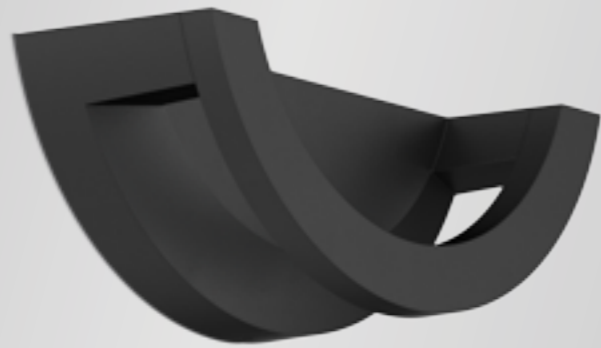

JWL46 Wall light



JWL46 LED wall light wins 2020 IF Award, adopting high lumen SMD, aluminum body with great thermal management. It is IP65 IK08 high protection. Indirect lighting design offers a great visual experience. Various DIY shape is available.

- ▶ 50°
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL46-10W	10W	204x81x78	530lm	0.50	24PCS

CCT ——— 3000K 4000K 5000K 5700K

Finish ——— Black




Indirect lighting like
RAINBOW


DIY shape installation



JWL57 Wall light



JWL57 wall light is with adjustable head 240 degree (30 degree clockwise, 210 degree counterclockwise). ADC12 aluminum housing provides an excellent thermal management. IP65 and IK10 rating for outdoor lighting. A type frosted tempered glass and B type clear tempered glass.

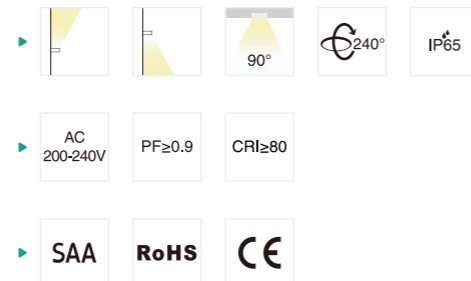


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL57A-10W	10W	203x108x80	1050lm	0.85	12PCS
JWL57B-10W	10W	203x108x80	1200lm	0.85	12PCS
JWL57A-18W	18W	203x108x80	1800lm	0.85	12PCS
JWL57B-18W	18W	203x108x80	2000lm	0.85	12PCS

CCT 3000K 4000K 5000K 5700K


Finish White Black



JWL28 Wall light





JWL28 as one of the wall light UP and DOWN in Jibe Lighting, which is IP65 and IK08 with AL6063 aluminum and UV resistance for outdoor application, the wide voltage 100~240V could be used in all of the world. Meanwell, the isolated driver and high light efficiency wins lots of good feedback from market.

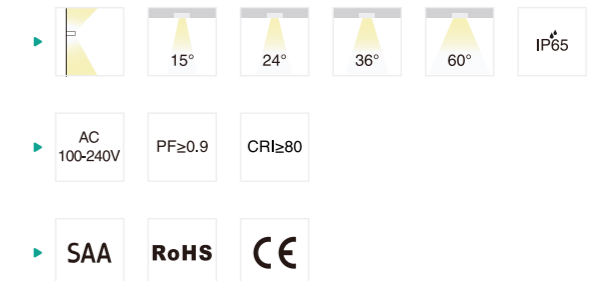


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL28-10W	10W	170x60x105	900lm	0.60	18PCS
JWL28-20W	20W	200x76x121	2200lm	0.90	18PCS
JWL28-27W	27W	230x100x145	3200lm	1.20	12PCS

CCT 2700K 3000K 4000K 5000K

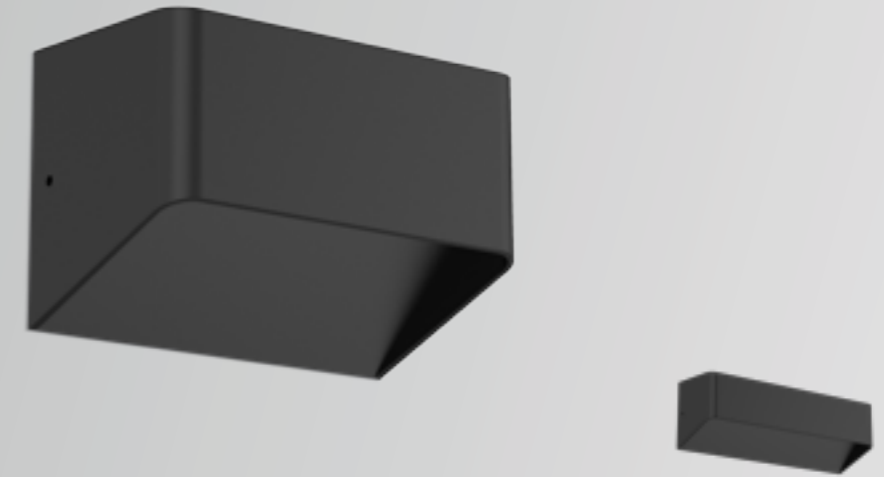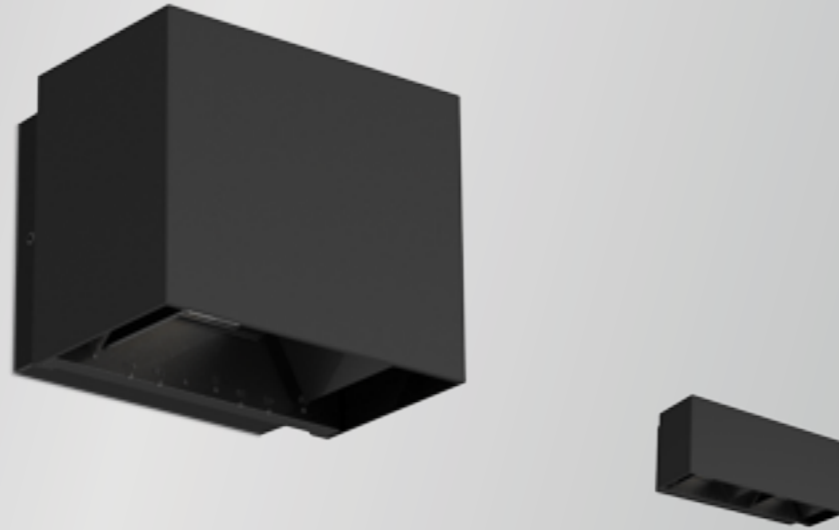







Finish White Black Silver



JWL20 Wall light





This Classical IP65 WALL light JWL20 with beam angle changeable directly from aluminum plate , which meets different demand from users and satisfy various lighting effects . The simple and decent design in up and down which reached excellent thermal management.


- ▶  15°~120°
15°~120°
- ▶  IP65
- ▶  AC 200-240V
- ▶  PF≥0.9
- ▶  CRI≥80
- ▶  SAA
- ▶  RoHS
- ▶  CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL20-10W	10W	120x96.8x100	900lm	0.59	18PCS
JWL20-18W	18W	242x97.7x100	1350lm	1.10	12PCS









CCT — 3000K 4000K 5000K 5700K

Finish —  White  Black

JWL16 Wall light






JWL16 IP54 WALL light adopts traditional design to satisfy public aesthetic view , the up and down design meet classic demand and distributes perfect lighting effects . IP54 and IK08 with fire-rated 94-V0 PC make your life more comfortable.

- ▶  100°
100°
- ▶  IP54
- ▶  AC 220-240V
- ▶  PF≥0.9
- ▶  CRI≥80
- ▶  SAA
- ▶  RoHS
- ▶  CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL16-1510-10W	10W	150x92x100	500lm	0.54	24PCS
JWL16-3010-18W	18W	300x92x100	900lm	1.05	12PCS

CCT — 3000K 4000K 5000K 5700K

Finish —  White  Black

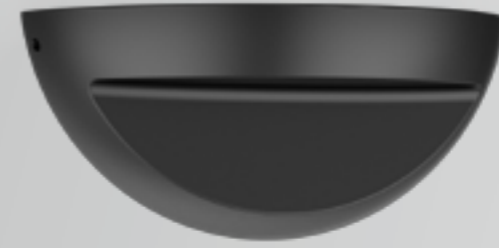

JWL06A Wall light



SMD led design JWL06A led wall light impresses with its unique design as well as the tactile appeal. Smiley-face design on the wall makes everyone feel warm and cozy, IP54 for indoor and outdoor use, die-casting aluminum ADC12 with very good heat dissipation and UL94-V0 fire rated milky PC material with even and soft light output.


- ▶ 120°
- ▶ AC 100-277V PF≥0.9 CRI≥80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL06A-12W	12W	159x65.5	1050lm	0.35	36PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black

JWL06B Wall light




COB led design JWL06A led wall light impresses with its unique design as well as the tactile appeal. Smiley-face design on the wall makes everyone feel warm and cozy, IP54 for indoor and outdoor use, die-casting aluminum ADC12 with very good heat dissipation and UL94-V0 fire rated milky PC material with even and soft light output.

- ▶ 60°
- ▶ AC 100-277V PF≥0.9 CRI≥80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL06B-12W	12W	158x70x66.5	1100lm	0.30	36PCS

CCT 3000K 4000K 5000K 5700K


Finish White Black

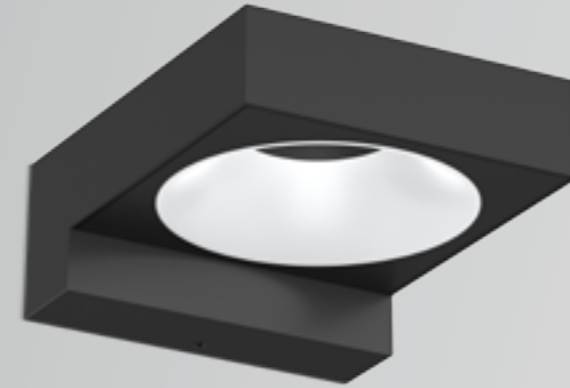

JWL07 Wall light



JWL07B LED wall light provides a stylish architectural luminaire for interior applications by the unique form and up light and down light functional design. JWL07B adopts aluminum housing which provides excellent thermal management and 94-V0 fire rated PC which distributes softly lighting to creating comfortable atmosphere.




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL07-8W	8W	170x140x59	655lm	0.50	24PCS


CCT — 3000K 4000K 5000K 5700K

Finish — White Black

JWL08 Wall light



JWL08 LED Wall light is up and down design with internal driver, adopts aluminum housing provides excellent thermal dissipation, the 94-V0 fire rated PC distributes soft and unique light, IP65 suitable for both indoor and outdoor use.




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL08-8W	8W	139x115x52	670lm	0.42	24PCS

CCT — 3000K 4000K 5000K 5700K


Finish — White Black



JWL59 Wall light

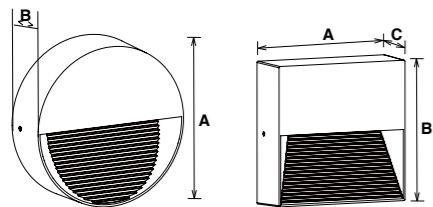


JWL59 is an IP65 surface mounted wall light, the shell is made of high-strength aluminum alloy and making the protection level reach IK08 and UV resistant, the appearance of this series product is designed in a minimalist style. Simple square and circular lines combined with indirection LED light source can create a beautiful and soft lighting environment. The wall light can be used both in indoor and outdoor installation environments.

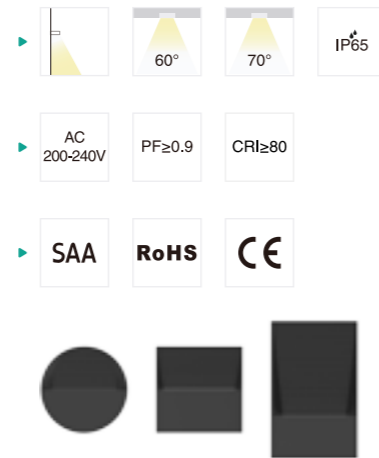


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL59A-5W	5W	Ø114x40	220lm	0.33	36PCS
JWL59A-8W	8W	Ø180x37	500lm	0.62	24PCS
JWL59B-5W	5W	114x114x40	220lm	0.39	36PCS
JWL59B-8W	8W	180x180x40	400lm	0.74	24PCS
JWL59C-5W	5W	114x180x35	220lm	0.53	12PCS
JWL59C-10W	10W	114x250x35	220lm	0.75	12PCS

CCT 3000K 4000K 5000K 5700K


Finish White Black

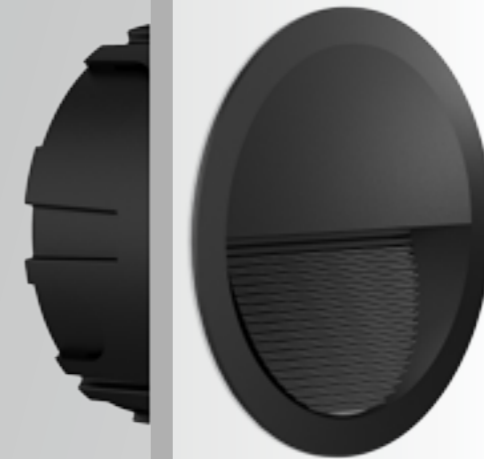

JWL60

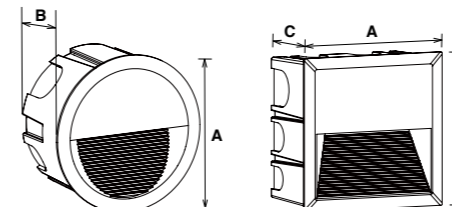

JWL60 is an IP65 recessed wall light, the shell is made of high-strength aluminum alloy and making the protection level reach IK08 and UV resistant, the appearance of this series product is designed in a minimalist style. Simple square and circular lines combined with indirection LED light source can create a beautiful and soft lighting environment. The wall light can be used both in indoor and outdoor installation environments.

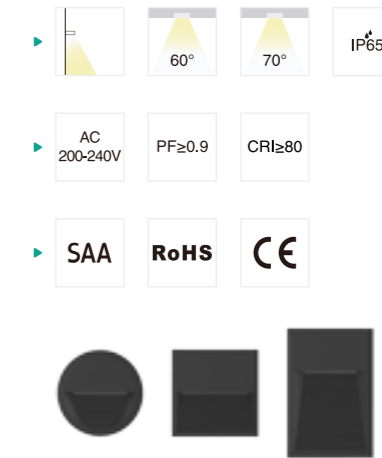


Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL60A-5W	5W	Ø135x78	Ø130X78	220lm	0.38	18PCS
JWL60A-8W	8W	Ø202x78	Ø196X78	400lm	0.71	6PCS
JWL60B-5W	5W	136x136x78	130X130X78	220lm	0.45	18PCS
JWL60B-8W	8W	201x201x78	195X195X78	400lm	0.85	6PCS
JWL60C-5W	5W	136x202x78	130X196X78	220lm	0.61	12PCS
JWL60C-10W	10W	271x135x78	130X266X78	500lm	0.86	12PCS

CCT 3000K 4000K 5000K 5700K

Finish White Black



WL02 Step light



WL02 slim step light is with internal driver design, adopts aluminum housing provides excellent thermal dissipation, the reflector and tempered glass distributes uniform light which creates comfortable visual experience, IP54 suitable for indoor and semi-outdoor use.

- ▶ 60°
- ▶ IP54
- ▶ AC 100-240V
- ▶ PF≥0.5
- ▶ CRI≥80
- ▶ SAA
- ▶ RoHS
- ▶ CE




Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
WL02-7070-3W	3W	70x70x24	60x60	220lm	0.22	50PCS
WL02-11070-3W	3W	110x70x27	100x60	220lm	0.30	40PCS
WL02-20070-3W	3W	200x70x32	190x60	220lm	0.45	24PCS
WL02-200135-8W	8W	200x135x32	190x125	580lm	0.66	24PCS

CCT 3000K 4000K 5000K 5700K

Finish White



WL62 Wall light



WL62 is an IP44 wall light with PIR sensor, it adopt high lumen COB light source and ADC12 aluminum. The lamp has a high lumen efficiency and great heat dissipation. Wall mounted and ceiling mounted options. It's a great choice for outdoor walkways, garage areas, back door entrances etc.

- ▶ 90°
- ▶ IP44
- ▶ PIR Sensor
- ▶ AC 200-240V
- ▶ PF≥0.5
- ▶ CRI≥80
- ▶ RoHS
- ▶ CE




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
WL62-11W	11W	Ø76x96xØ121	1250lm	0.48	24PCS
WL62-12W-S	12W	Ø76x96xØ121	1250lm	0.58	24PCS
WL62-23W	23W	Ø76x96xØ121	2350lm	0.75	12PCS
WL62-24W-S	24W	Ø76x96xØ121	2350lm	0.85	12PCS

CCT 2700K 3000K 4000K 5000K

Finish White Black



JWL01 Wall light



JWL01 is a traditional Wall light with internal driver, the lighting direction can be adjusted accordingly, single head and multi-heads are both available. Sensor function optional, IP65(IP54 for sensor function) suitable for a variety applications.

- ▶ 90°
- ▶ IP65 IP54
- ▶ PIR Sensor
- ▶ AC 100-240V PF≥0.8 CRI≥80
- ▶ SAA RoHS CE TÜV


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL01-8W	8W	Ø76xØ133	760lm	0.70	12PCS
JWL01-13W	13W	Ø76xØ133	1145lm	0.58	12PCS
JWL01-16W	16W	Ø76xØ133	1520lm	0.94	12PCS
JWL01-26W	26W	Ø76xØ133	2240lm	0.94	12PCS

CCT — 3000K 4000K 5000K 5700K

Finish — Black



JWL11 Wall light



IP65 JWL11 LED Wall light is available for PIR sensor adjusting the lux and duration time, a great choice for outdoor walkways, garage areas, and back door entrances etc. It allows one head & two heads; the ADC12 heat sink makes the excellent heat dissipation; internal isolated driver ensures the safety and saves the space. Both wall mounted and ceiling mounted are optional, easy to install.

- ▶ 36° 60°
- ▶ IP65
- ▶ PIR Sensor
- ▶ AC 220-240V PF≥0.9 CRI≥80
- ▶ RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JWL11-8W	8W	Ø60.5x87xØ100	800lm	0.45	18PCS
JWL11-16W	16W	Ø60.5x87xØ100	1600lm	0.72	18PCS

CCT — 3000K 4000K 5000K 5700K

Finish — Black



JML06 Spike light



JML06 LED Spike light adopts aluminum body and plastic spike for damp conditions. The AC/DC12V input provides more safety guarantee. IP65 for outdoor use, it applies to landscaping embellishment lighting for residence and community and all kind of parks.

- ▶ 60°
- ▶ AC/DC 12V PF≥1.0 CRI≥80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JML06-6W	6W	Ø72x243x97	360lm	0.24	50PCS

CCT — 3000K 4000K 5000K 5700K

Finish — Black



JML07 Spike light



JML07 LED Spike light adopts integrated COB light source of fashion design, equipped with high lumen, high CRI, low temperature and long lifespan. Built-in driver, the AC/DC12V input provides more safety guarantee. IP65 for outdoor use, it applies to landscaping embellishment lighting for residence and community and all kind of parks.

- ▶ 36° 60°
- ▶ AC/DC 12V PF≥1.0 CRI≥80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JML07-6W	6W	Ø76x262x57.5	550lm	0.31	50PCS
JML07-10W	10W	Ø76x262x57.5	950lm	0.31	50PCS

CCT — 3000K 4000K 5000K 5700K


Finish — Black



Asymmetric light distribution



JNL08 Garden light




- ▶ 50° IP65
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ RoHS CE

JNL08 LED garden light wins 2020 IF Award, adopting high lumen SMD, aluminum body with great thermal management. It is IP65 IK08 high protection. Indirect lighting design offers a great visual experience. Special shape design provides charming light spot. Size 500mm and 1000mm for options.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JNL08A-10W	10W	249x121x500	530lm	2.34	6PCS
JNL08B-10W	10W	249x121x1000	530lm	4.03	2PCS


CCT ——— 3000K 4000K 5000K 5700K

Finish ——— Black

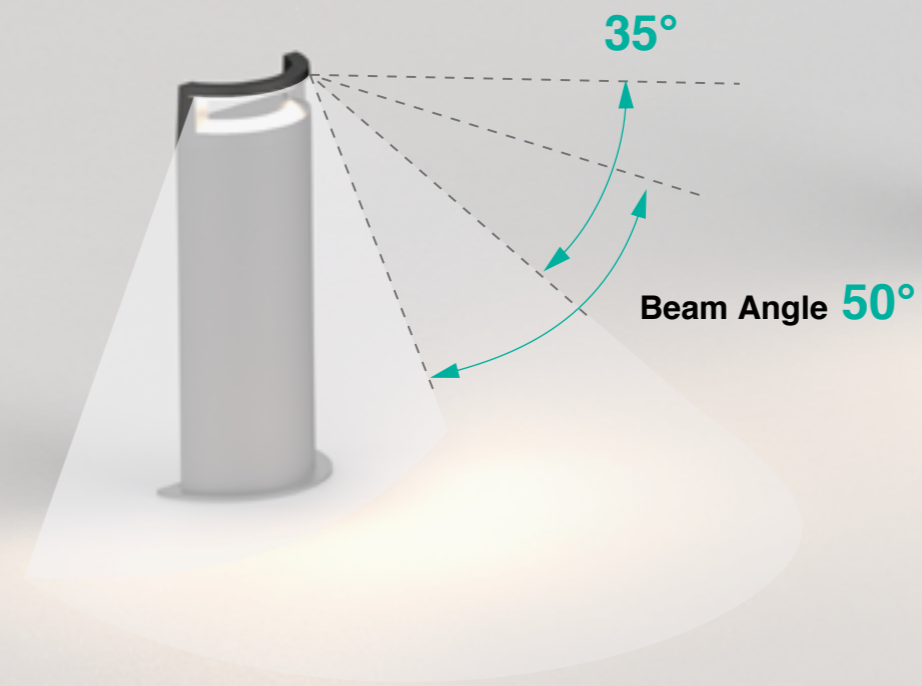




JML08 Garden light



JML08 LED garden light is a stylish architectural luminaire with double-sided light design. Aluminum material provides excellent thermal management. IP65 waterproof is suitable for outside garden. The holder length is optional among 300mm, 500mm, 700mm, and 1000mm.

- ▶  120°
- ▶  IP65
- ▶  AC 100-240V
- ▶  PF ≥ 0.9
- ▶  CRI ≥ 80
- ▶  RoHS
- ▶  CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JML08-300-8W	8W	300x208xØ140	655lm	1.30	6PCS
JML08-500-8W	8W	500x208xØ140	655lm	1.72	6PCS
JML08-700-8W	8W	700x208xØ140	655lm	2.15	6PCS
JML08-1000-8W	8W	1000x208xØ140	655lm	2.62	6PCS

CCT — 3000K — 4000K — 5000K — 5700K


Finish —  Black






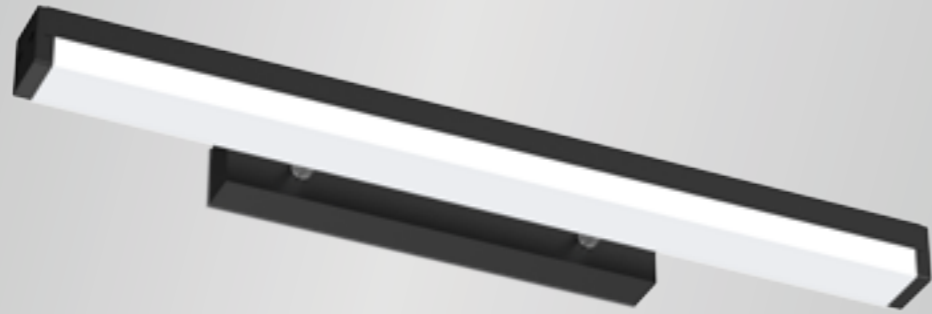



LED Wall & Spike light



JML18 Mirror light





JML18 is a super design mirror light, it adopts high transmittance PC lampshade and JAL6063 aluminum lamp body. High lumen SMD LED with 110lm/W light effect, be available of interchangeable CCT by slide switch. It's elegant design, perfect details to create a sense of stylish. Widely be used in Hotel, Shopping mall, home, restaurant, etc.

- ▶  120°  IP40
- ▶  SLIDE SWITCH
- ▶ AC 100-240V  PF≥0.9  CRI≥80
- ▶ SAA  RoHS  CE


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JML18-580-10W	10W	580x50x111	1180lm	0.74	12PCS
JML18-860-15W	15W	860x50x111	1950lm	0.96	12PCS
JML18-1140-20W	20W	1140x50x111	2430lm	1.18	12PCS

CCT — 3000K 4000K 5000K 5700K








Finish —  White  Black



JML01 Mirror light



JML01 mirror light with concise and elegant design, adopting high transmittance PC lampshade, JAL6063 aluminum lamp body, high lumen SMD LED with 110lm/W. Interchangeable CCT by slide switch is available, Brush Nickel/Chrome plated/Matt Black multiple finish color for option.

- ▶  120°  IP40
- ▶  SLIDE SWITCH
- ▶ AC 100-240V  PF≥0.9  CRI≥80
- ▶ SAA  RoHS  CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JML01-580-10W	10W	580x41x111	1180lm	0.66	12PCS
JML01-860-15W	15W	860x41x111	1845lm	0.87	12PCS
JML01-1140-20W	20W	1140x41x111	2300lm	1.03	12PCS

CCT — 3000K 4000K 5000K 5700K

Finish —  White  Black  Silver  Nickel Brushed

