



Rezista Warehouse Series

REZISTA PRIMO

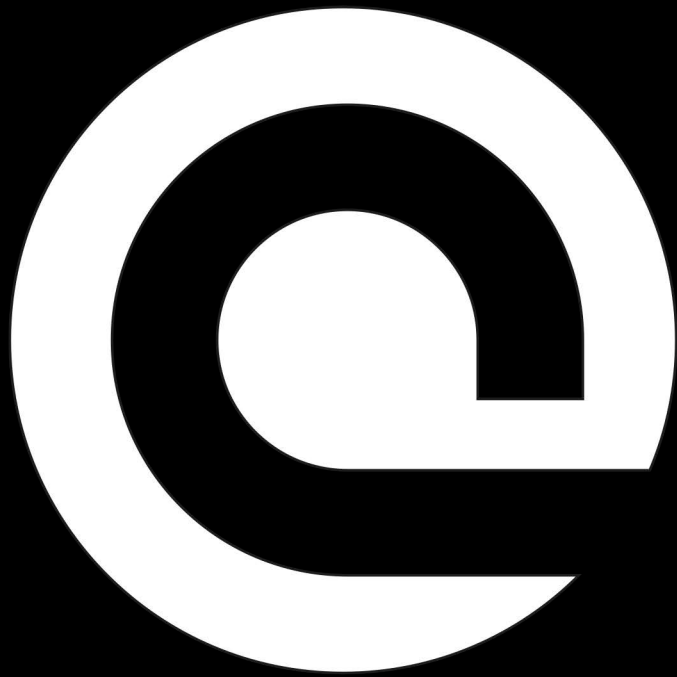

ریزیزٹا

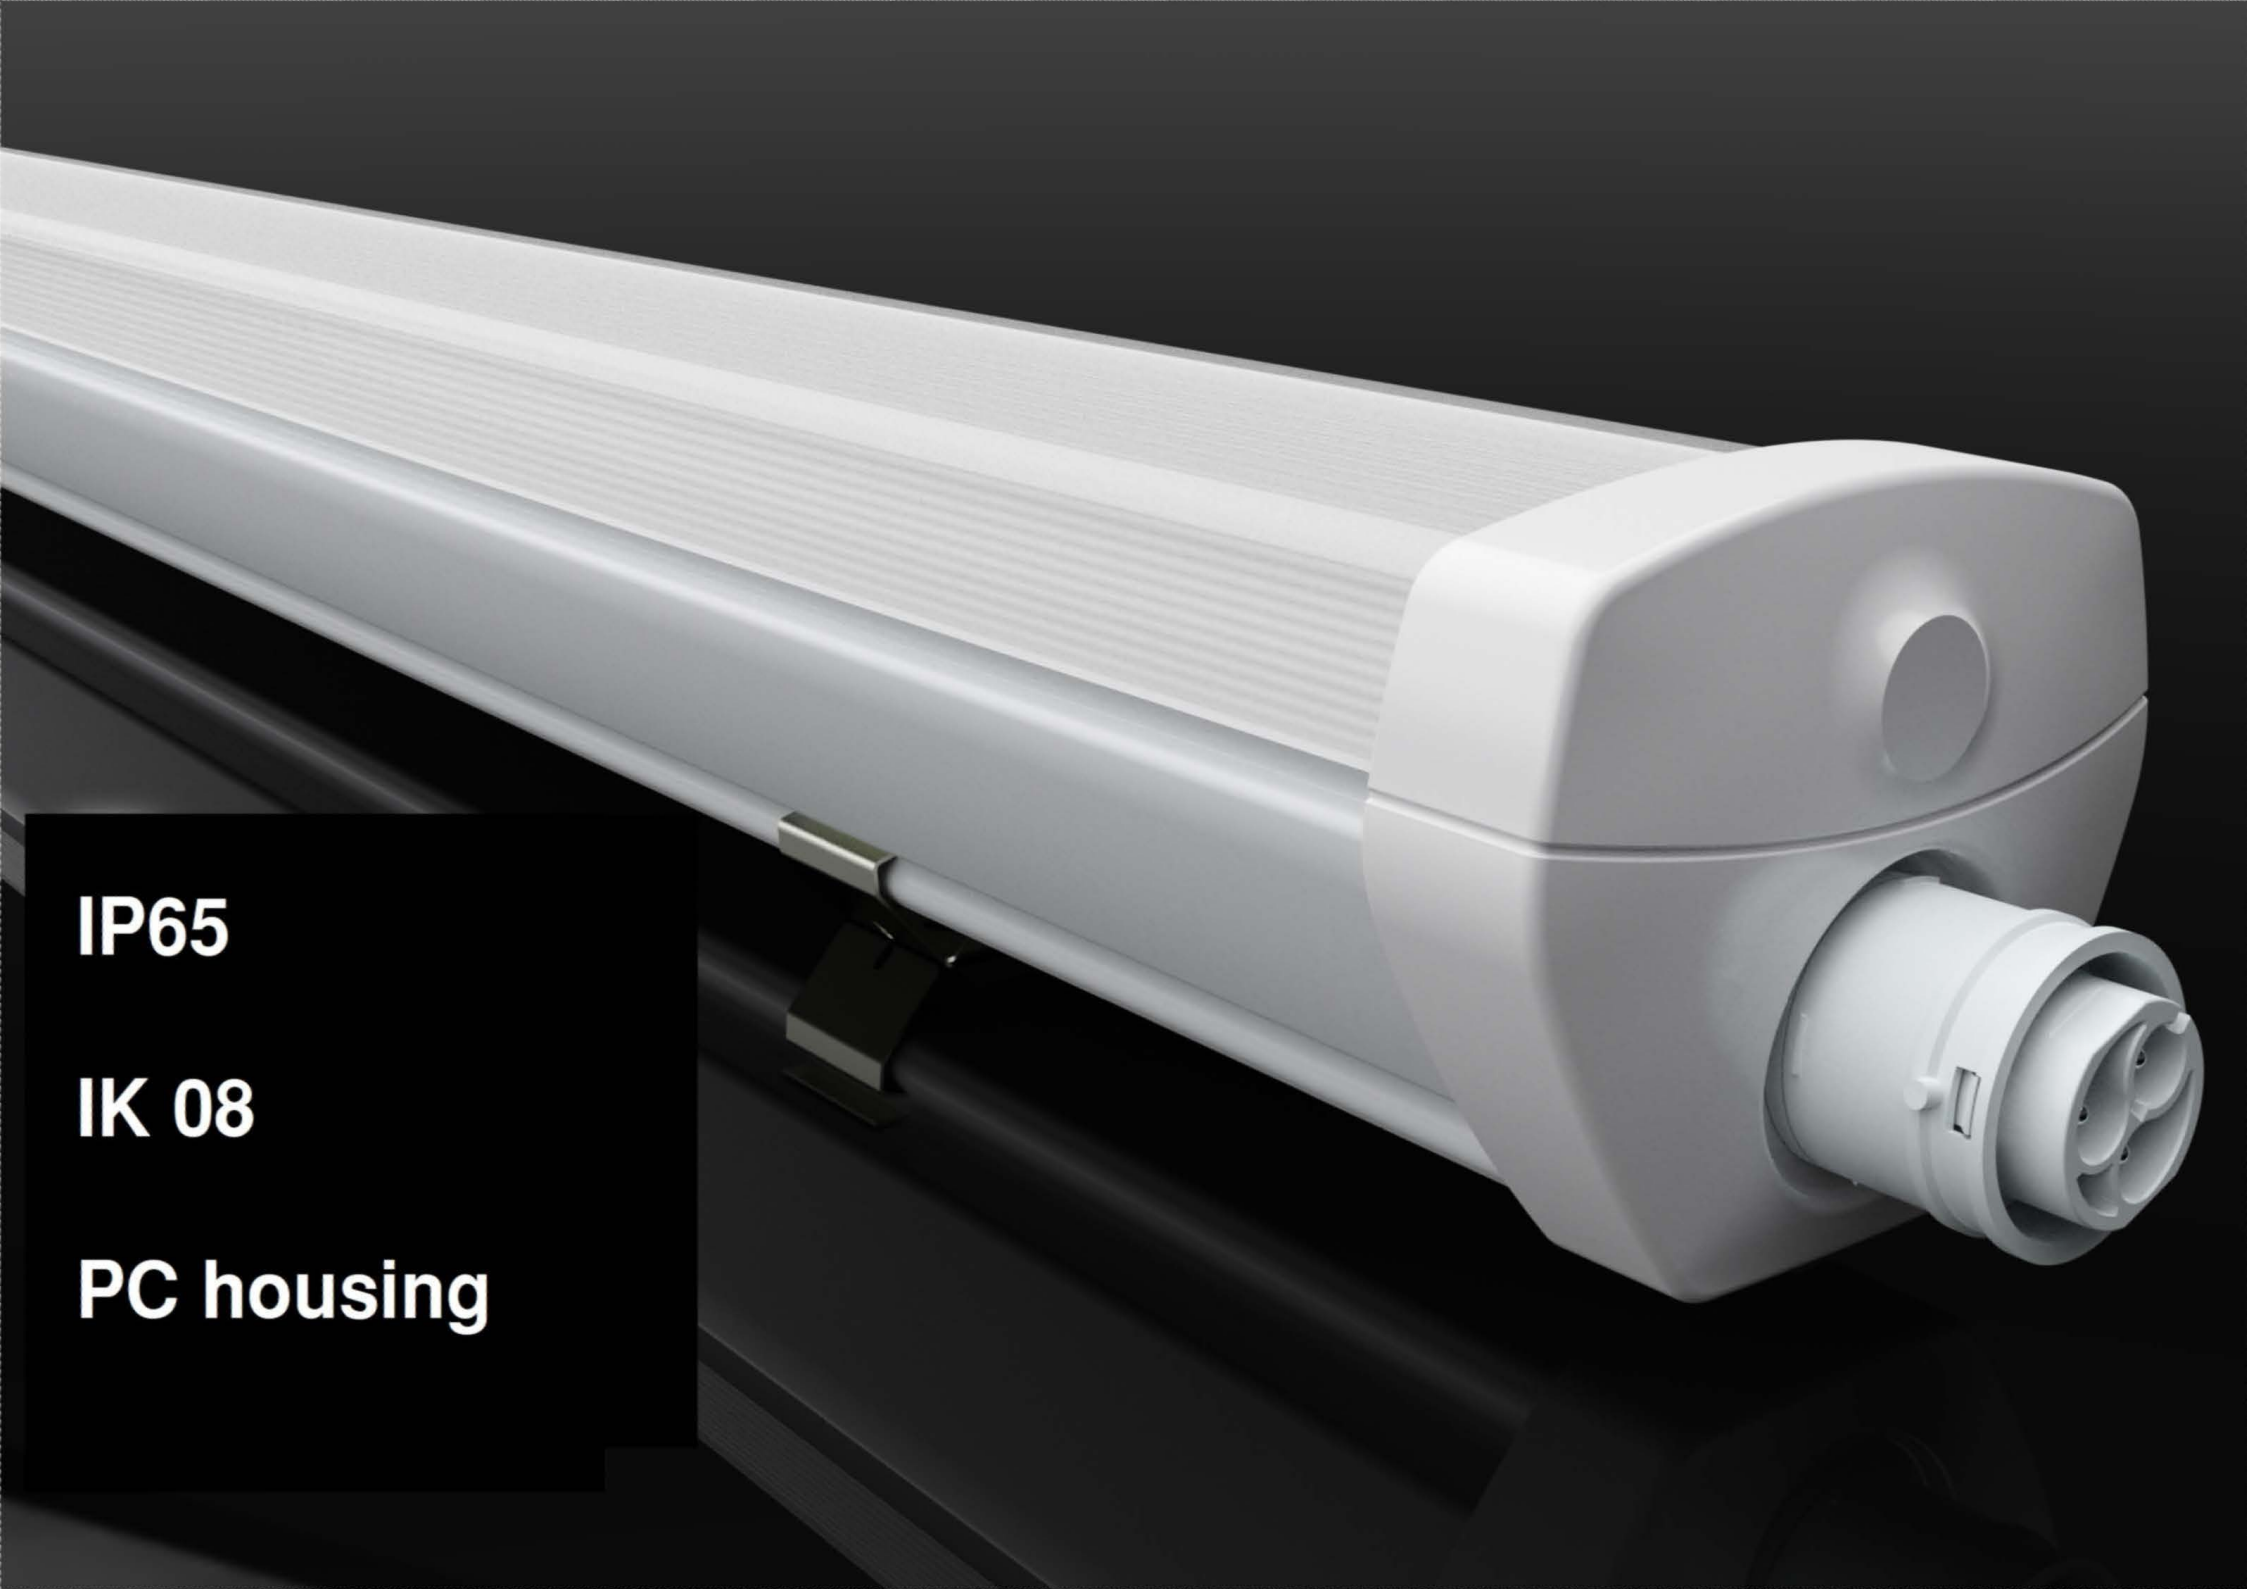


IP65

IK 08

PC housing

Rezista Primo 600 4K 2560lm IP65

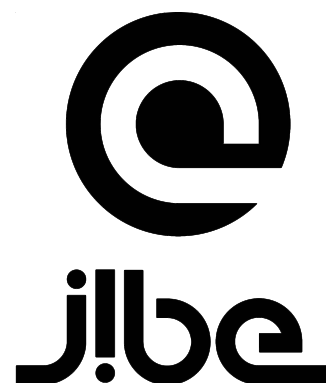

Weatherproof, surface mounted luminaire, made from polycarbonate.

Light technic:

Direct emission

LED Strip PCB (2560 lumen)

230V, 50/60Hz

21W

4000K

CRI: 80

50.000 hours @ L80/B10

SDCM: 3

Energy class: A++

Control gear

non-dimmable

Protection

Class I, IP65, IKo8, Ta= -20° +35°C

Optic

Frosted diffuser (co-extrusion)

Material and finish



Housing: Frosted Polycarbonate

End-caps: Grey Polycarbonate


Stainless steel mounting brackets

Mounting/Connection

Wall, ceiling or suspended

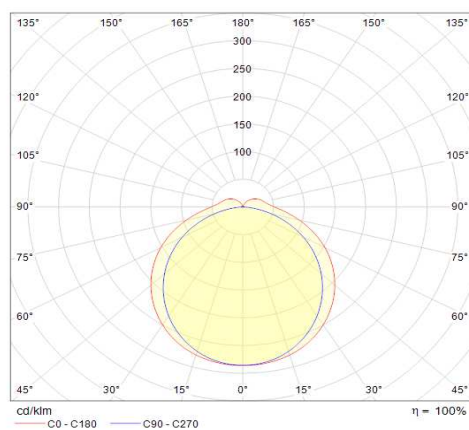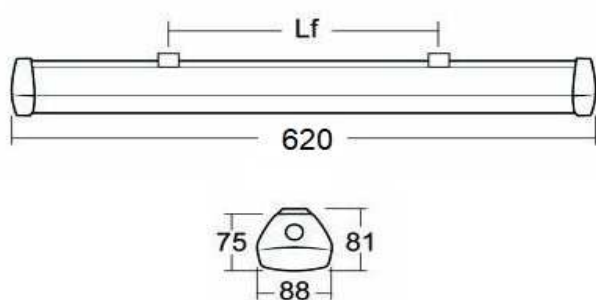

Rezista Primo 1200 4K 5130lm IP65

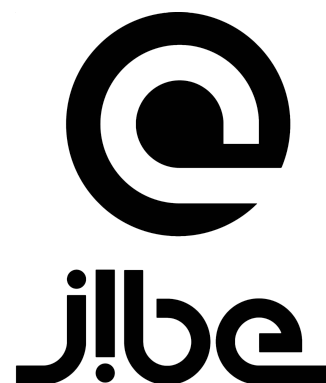

Weatherproof, surface mounted luminaire, made from polycarbonate.

Light technic:

Direct emission

LED Strip PCB (5130 lumen)

230V, 50/60Hz

39W

4000K

CRI: 80

50.000 hours @ L80/B10

SDCM: 3

Energy class: A++

Control gear

non-dimmable

Protection

Class I, IP65, IKo8, Ta= -20° +35°C

Optic

Frosted diffuser (co-extrusion)

Material and finish



Housing: Frosted Polycarbonate

End-caps: Grey Polycarbonate


Stainless steel mounting brackets

Mounting/Connection

Wall, ceiling or suspended

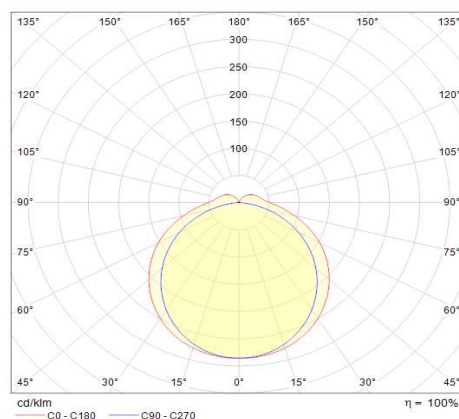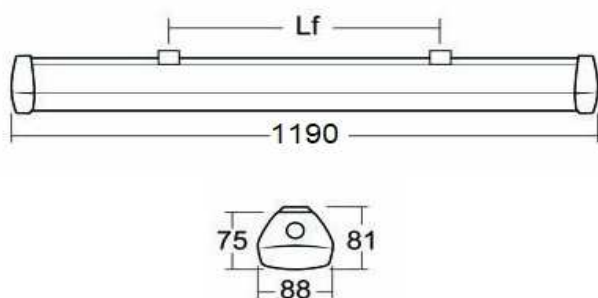

Rezista Primo 1500 4K 6420lm IP65

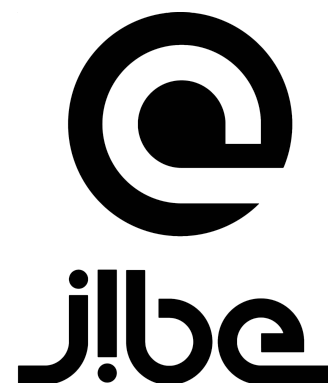

Weatherproof, surface mounted luminaire, made from polycarbonate.

Light technic:

Direct emission

LED Strip PCB (6420 lumen)

230V, 50/60Hz

49W

4000K

CRI: 80

50.000 hours @ L80/B10

SDCM: 3

Energy class: A++

Control gear

non-dimmable

Protection

Class I, IP65, IKo8, Ta= -20° +35°C

Optic

Frosted diffuser (co-extrusion)

Material and finish



Housing: Frosted Polycarbonate

End-caps: Grey Polycarbonate

Stainless steel mounting brackets


Mounting/Connection

Wall, ceiling or suspended

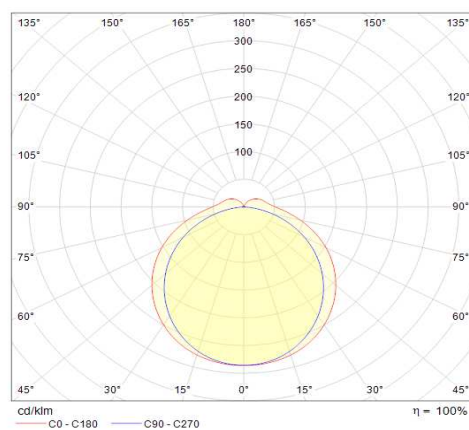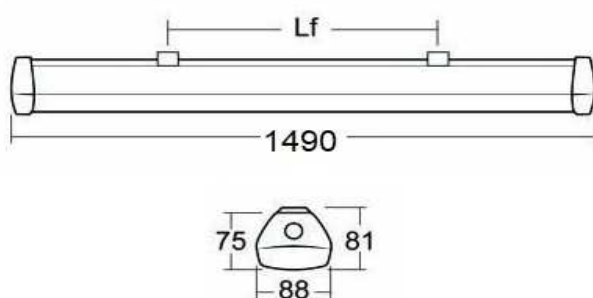

Special features

-
-
-
-
-

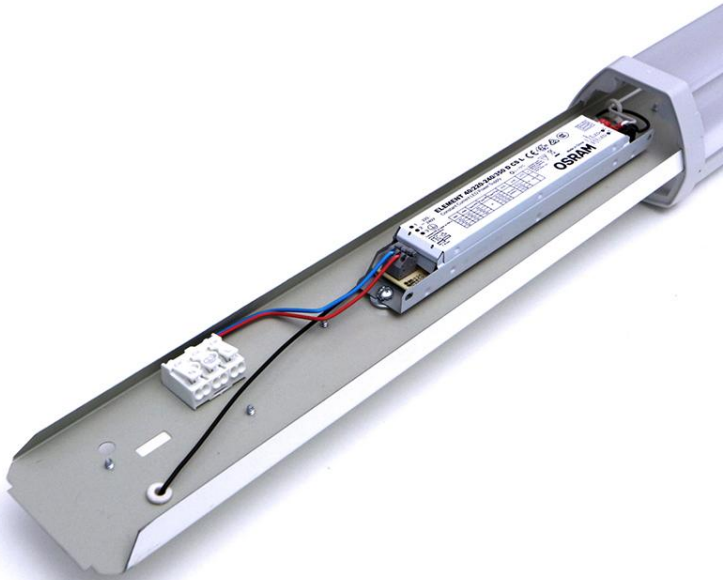

-
-
-
-
-

Installation instructions






Instructions de montage
Montageanleitung

IP65




Rezista Primo


L	Lf
600	300-450
1200	500-1050
1500	600-1350

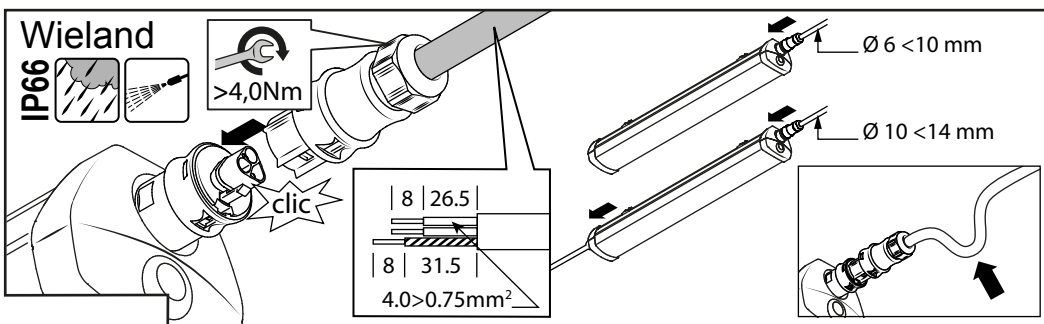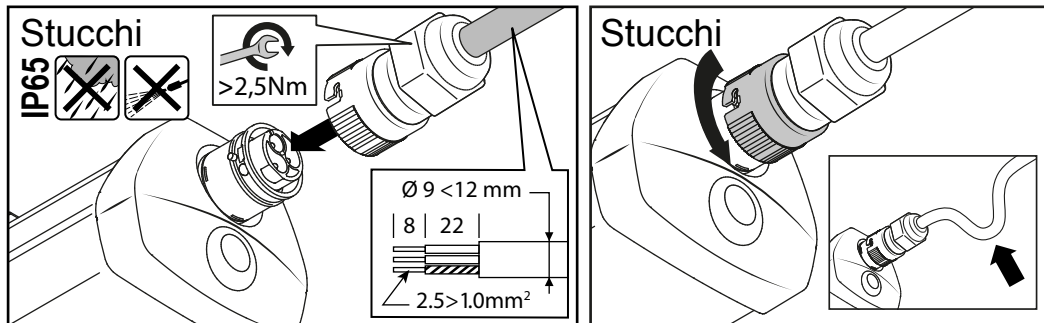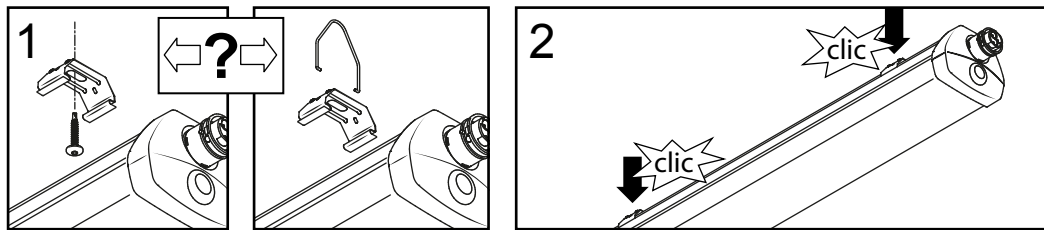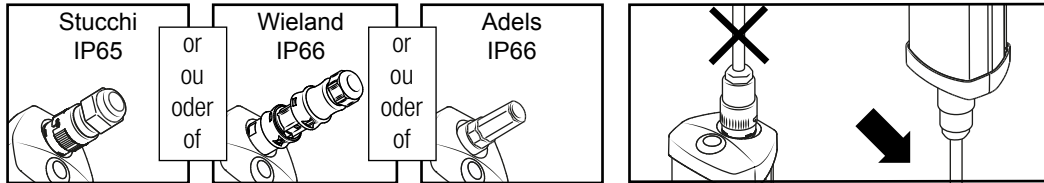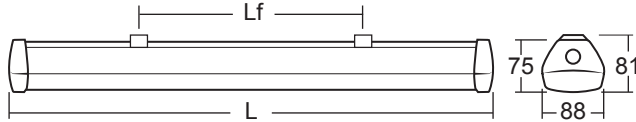

Adels

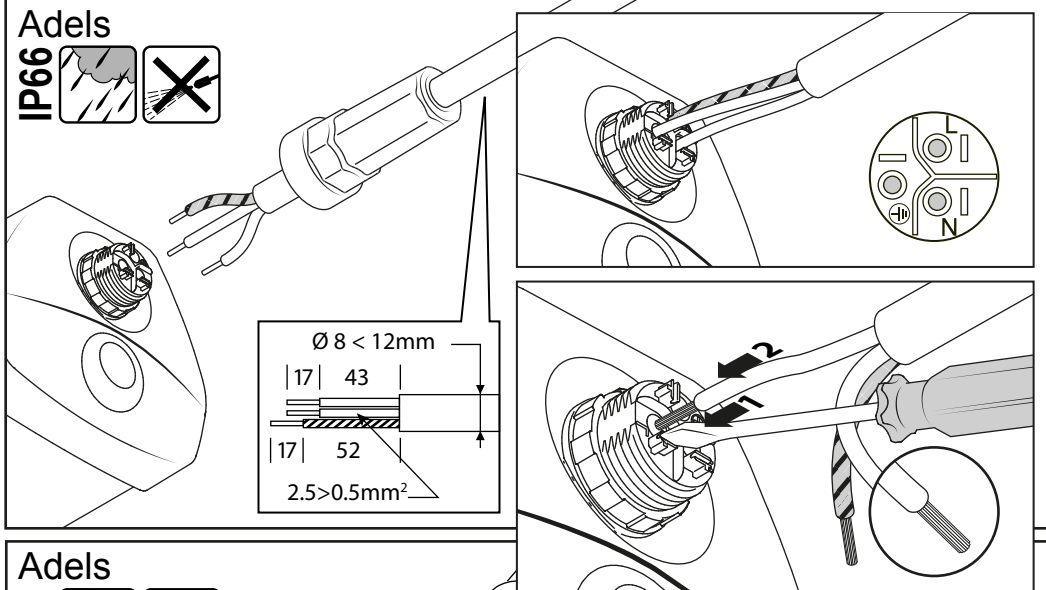

Adels

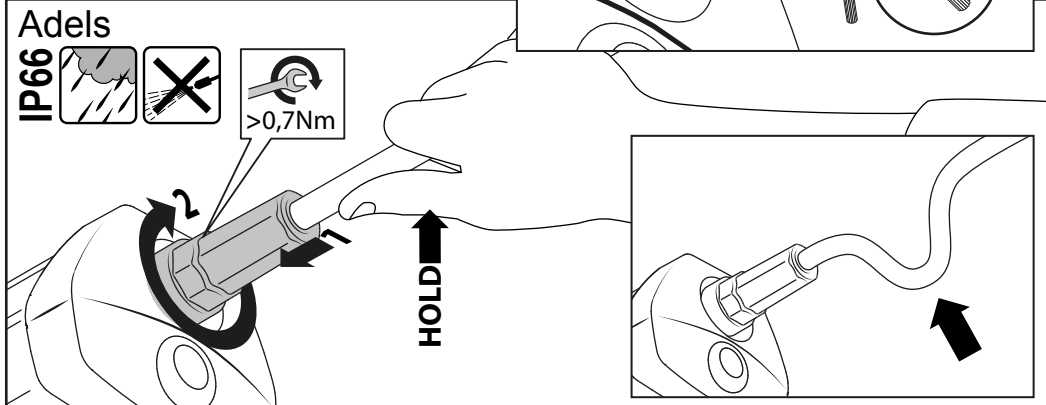

The light source of this luminaire is not replaceable; when the light source reaches its end of life, the whole luminaire shall be replaced.

La source lumineuse de ce luminaire n'est pas remplaçable; lorsque la source lumineuse atteint sa fin de vie, tout le luminaire doit être remplacé.

Die Lichtquelle dieser Leuchte ist nicht austauschbar. Wenn die Lichtquelle ihr Lebensende erreicht, muss die gesamte Leuchte ausgetauscht werden.

NOTICE on application of the luminaire.
This luminaire is suitable for indoor and outdoor use (not directly exposed). The resistance of this luminaire against chemical products or environments containing these may be limited or even nil. Before using aggressive detergents, disinfectants or installing the luminaire in hazardous areas (as car washes, swimming pools, industrial kitchens, industrial laundries, slaughterhouses, etc ...) or in case of doubt, please contact your distributor.

NOTICE sur l'application du luminaire.
Ce luminaire est conçu pour un usage intérieur ou extérieur (sous abri). La résistance de ce luminaire aux produits chimiques ou a un environnement contenant ces produits peut être limitée ou même nulle. Avant d'utiliser des détergents agressifs, désinfectants ou d'installer le luminaire dans un local dont l'atmosphère chimique est douteuse (comme les car-wash, piscines, cuisines industrielles, blanchisseries industrielles, abattoirs, etc. ...), ou en cas de doute, veuillez contacter votre distributeur. Pour certaines de ces conditions, des produits appropriés sont disponibles. Ne pas nettoyer sous haute pression.

JIBE LIGHTING – HEADQUARTERS
Hogebrinkerweg 14V - 3871 KN Hoevelaken
Netherlands Tel: +31 (0)33 844 7111
info@jibe.lighting - www.jibe.lighting



LED THERE BE LIGHT

© 2019 Jibe Lighting - all rights reserved

Jibe reserves the right to alter material, dimensions and characteristics without prior notice.

Read installation instructions carefully. Technical information on the installation instruction has precedence over the information in the brochure.

Our general terms and conditions shall apply notwithstanding any stipulation to the contrary to all the orders and agreements with Jibe.

You can obtain a copy of these conditions on demand.

For latest information and specifications of the full product range visit www.jibe.lighting