



## Longum Trunking Linear Lighting System

### Remarks:

1. All prices in the list are Ex-Works, including standard box package cost.
2. Payment Term : 30% T/T before order processing, balance before shipment.
3. Payment ways: T/T
4. Lead Time: 15-35 working days after order confirmation.
5. Valid time: 1 month.



# ORDER INFORMATION FOR TRUNK


5 Wires=Non dimming (ACL1,ACL2,ACL3,ACN,GND)

8 Wires for non-dimmable, 1-10V dimming or DALI dimming(CHR,ACL1,ACL2,ACL3,ACN,GND,DIM+,DIM-)

12 Wires for Central Battery Emergency 1-10V dimming or DALI dimming(ACL1,ACL2,ACL3,ACN,GND,DIM+,DIM-,E1+,E1-,E2+,E2-

CHR)Color: White (RAL9003)

**Material:Steel**

Picture	Model No.	DIMENSION	CABLE INSIDE	Description
	T03B1505S	1437mm	5Wires	for 1pc 1437mm led module
	T03B3005S	2874mm	5Wires	for 1pc 2874mm led module or 2pcs 1437mm LED modules
	T03B1508S	1437mm	8Wires	for 1pc 1437mm led module
	T03B3008S	2874mm	8Wires	for 1pc 2874mm led module or 2pcs 1437mm LED modules
	T03B1512S	1437mm	12Wires	for 1pc 1437mm led module
	T03B3012S	2874mm	12Wires	for 1pc 2874mm led module or 2pcs 1437mm LED modules

# ORDER INFORMATION FOR LED MODULES

Beam angle: 30°/60°/90°/120°/30X110°/Double assymetric 25°/assymetric 25° L or R


CCT: 3000K/4000K/5000K/6000K

CRI>80Ra PF>0.95

Color: White (RAL9003) Length: 1437mm

With SMD2835 LED

**Material:Steel**

Picture	Model No.	Power	Beam angle	Driver	Dimming
	T03A15L75SN	75W	120° (diffuser)	Tridonic driver	Non dimmable
	T03A15L75SD	75W	30°/60°/90°/ DA25°/25°LorR (lens)		DALI dimmable

# ORDER INFORMATION FOR LED MODULES-Central Battery Emergency of 12Wires Trunk

Beam angle: 30°/60°/90°/120°/30X110°/Double assymetric 25°/assymetric 25° L or R


CCT: 3000K/4000K/5000K/6000K

CRI>80Ra PF>0.95



Color: White (RAL9003) Length: 1437mm

With SMD2835 LED


**Material:Steel**

Picture	Model No.	Power	Beam angle	Driver	Dimming
	T03A15L75SN-CB	75W	120° (diffuser)	Tridonic driver	Non dimmable
	T03A15L75SD-CB	75W	30°/60°/90°/ DA25°/25°LorR (lens)		DALI dimmable


## ORDER INFORMATION FOR BLANK COVER MODULE

Picture	Model No.	DIMENSION	Color	Description
	T03A15CAS	1437mm	White	Blank cover,PC type, for 1437mm trunk
	T03A15CBS	1437mm	White	Blank cover,Aluminum type,for 1437mm trunk


## ORDER INFORMATION FOR SENSOR MODULE

Picture	Model No.	DIMENSION	Color	Description
	T03A150SNS	1437mm	White	Microwave sensor
	T03A150SDS	1437mm	White	DALI SENSOR(HYTRONIK)


## ORDER INFORMATION FOR TRACK MODULE

Picture	Model No.	DIMENSION	Wires	Description
	T03A15TS	1437mm	8	with 700mm ENEC approved Track for 1437mm trunk













## ORDER INFORMATION FOR Socket module

Picture	Model No.	DIMENSION	Color	Description
	PRO-4230V	102x54x88mm	White	Socket module with track adaptor, Work with Trieco track module

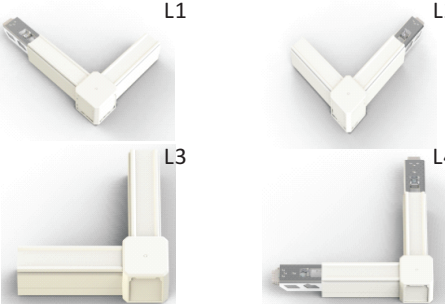
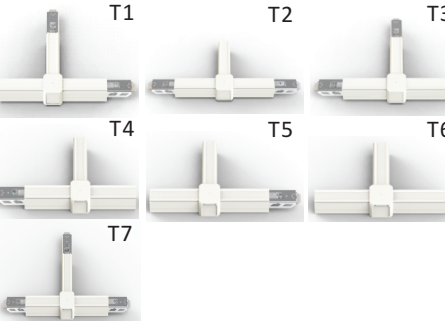
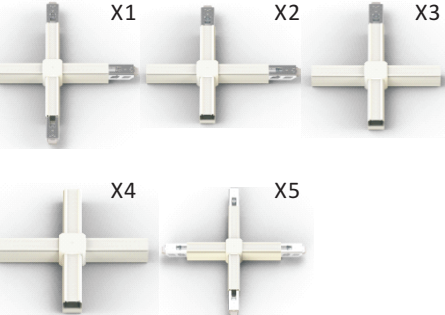
## ORDER INFORMATION FOR Trieco driver

Picture	Model No.	Dimming	Power
	TR75W-01	1-10V	75W adjustable to 65W/55W/45W/ 40W/35W/30W/25W
	TR75W-02	Dali	

## ORDER INFORMATION FOR ACCESSORIES

Picture	Model No.	Description	Notes
	DMA001S	Surface ceiling fixing Kits Size : 53*36*15mm Thickness : 0.5mm spring steel	every 2.5m trunk require 2pcs
	DMA002S	Steel cable suspesion kits length: 2 meter	every 2.5m trunk require 2pcs
	DMA003S	Chain suspension kits length: 2 meter	every 2.5m trunk require 2pcs
	DMA004S	Input cable protector	1pc required for 5 wires trunk 2pcs required for 8 wires trunk
	DMA005S	Endcap & input cap	1 unit required per line
	DMA005SS	Steel end box box-Alternative for DMA005	1 unit required per line
	DMA005MSS	5/8 wire out put end box	for 220v power cable loop out to next line
	DMA013S	5/8/12 wire Terminal Feed In Box For electrical feed in	for 220v power cable feed in,alternative for DMA006
	DMA006S	5 wires AC input terminal	for 220v power cable feed in,alternative for DMA013
		8 wires AC input terminal	
		12 wires AC input terminal	
	DMA006MS	5 wires AC output terminal	for 220v power cable loop out to next line
		8 wires AC output terminal	
		12 wires AC output terminal	
	DMAL	For lens changing Lens: 30 °/ 60 °/ 90 °/ Double assymetric 25°/	1.5M module require 5units
	DMA007S	Conduit trunk, silver color length:1437mm	1.5M trunk require 1pc

# ORDER INFORMATION FOR ACCESSORIES

Picture	Model No.	Description	Notes
	DMA007- L1/L2/L3/L4	5/8 wires "L" Node Connector	for lines 90° turning,when ordering,please advise L1~L4 which one you need
		12 wires "L" Node Connector	
	DMA009-T1/T2/ T3/T4/T5/T6/T7	5/8 wires "T" Node Connector	for 3 lines combination please advise T1~T7 which one you need when ordering
		12 wires "T" Node Connector	
	DMA011- X1/X2/X3/X4/X5	5/8 wires "X" Node Connector	for 4 lines combination please advise X1-X5 which one you need when ordering
		12 wires "X" Node Connector	