

JIBE LIGHTING — HEADQUARTERS
Hogebrinkerweg 14V - 3871 KN Hoevelaken
Netherlands Tel: +31 (0)33 844 7111
info@jibe.lighting - www.jibe.lighting



Jibe


LED THERE BE LIGHT

JIBE LIGHTING — GERMANY
Marie-Curie-Ring 38- 63477 Maintal
Germany Tel: +49 (0)6181 90 90 509
Mob : +49 (0)162 26 36 614
fax : +49 (0)6181 61 01 618
s.fischer@jibe-lighting.de

JIBE LIGHTING — NORTH AMERICA
5917 NW 63 Way - Parkland FL 33067
USA Tel: 954-899-4040
todd.darling@jibeusa.lighting

© 2020 Jibe Lighting - all rights reserved
Jibe reserves the right to alter material, dimensions and characteristics without prior notice.
Read installation instructions carefully. Technical information on the installation instruction
has precedence over the information in the brochure.
Our general terms and conditions shall apply notwithstanding any stipulation to the contrary
to all the orders and agreements with Jibe.
You can obtain a copy of these conditions on demand.
For latest information and specifications of the full product range
visit www.jibe.lighting

LED
PANEL LIGHT
SERIES

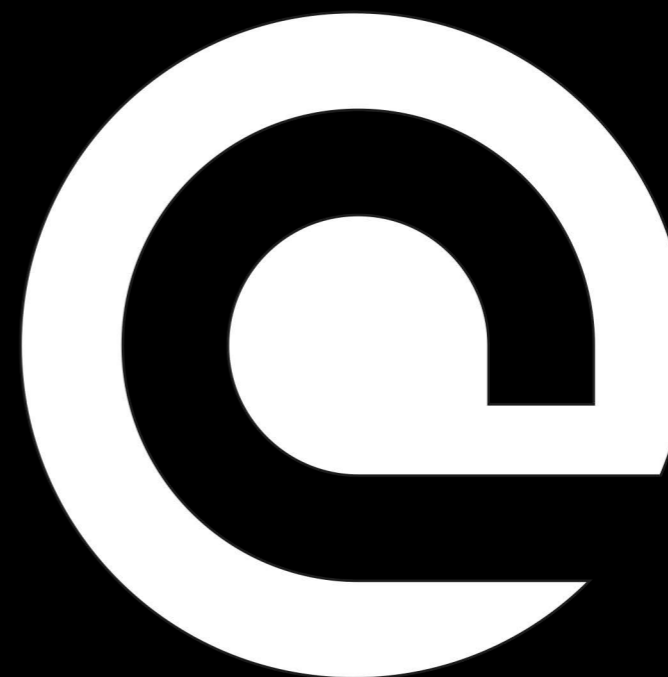


Jibe



LED Panel Light /Series/

LED panel light is one of the most popular luminaire for commercial lighting, with continuous modification of its design, light efficiency, CRI, UGR and smart function, Jibe Lighting is always capable of providing customers with helpful solution and best price, that's the main reason Jibe Lighting is preferred supplier of LED panel lamp in the market. Jive Lighting LED panel family supply different solution for project and distribution, such us regular LED panel with high Lumen and low UGR, CCT changing LED panel, waterproof led panel, frameless led panel, Up/down emitting led panel, big size round led panel with recessed / surface mounted / pendant installation, TUV-CE approved Jibe Lighting driver and Lifud, Tridonic, Philips driver ensure our reputation of quality always.

JGL-P Panel light



JGL-P panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, SPCC housing plus PC + ABS module form ideal combination of stylish design, it is a perfect replacement for traditional grill lamp.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JGL6060-35W-P	35W	595x595x23.5	580x580	4085lm	3.50	4PCS
JGL6262-35W-P	35W	620x620x23.5	605x605	4090lm	3.65	4PCS
JGL30120-35W-P	35W	1195x295x23.5	1180x280	3995lm	3.55	4PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White

JPL-AZ Panel light



JPL-AZ panel light is direct lighting with louver anti-glare design with external driver, adopting high lumen SMD led and special lens which provide high light efficiency and uniform light output, SPCC housing plus PC module form ideal combination of stylish design, the luminous module can be replaced, which ensure the easy maintenance.it is a ideal replacement for traditional 3*24W HO T5 and 3*18W T8 fluorescent louver luminaries and side lit LED panel light.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL6060-30W-AZ	30W	595x595x15	580x580	3450lm	3.20	4PCS
JPL6060-35W-AZ	35W	595x595x15	580x580	3950lm	3.20	4PCS
JPL6262-30W-AZ	30W	620x620x15	605x605	3450lm	3.50	4PCS
JPL6262-35W-AZ	35W	620x620x15	605x605	3950lm	3.50	4PCS
JPL30120-30W-AZ	30W	1195x295x17.5	1180x280	3450lm	3.60	4PCS
JPL30120-35W-AZ	35W	1195x295x17.5	1180x280	3950lm	3.60	4PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White

JPL-AK Panel light



JPL-AK panel light is a module design with external driver, featuring PC louver reflectors to help reduce UGR, offers the ideal combination of stylish design and optimum performance for both task and general lighting; Module replaceable, easy to install and maintain. Available in various installation ways: recessed, suspended and surface mounted, and can replace the traditional panel light.


- ▶ 100°
- ▶ IP40
- ▶ UGR<16
- ▶ DIM
- ▶ DALI
- ▶ 0-10V
- ▶ TUNABLE WHITE
- ▶ SLIDE SWITCH 3 in 1
- ▶ AC 220-240V
- ▶ PF≥0.9
- ▶ CRI≥80
- ▶ RoHS
- ▶ CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3060-18W-AK	18W	595x295x36	580x280	2010lm	1.55	4PCS
JPL6060-25W-AK	25W	595x595x36	580x580	3552lm	2.90	4PCS
JPL6060-30W-AK	30W	595x595x36	580x580	3660lm	2.90	4PCS
JPL6060-36W-AK	36W	595x595x36	580x580	3900lm	2.90	4PCS
JPL6262-36W-AK	36W	620x620x36	605x605	3900lm	3.30	4PCS
JPL30120-36W-AK	36W	1195x295x36	1180x280	3920lm	2.95	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-CB Panel light



JPL-CB panel light is a 9mm thickness panel with external driver; PMMA LGP produce uniform light and high lumen output; Adopts high lumen SMD with CRI>80, 100lm/W, 130lm/W, SDCM<3 solution can be provided, Triac dim, 0-10V dimmable, DALI dimmable, Emergency all available. It can fit seamlessly into any work place, available in various installation ways: recessed, suspended and surface mounted.

- ▶ 120°
- ▶ IP40
- ▶ UGR<19
- ▶ DIM
- ▶ DALI
- ▶ 0-10V
- ▶ SLIDE SWITCH 3 in 1
- ▶ Smart Lighting
- ▶ AC 220-240V
- ▶ PF≥0.9
- ▶ CRI≥80
- ▶ SDCM <3
- ▶ TP(a)
- ▶ TP(b)
- ▶ RoHS
- ▶ CE
- ▶ CB


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-18W-CB	18W	295x295x9	280x280	100LM/W	0.85	5PCS
JPL3060-20W-CB	20W	595x295x9	580x280	100LM/W	1.35	5PCS
JPL30120-33W-CB	33W	1195x295x9	1180x280	100LM/W	2.40	5PCS
JPL30120-42W-CB	42W	1195x295x9	1180x280	100LM/W	2.40	5PCS
JPL6060-33W-CB	33W	595x595x9	580x580	100LM/W	2.35	5PCS
JPL6060-42W-CB	42W	595x595x9	580x580	100LM/W	2.35	5PCS
JPL60120-60W-CB	60W	1195x595x9	1180x580	100LM/W	5.30	2PCS
JPL6262-33W-CB	33W	620x620x9	605x605	100LM/W	2.55	5PCS
JPL6262-42W-CB	42W	620x620x9	605x605	100LM/W	2.55	5PCS
JPL6060-25W-CB	25W	595x595x9	580x580	130LM/W	2.35	5PCS
JPL6262-25W-CB	25W	620x620x9	605x605	130LM/W	2.55	5PCS
JPL30120-25W-CB	25W	1195x295x9	1180x280	130LM/W	2.40	5PCS
JPL60120-45W-	45W	1195x595x9	1180x580	130LM/W	5.30	2PCS

CB CCT 3000K 4000K 5000K 5700K

Finish White



JPL-CK Backlit panel light




JPL-CK LED panel is a direct lighting with external driver, adopts SMD led with optical lens to provide a uniform light effect, no LGP design makes this panel more cost effective compared with normal edge-lit panel light, UGR<19 available, high efficiency available with 100lm/W, 120lm/W and 140lm/W. Recessed, suspended and surface mounted installation ways for choice.

- ▶ 120°
- ▶ IP20 IP44 UGR<19
- ▶ DIM DALI 0-10V SIDE SWITCH 3 in 1 Smart Lighting
- ▶ AC 200-240V PF≥0.9 CRI≥80 SDCM <3 TP(a) TP(b)
- ▶ RoHS CE CB



JPL-CK Backlit panel light

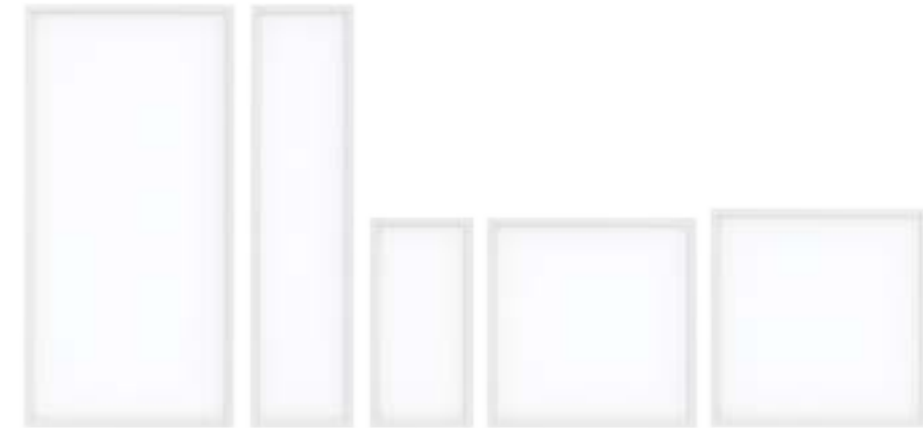


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3060-16W-CK	16W	595x295x32	580x280	100LM/W	1.01	5PCS/6PCS
JPL6060-36W-CK	36W	595x595x32	580x580	100LM/W	1.56	5PCS/6PCS
JPL6262-36W-CK	36W	620x620x32	605x605	100LM/W	1.98	5PCS/6PCS
JPL30120-36W-CK	36W	1195x295x32	1180x280	100LM/W	1.72	5PCS/6PCS
JPL60120-60W-CK	60W	1195x595x32	1180x580	100LM/W	3.20	4PCS/4PCS
JPL3060-16W-CK	16W	595x295x32	580x280	120LM/W	1.01	5PCS/6PCS
JPL6060-30W-CK	30W	595x595x32	580x580	120LM/W	1.56	5PCS/6PCS
JPL6262-30W-CK	30W	620x620x32	605x605	120LM/W	1.98	5PCS/6PCS
JPL30120-30W-CK	30W	1195x295x32	1180x280	120LM/W	1.72	5PCS/6PCS
JPL60120-50W-CK	50W	1195x595x32	1180x580	120LM/W	3.20	4PCS
JPL60120-60W-CK	60W	1195x595x32	1180x580	120LM/W	3.20	4PCS
JPL6060-30W-CK	30W	595x595x32	580x580	140LM/W	1.56	5PCS/6PCS
JPL6262-30W-CK	30W	620x620x32	605x605	140LM/W	1.98	5PCS/6PCS
JPL30120-30W-CK	30W	1195x295x32	1180x280	140LM/W	1.72	5PCS/6PCS
JPL60120-50W-CK	50W	1195x595x32	1180x580	140LM/W	3.20	4PCS

LED Panel light

CCT — 3000K 4000K 5000K 5700K

Finish — White

JPL-CK2 Backlit panel light



JPL-CK2 is a frameless backlit panel, adopts high quality SMD LEDs, 2CCT/ 3CCT adjustable by slide switch is available.

- ▶ 120° IP40
- ▶ DIM DALI 0-10V SLIDE SWITCH 3 in 1
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80 TP(a) TP(b)
- ▶ SAA CE CB

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL6060-36W-CK2	36W	595x595x28	580x580	120LM/W	1.50	5PCS/6PCS
JPL6060-25W-CK2	25W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS
JPL6060-28W-CK2	28W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White



LED Panel light

JPL-AM1 Panel light



JPL-AM1 panel is 8mm thickness panel, adopts high lumen SMD LED with CRI >80. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers. The ultra slim profile fits seamlessly into any work place. It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-18W-AM1	18W	295x295x8	280x280	1355lm	1.20	5PCS
JPL6060-36W-AM1	36W	595x595x8	580x580	3200lm	2.28	5PCS
JPL6262-36W-AM1	36W	620x620x8	605x605	3105lm	3.10	5PCS
JPL30120-36W-AM1	36W	1195x295x8	1180x280	3190lm	2.30	5PCS
JPL60120-60W-AM1	60W	1195x595x8	1180x580	5760lm	5.00	2PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-AF1 Panel light



JPL-AF1 panel is 8mm thickness panel, adopts high lumen SMD LED with CRI >80. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers. The ultra slim profile fits seamlessly into any work place. It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.


-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-
-

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-18W-AF1	18W	295x295x8	280x280	1355lm	1.20	5PCS
JPL6060-36W-AF1	36W	595x595x8	580x580	3200lm	2.28	5PCS
JPL6262-36W-AF1	36W	620x620x8	605x605	3105lm	3.10	5PCS
JPL30120-36W-AF1	36W	1195x295x8	1180x280	3190lm	2.30	5PCS
JPL60120-60W-AF1	60W	1195x595x8	1180x580	5760lm	5.00	2PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-G5A Panel light



JPL-G5A panel is 10mm thickness panel, which adopts high lumen SMD LED with CRI >80, 100lm/W and 120lm/W optional. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers. It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.


- ▶ 120° IP40
- ▶ DIM DALI 0-10V TUNABLE WHITE SLIDE SWITCH 3 in 1
- ▶ AC 200-240V PF≥0.9 CRI≥80 TP(a) TP(b)
- ▶ SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-18W-G5A	18W	295x295x10	280x280	1685lm	1.35	5PCS
JPL3060-20W-G5A	20W	595x295x10	580x280	1920lm	2.50	5PCS
JPL30120-26W-G5A	26W	1195x295x10	1180x280	3210lm	3.80	5PCS
JPL30120-42W-G5A	42W	1195x295x10	1180x280	4200lm	3.80	5PCS
JPL6060-26W-G5A	26W	595x595x10	580x580	3265lm	3.70	5PCS
JPL6060-42W-G5A	42W	595x595x10	580x580	4250lm	3.70	5PCS
JPL60120-60W-G5A	60W	1195x595x10	1180x580	6240lm	7.50	2PCS
JPL6262-26W-G5A	26W	620x620x10	605x605	3290lm	4.20	5PCS
JPL6262-42W-G5A	42W	620x620x10	605x605	4250lm	4.20	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-G6A Panel light



JPL-G6A is UGR<19 LED panel with 10mm thickness, which adopts high lumen SMD LED with CRI >80, 100lm/W and 120lm/W optional. It also can meet the medical light source COI <3.3. Top branded external driver comes with triac dim, 0-10V dim and DALI dim, it has perfect dimming range and shares great compatibility with worldwide famous brand dimmers. The ultra slim profile fits seamlessly into any work place. It is available in various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

- ▶ 80° IP40 UGR<19
- ▶ DIM DALI 0-10V TUNABLE WHITE SLIDE SWITCH 3 in 1
- ▶ AC 200-240V PF≥0.9 CRI≥80 TP(a) TP(b)
- ▶ SAA RoHS CE


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-18W-G6A	18W	295x295x10	280x280	1665lm	1.35	5PCS
JPL3060-20W-G6A	20W	595x295x10	580x280	1900lm	2.50	5PCS
JPL30120-26W-G6A	26W	1195x295x10	1180x280	3175lm	3.80	5PCS
JPL30120-42W-G6A	42W	1195x295x10	1180x280	4200lm	3.80	5PCS
JPL6060-26W-G6A	26W	595x595x10	580x580	3190lm	3.70	5PCS
JPL6060-42W-G6A	42W	595x595x10	580x580	4250lm	3.70	5PCS
JPL60120-60W-G6A	60W	1195x595x10	1180x580	6060lm	7.50	2PCS
JPL6262-26W-G6A	26W	620x620x10	605x605	3230lm	4.20	5PCS
JPL6262-42W-G6A	42W	620x620x10	605x605	4250lm	4.20	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White



JPL-CC Panel light



JPL-CC panel is 14.3mm thickness panel with external driver, adopts high lumen LED chips with CRI>80, PMMA LGP produces uniform and comfortable light. Stronger frame makes better heat dissipation than common panels. The lighting area fits seamlessly with the ceiling. Recessed installation with clips make it suitable for more kinds of ceiling perfectly.

- ▶ 120° IP40 UGR<19
- ▶ DIM DALI 0-10V
- ▶ AC 220-240V PF≥0.9 CRI≥80 TP(a) TP(b)
- ▶


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL6060-33W-CC	33W	595x595x14.3	580x580	3530lm	2.50	5PCS
JPL6060-42W-CC	42W	595x595x14.3	580x580	4370lm	2.50	5PCS
JPL30120-33W-CC	33W	1195x295x14.3	1180x280	3400lm	2.65	5PCS
JPL30120-42W-CC	42W	1195x295x14.3	1180x280	4210lm	2.65	5PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White



JPL-CD Panel light



JPL-CD panel light is 8.5mm thickness frame with fixed spring design panel light with external driver, adopts high lumen LED chips with CRI>80, special frame design provides excellent thermal management. Recessed installation with clips makes it suitable for more kinds of ceiling.


- ▶ 120° IP40 UGR<19
- ▶ DIM DALI 0-10V
- ▶ AC 220-240V PF≥0.9 CRI≥80 TP(a) TP(b)
- ▶

Code	Watt	Size(AxBxCxDmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL6060-33W-CD	33W	595x595x35.5	580x580	3460lm	2.35	5PCS
JPL30120-33W-CD	33W	1195x295x35.5	1180x280	3400lm	2.40	5PCS


CCT — 3000K 4000K 5000K 5700K

Finish — White

JPL-BC Panel light



JPL-BC panel light consist of metal frame and LED panel with external driver, LED panel adopts prismatic diffuser (low glare UGR<19) which produce uniform light and high lumen output; The metal frame with air slot design to allow the air to circulate; Separated panel module ensures the easy installation and maintenance, it is a ideal replacement for traditional T8 fluorescent louver luminaries and side lit LED panel light.

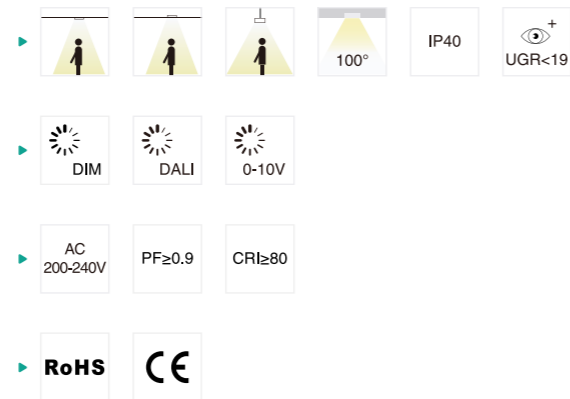


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL6060-40W-BC	40W	595x595x11	580x580	4165lm	/	/
Panel Module	/	570x415x8	/	/	1.85	5PCS
Panel Frame	/	595x595x11	/	/	1.40	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-DS Backlit panel light



JPL-DS panel adopts upper and lower frame structure design to reach an IP65 waterproof effect, it has a strong structure with 10mm thickness. Upper and lower 6063 Aluminium frames provide a great thermal management to ensure a long lifespan. Besides, it has high lumen SMD light source and PMMA LGP which offer a uniform light output and avoid yellow risky. External IP65 flicker free driver with waterproof DC connector. Multiple installation ways: recessed, suspended and surface mounted.



Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-15W-DS	15W	595x295x10	580x280	1275lm	1.05	10PCS
JPL3060-20W-DS	20W	595x295x10	580x280	1800lm	1.79	5PCS
JPL6060-36W-DS	36W	595x595x10	580x580	3600lm	3.16	4PCS
JPL6262-36W-DS	36W	620x620x10	605x605	3600lm	3.43	4PCS
JPL30120-36W-DS	36W	1195x295x10	1180x280	3600lm	3.31	4PCS
JPL60120-60W-DS	60W	1195x595x10	1180x580	6300lm	6.37	2PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-CQ Panel light



JPL-CQ panel light is IP65 waterproof design with external driver. Adopt high lumen efficiency SMD LED with even light output. Aluminum frame provides excellent thermal management. Multiple installation way: recessed, suspended and surface mounted.


- ▶ 120° IP65 DIM DALI 0-10V
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-18W-CQ	18W	295x295x8	280x280	1890lm	1.03	10PCS
JPL3060-20W-CQ	20W	595x295x8	580x280	2100lm	1.67	5PCS
JPL6060-36W-CQ	36W	595x595x8	580x580	3780lm	2.85	4PCS
JPL6262-36W-CQ	36W	620x620x8	605x605	3780lm	3.04	4PCS
JPL30120-36W-CQ	36W	1195x295x8	1180x280	3780lm	2.89	4PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-CL Panel light



JPL-CL LED panel light is a screwless design with flat frame and no back plate, adopting PMMA LGP which produces uniform light and high lumen output, good quality SMD with 110lm/W. Triac dim, 0-10V dimmable, DALI dimmable and 3 CCT interchangeable are available. It can fit seamlessly into any work place, available in various installation ways: recessed, suspended and surface mounted.


- ▶ 120° IP20 UGR < 19
- ▶ DIM DALI 0-10V SMD SWITCH 3 in 1
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ RoHS CE

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3030-18W-CL	18W	295x295x9	280x280	1850lm	0.56	10PCS
JPL3060-20W-CL	20W	295x595x9	280x280	2100lm	0.95	5PCS
JPL6060-30W-CL	30W	595x595x9	580x580	3650lm	1.60	5PCS
JPL6262-30W-CL	30W	620x620x9	605x605	3650lm	1.75	5PCS
JPL30120-30W-CL	30W	1195x295x9	1180x280	3600lm	1.70	5PCS
JPL6060-36W-CL	36W	595x595x9	580x580	4000lm	1.60	5PCS
JPL6262-36W-CL	36W	620x620x9	605x605	4000lm	1.75	5PCS
JPL30120-36W-CL	36W	1195x295x9	1180x280	3900lm	1.70	5PCS

CCT 3000K 4000K 5000K 5700K

Finish White

JPL-DP Backlit panel light



JPL-DP is smart panel light , which is comprised of driver, smart control module and induction module. Connect Bluetooth between the mobile phone and the lamp, then the mobile phone APP can control the lamp. Users can adjust the brightness and color temperature of lamps according to their own needs. Automatic light supplement can also be realized by photo sensor. The PIR sensor is used to switch the on/off state of the photosensitive sensor and PIR sensor of the Lamp.


- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL6060-40W-DP	40W	595x595x8.5	580x580	4000lm	3.10	4PCS
JPL6262-40W-DP	40W	620x620x8.5	605x605	4000lm	3.50	4PCS
JPL30120-40W-DP	40W	1195x295x8.5	1180x280	4000lm	3.10	4PCS

CCT

Finish

JPL-DE Panel light



JPL-DE is a new grill design with UGR<19.COI (Cyanosis Observation Index) compliant.Air slot available.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3060-DE	13W	292x592x48	/	1365lm	2.60	4PCS
JPL3012-DE	28W	1192x292x48	/	2940lm	2.99	4PCS
JPL4012-DE	28W	1192x392x48	/	2940lm	2.73	2PCS
JPL6060-DE	28W	592x592x48	/	2940lm	5.41	4PCS
JPL3015-DE	40W	1492x292x48	/	4200lm	3.73	4PCS

CCT

Finish

JGL-AA Panel light



JGL-AA backlit troffer is new anti-glare design, the compact and seamless splicing make it a great looking. It adopts anti-glare prism plate to reach UGR<19, could be interchangeable CCT (3000K+4000K +5700K) with slide switch.


- ▶
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JGL6060-36W-AA	36W	595x595x49	580x580	3960lm	2.60	5PCS
JGL30120-36W-AA	36W	1195x295x49	1180x280	3960lm	2.99	5PCS
JGL6262-36W-AA	36W	620x620x49	605x605	3960lm	2.73	5PCS
JGL60120-60W-AA	60W	1195x595x49	1180x580	6500lm	5.41	2PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White

JGL-N Troffer light



JGL-N is troffer light with external driver, adopts secondary optical designed and special treatment diffuser to achieve more uniform and softer light, providing more comfortable visual experience. Luminous efficiency 105lm/W. Powder spraying surface treatment is employed in the lamp fixture which makes the lamp corrosion resistant. Designed for grid ceiling commercial applications.

- ▶
- ▶
- ▶
- ▶


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JGL6060-33W-N	33W	595x595x54	580x580	3850lm	2.50	5PCS
JGL30120-33W-N	33W	1195x295x54	1180x280	3850lm	2.70	5PCS

CCT — 3000K 4000K 5000K 5700K

Finish — White



JPL-DF Panel light




This panel light is a frameless, transparent and 360 degree lighting design, which provides a great visual aesthetic feeling. Adopt high lumen SMD light source, the 4mm transparent PMMA LGP makes a uniform, soft lighting output and reaches anti-glare UGR<19. 6063 aluminum heat sink makes an excellent thermal management. Magnetic mounting box can also save much time for installation.

- ▶ 360° 50% IP20 UGR<19
- ▶ DIM DALI SMD SWITCH 2 in 1
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ RoHS CE


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL35120-40W-DF	40W	1200x350x19	/	4800lm	4.50	2PCS
JPL35120-40W-DF-D	40W	1200x350x19	/	4800lm	4.50	2PCS
JPL35120-60W-DF	60W	1200x350x19	/	7200lm	4.50	2PCS

CCT ——— 3000K ——— 4000K ——— 5700K

Finish ——— White

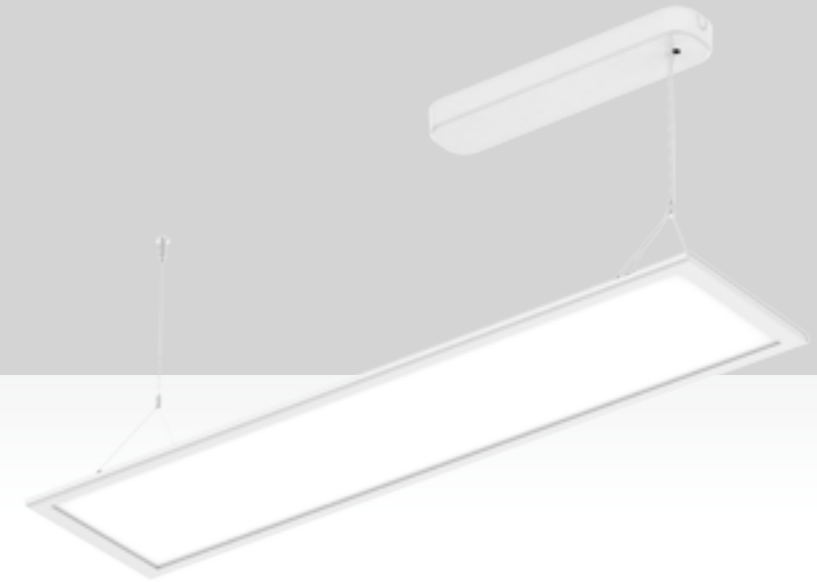

JPL-DB Panel light



JPL-DB panel light is an Up & down emitting panel with external driver, novel design without any screw make it a special and good looking panel. Besides, it is an anti-glare UGR<19 design without Prism plate, this is a new tendency for high end market. Magnetic mounting box can also save much time for installation, Triac dim and DALI dimming options.

- ▶ 110° IP20 UGR<19
- ▶ DIM DALI
- ▶ AC 220-240V PF≥0.9 CRI≥80
- ▶ RoHS CE


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL30120-30W-DB	30W	1200x300x16.5	/	3060lm	3.76	2PCS
JPL30120-40W-DB	40W	1200x300x16.5	/	4000lm	3.76	2PCS
JPL30120-50W-DB	50W	1200x300x16.5	/	4950lm	3.76	2PCS

CCT ——— 3000K ——— 4000K ——— 5000K ——— 5700K


Finish ——— White



JPL-W Panel light



JPL-W LED pendant decorative light with high quality diffuser and 3T PMMA LGP. 300mm, 400mm, 500mm, 600mm and 780mm diameter for options. Various installation ways include suspended, surface mounted and recessed.

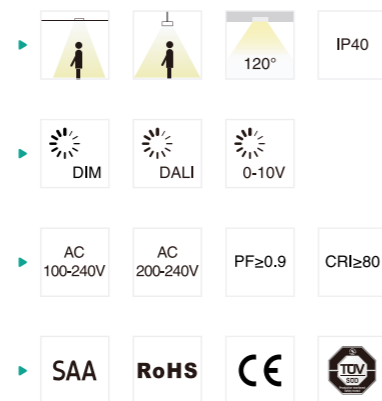


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL3012-18W-W	18W	Ø300x12	1560lm	2.50	5PCS
JPL4012-25W-W	25W	Ø400x12	2070lm	3.10	4PCS
JPL4012-35W-W	35W	Ø400x12	2900lm	3.10	4PCS
JPL5012-30W-W	30W	Ø500x12	2520lm	4.20	4PCS
JPL5012-35W-W	35W	Ø500x12	2900lm	4.20	4PCS
JPL6012-35W-W	35W	Ø600x12	3040lm	4.34	2PCS
JPL6012-45W-W	45W	Ø600x12	3600lm	4.34	2PCS
JPL8012-60W-W	60W	Ø780x20	5430lm	6.10	2PCS
JPL8012-80W-W	80W	Ø780x20	7460lm	6.90	2PCS

CCT 3000K 4000K 5000K 5700K


Finish White



JPL-DD Panel light

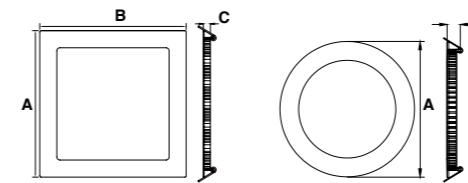

JPL-DD is small size panel with complete diameter options. 2835SMD LED chip and PMMA LGP offer a great light transmittance and light output. Adopt die-casting aluminum frame which provides a great thermal management. External driver comes with triac dim, it shares great popularity by perfect dimming range and great compatibility with worldwide dimmers. The ultra slim profile fits perfectly for all working places.

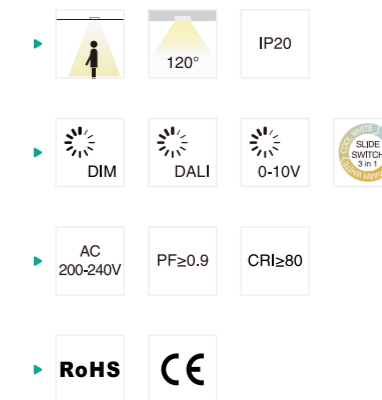

Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL1212-6W-DD	6W	120x120x21	105x105	420lm	0.24	36PCS
JPL1515-9W-DD	9W	146x146x21	127x127	750lm	0.28	24PCS
JPL1717-12W-DD	12W	171x171x21	155x155	950lm	0.34	20PCS
JPL2222-18W-DD	18W	224x224x21	205x205	1500lm	0.52	12PCS
JPL3030-24W-DD	24W	300x300x21	277x277	2000lm	0.88	12PCS
JPL1221-6W-DD	6W	Ø120x21	Ø108-113	420lm	0.20	36PCS
JPL1521-9W-DD	9W	Ø145x21	Ø127-133	750lm	0.24	24PCS
JPL1721-12W-DD	12W	Ø170x21	Ø157-162	950lm	0.29	20PCS
JPL2221-18W-DD	18W	Ø224x21	Ø205-212	1500lm	0.42	12PCS
JPL3021-24W-DD	24W	Ø300x21	Ø282-288	2000lm	0.71	12PCS

CCT 3000K 4000K 5000K 5700K 6500K

Finish White



Suspension




Surface mounted



Recessed

JPL-DR Backlit panel light

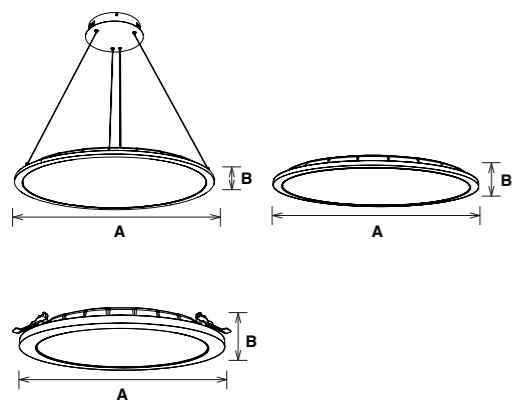

JPL-DR is a round panel with low UGR and PMMA LGP design, 300mm, 400mm, 500mm, 600mm are available, CCT switch and Sensor function provide more choices to consumers, Various installation ways include suspended, surface mounted and recessed.


- ▶ 120° 90°
- ▶ IP20 UGR<19
- ▶ DIM SLIDE SWITCH ((-))
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ RoHS CE

CCT — 3000K 4000K 5000K 5700K

Finish — White


Code	Watt	Size(AxBmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JPL-DR300-18W	18W	Ø300x32	/	2200lm	2.20	4PCS
JPL-DR300-18W	18W	Ø300x75	/	2200lm	1.95	4PCS
JPL-DR300-18W	18W	Ø300x45	Ø260-280	2200lm	1.36	4PCS
JPL-DR400-25W	25W	Ø400x32	/	3000lm	2.60	2PCS
JPL-DR400-25W	25W	Ø400x75	/	3000lm	2.35	2PCS
JPL-DR400-25W	25W	Ø400x45	Ø360-380	3000lm	1.80	2PCS
JPL-DR400-35W	35W	Ø400x32	/	4200lm	2.60	2PCS
JPL-DR400-35W	35W	Ø400x75	/	4200lm	2.35	2PCS
JPL-DR400-35W	35W	Ø400x45	Ø360-380	4200lm	1.80	2PCS
JPL-DR500-30W	30W	Ø500x32	/	3600lm	3.00	2PCS
JPL-DR500-30W	30W	Ø500x75	/	3600lm	2.70	2PCS
JPL-DR500-30W	30W	Ø500x45	Ø460-480	3600lm	2.20	2PCS
JPL-DR500-35W	35W	Ø500x32	/	4200lm	3.00	2PCS
JPL-DR500-35W	35W	Ø500x75	/	4200lm	2.70	2PCS
JPL-DR500-35W	35W	Ø500x45	Ø460-480	4200lm	2.20	2PCS
JPL-DR600-35W	35W	Ø600x32	/	4200lm	3.50	2PCS
JPL-DR600-35W	35W	Ø600x75	/	4200lm	3.20	2PCS
JPL-DR600-35W	35W	Ø600x45	Ø560-580	4200lm	2.60	2PCS
JPL-DR600-45W	45W	Ø600x32	/	5400lm	3.50	2PCS
JPL-DR600-45W	45W	Ø600x75	/	5400lm	3.20	2PCS
JPL-DR600-45W	45W	Ø600x45	Ø560-580	5400lm	2.60	2PCS
JPL-DR600-60W	60W	Ø600x32	/	7200lm	3.50	2PCS
JPL-DR600-60W	60W	Ø600x75	/	7200lm	3.20	2PCS
JPL-DR600-60W	60W	Ø600x45	Ø560-580	7200lm	2.60	2PCS

Panel Light installation accessories

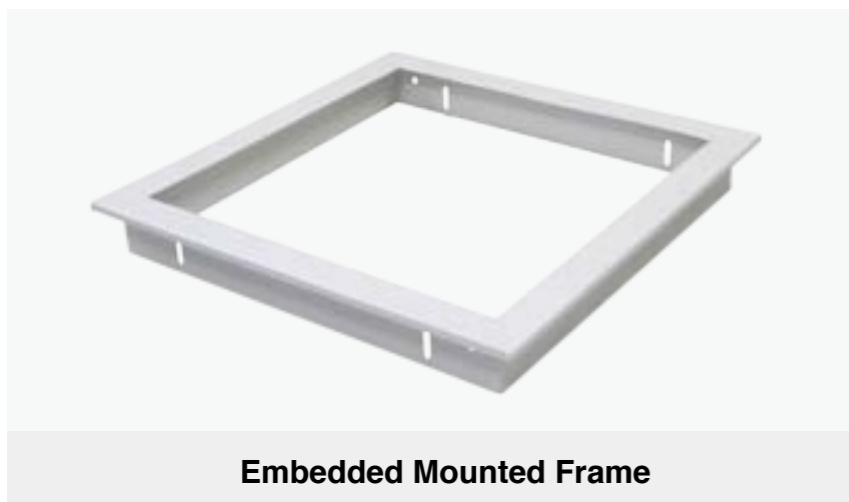



JOL02 LED freestanding luminaire

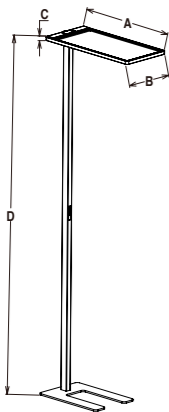

This JOL02 freestanding lamp is composed of three parts: flat lamp body, lamp pole and lamp base. With a precise optical design (UGR<16, up 70% & down 30% lighting), it can ensure a more uniform and more comfortable lighting effect. Lamp Pole with: Plug, touchable 0-10V dimmer, light sensor and PIR sensor module.


- ▶ 120°
 120°
 UGR<16
- ▶ 0-10V
- ▶ AC 220-240V PF≥0.93 CRI≥80
- ▶

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
JOL02-75W-DOS	75W	720x340x21.5x1925	6800lm	Flat lamp body:2.70 Lamp pole:3.10 Lamp base:6.70	6PCS 6PCS 3PCS

CCT 3000K 4000K

Finish White

- Indirect lighting and direct lighting (500-700LUX on the desk)
- PMMA LGP with Prismatic diffuser to achieve UGR<16 ideal for office lighting.

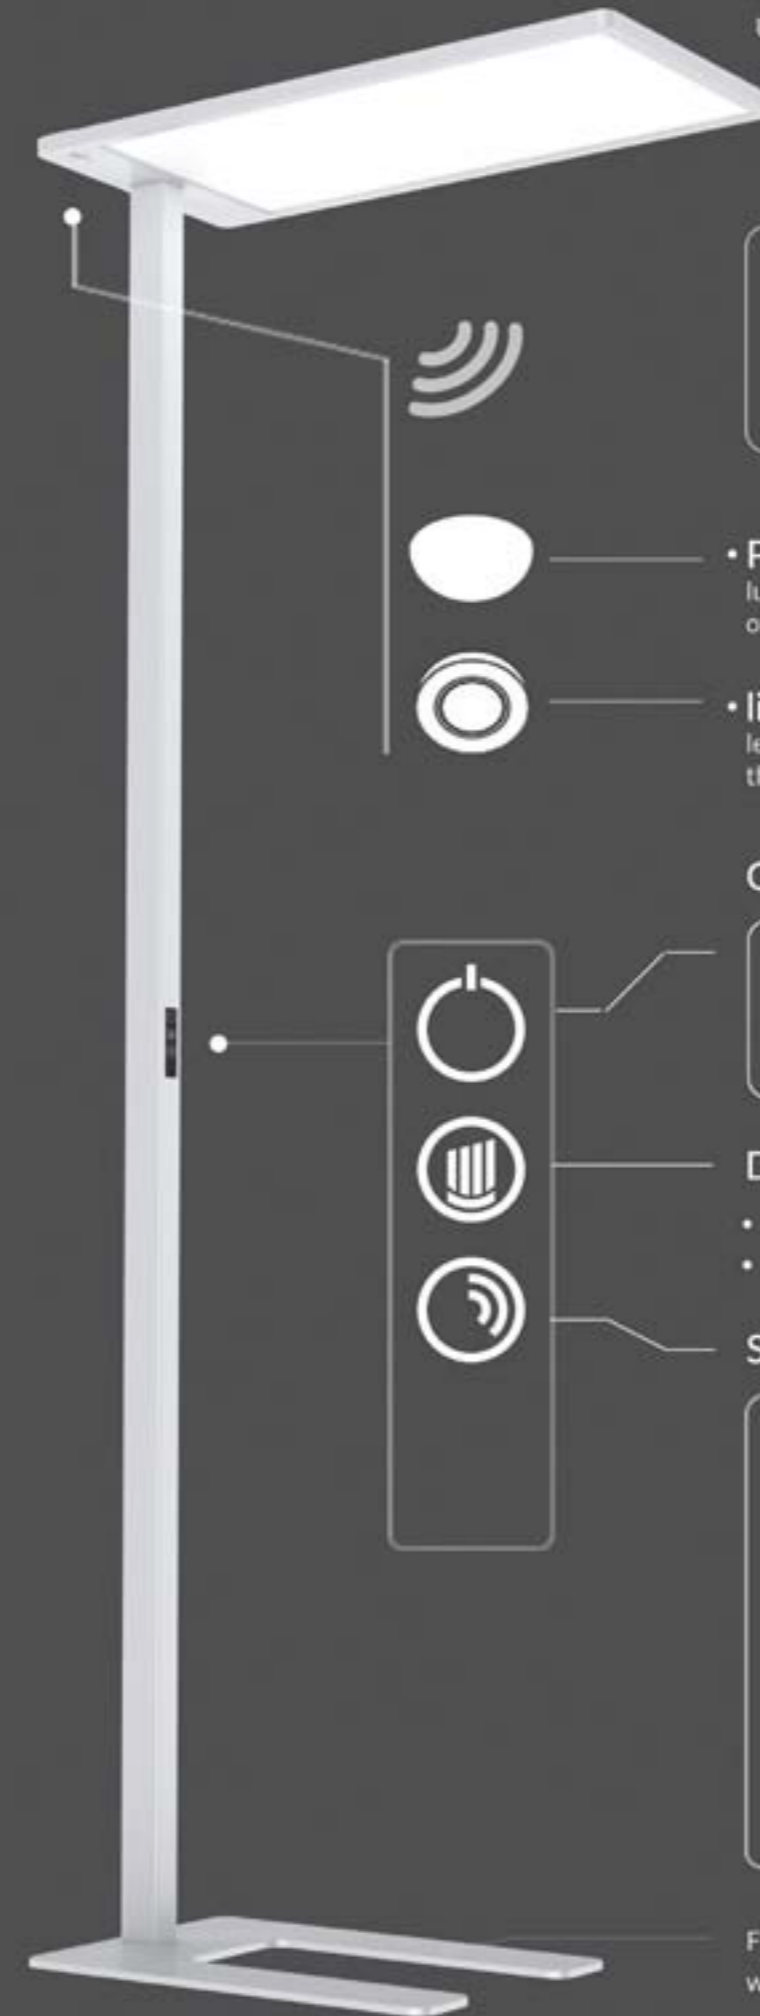

STATUS

					ON
					OFF

- **PIR sensor** detector automatically switches the luminaire on and then switches it off when there is no one in the room.
- **light sensor** continuously measures the illuminance level on the desk and dims the light itself depending on the amount of available daylight and artificial lighting.

ON/OFF

3s	Factory setting: Dimming 50%Light, sensor and PIR sensor in ON status.	1s	Turn ON/OFF
----	--	----	-------------

Dimming button

- Short press in 1s, brightness will increase/ decrease 5%
- Long press brightness will increase/ decrease continually

Sensor

	>	x1	>					
	>	x2	>					
	>	x3	>					

Flat lamp base with reliable stability? saving space and widely work with office furniture