

# Airpura AIR PURIFIERS



## T600DLX SPECIFIC CHEMICALS - VOCS SPECIFIC CHEMICALS - VOCS

THE AIRPURA T600DLX  
Available in White / Black / Cream

THE AIRPURA LIMITED WARRANTY  
5 years parts / 10 years labor

### THE AIRPURA T600DLX ENHANCED CHEMICAL ABATEMENT UNIT OFFERS YOU:

- ▶ **26 LB ENHANCED IMPREGNATED ACTIVATED CARBON BED** Adsorbs airborne chemicals including volatile organic compounds (VOCs)
- ▶ **HEPA-BARRIER POST FILTER** Traps particles after the carbon bed.
- ▶ **560 CFM INTEGRATED FAN / MOTOR** Largest CFM available in a portable unit.
- ▶ **VARIABLE SPEED CONTROL** Gives you flexible air flow options
- ▶ **PROPER DWELL TIMES FOR EFFECTIVE FILTRATION** Correctly calibrated air flow / bed depth for efficient adsorption.
- ▶ **CALL OUR AIR QUALITY EXPERTS** For the solution to your air pollution problem.

### OVER 4000 CHEMICALS CAN BE REMOVED

Carbon blends are available to deal with over 4000 airborne chemicals including:

- |                  |                    |
|------------------|--------------------|
| Ammonias         | Hydrogen fluoride  |
| Nitrous dioxide  | Hydrogen chloride  |
| Nitrous trioxide | Benzene            |
| Monoethylamine   | Methylene Chloride |
| Hexane           | Radioactive Iodine |
| Hydrogen Sulfide | Toulene            |
| Mercury vapors   | Napthene           |
| Chlorine dioxide | Pesticides         |
| Hydrogen Bromide | Chlorine           |
| Sulfur dioxide   | Mold Mycotoxins    |

#### FILTER LIFE

**Carbon filters** should be changed as needed in heavy applications and at least every 24 months in normal use. Airpura carbon canisters are refillable to save costs


**HEPA Barrier filters** should be changed every 12 months

**TarBarrier prefilters** replaced 3-6 months depending on use.

PROTECT YOURSELF WITH AIRPURA HIGH EFFICIENCY AIR PURIFICATION



## FILTRATION SYSTEM

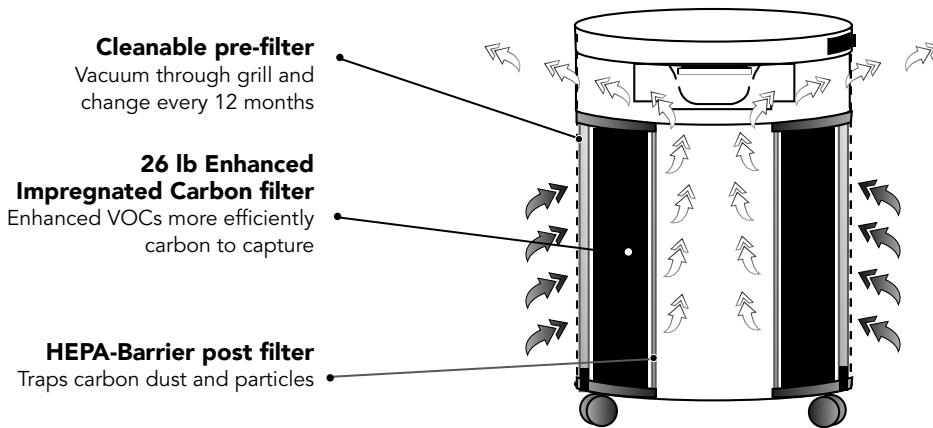

**Cleanable pre-filter**  
Vacuum through grill and change every 12 months

**26 lb Enhanced Impregnated Carbon filter**  
Enhanced VOCs more efficiently carbon to capture

**HEPA-Barrier post filter**  
Traps carbon dust and particles

## SPECIALLY DESIGNED TO REMOVE SPECIFIC AIRBORNE CHEMICALS AND VOCS

**DWELL TIME** For best results the correct dwell time of the pollutants over the enhanced impregnated carbon bed is vital. The 560 CFM impeller/motor combined with the variable speed control and unimpeded airflow of the Airpura 600 series allows you to set the airflow precisely and achieve the results you need.

**Expertise you can call on** Airpura air quality experts can offer you a solution to most airborne chemical problems. Contact your Airpura dealer or call us directly to discuss your needs.

## UNIQUE FEATURES

- ▶ **ALL METAL HOUSING** ensures no plastic vapors are emitted.
- ▶ **MOTOR OUT OF THE AIR FLOW.** Most air purifiers blow the clean air over the motor and pick up impurities.
- ▶ **ELECTRICAL PARTS IN A SEALED CHAMBER OUT OF THE AIRFLOW.** Increases safety and prevents off-gassing
- ▶ **PRESSURE SEALED FILTER CHAMBER** prevents leakage of polluted air around filters.
- ▶ **FELT GASKETS SEAL THE FILTER CHAMBER.** Maximize filtration with no rubber off-gassing found with other filters.
- ▶ **CLEAN MODERN APPEARANCE** fits in any decor.
- ▶ **LOW NOISE LEVEL** (at 6 feet) 28.1db on low 62.3db on high (560 cfm).

## TECHNICAL SPECIFICATIONS

### ODOR, AIRBORNE CHEMICAL AND VOC CONTROL

26 lbs super enhanced activated carbon  
13"H x 13.25"OD x 7.5"ID

### CARBON BED

3" deep x 570 sq" surface

### TAR REMOVAL

Special Tar-Barrier filter  
570 sq in x 1 in deep

### PARTICLE SUPPRESSION

Post particle filter  
306 sq in

### AIR FLOW 560 CFM

More cfm than any other compact unit available

### HOUSING

Powder coated steel

### SIZE

23" x 15"

### WEIGHT

49 lbs total

### VOLTAGE OPTIONS

115 or 220 volts

### WATTS

120 on high / 40 on low

### SOUND LEVEL

28.1 db on low (at 6 feet)  
62.3 db on high (560 cfm)  
(Room level 25.1 db)

### ETL CERTIFIED

Conforms to CSA C22.2 no 113 ANSI / UL 507

YOUR AIRPURA™ DEALER

