


# Power and General Wiring Cables



These are general purpose cables which find most common use in electrical power distribution and control circuits .

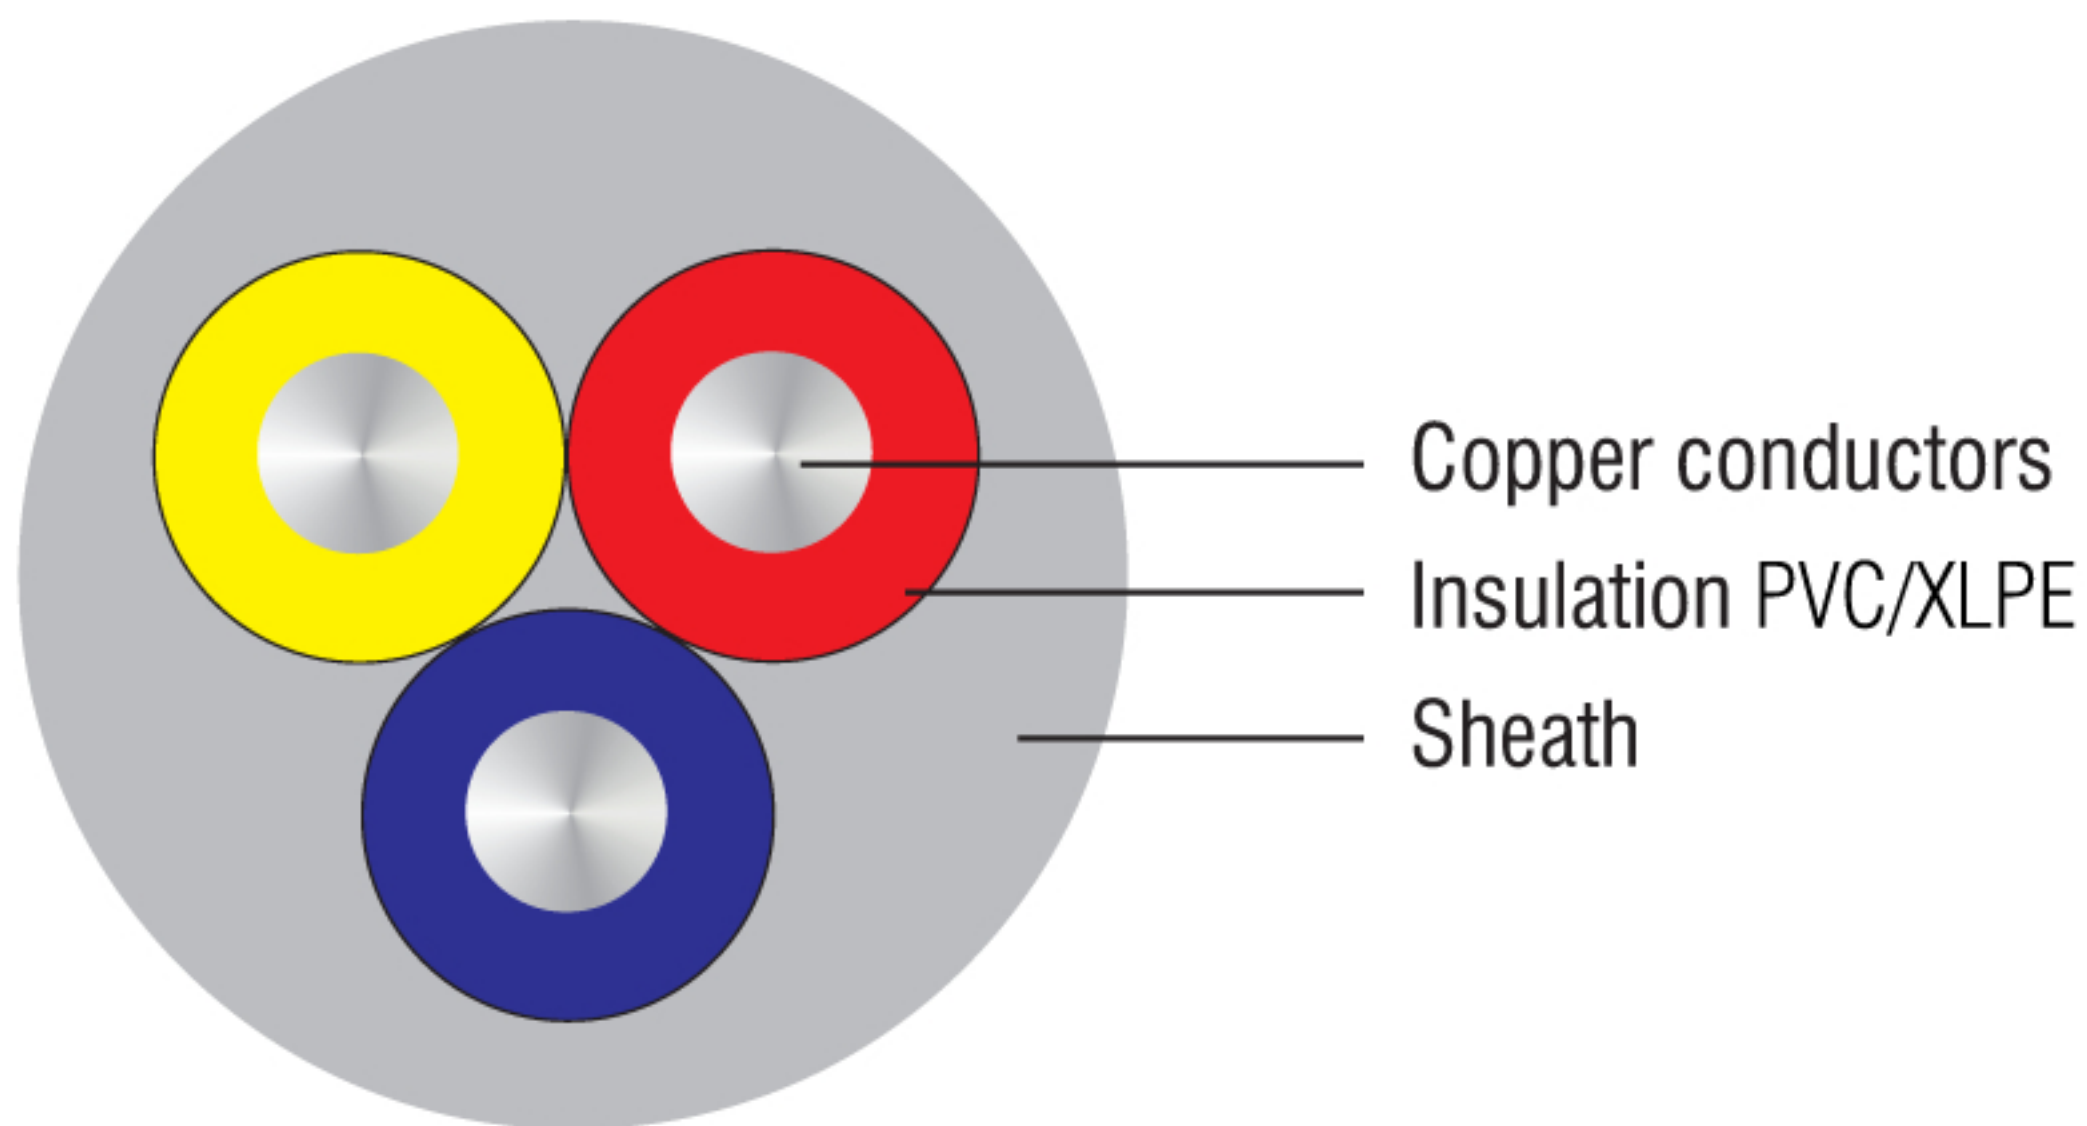

## Technical Data

Insulation resistance	< 100M $\Omega$ /km
Operating voltage	Up to 1100 V
Testing voltage	3000 V at rms 50 Hz 1 min
Temperature range	during operation -20°C to 105°C

## Salient Features

- Single core and multicore cables 600 V/1000 V.
- Bare copper or Tinned copper, sizes up to 50 sq. mm
- Insulation of PVC/XLPE.
- Flame retardant, Low smoke cables.
- Cables conforming to IEC 60502, BS 6004, VDE 0281-3 and European Harmonised standards.
- RoHS compliant.