

Kabelverschraubungen / Cable Glands

wege® K Standard Spiral


Material	PA 6.6	material	PA 6.6
Farbe	tiefschwarz (RAL 9005)	colour	jet black (RAL 9005)
Dichtring	CR	sealing ring	CR
Schutzklasse	IP66/ IP68 - 5 bar	protection class	IP66/ IP68 - 5 bar
Prüfnorm*	UL 514B	test standard*	UL 514B
Zugentlastung	DIN EN 62444 Tab. 2A	strain relief	DIN EN 62444 Tab. 2A
Temperaturbereich	-20 °C bis +90 °C	range of temperature	-20 °C to +90 °C

Gewinde thread			H	L		Bestell-Nr. ref.-number
-------------------	--	--	---	---	--	----------------------------

kurzes Anschlussgewinde / short connection thread						
M 12 x 1,5	3,5 – 7	15	57	8	100	347.1200.3
M 16 x 1,5	5 – 10	19	79	8	50	347.1600.3
M 20 x 1,5	7 – 13	25	90	9	25	347.2000.3
M 25 x 1,5	10 – 17	30	120	10	20	347.2500.3
M 32 x 1,5	13 – 21	36	140	10	10	347.3200.3

Pg 7	3,5 – 7	15	57	8	100	344.0700.3
Pg 9	5 – 8	19	68	8	100	344.0900.3
Pg 11	5 – 10	22	80	8	50	344.1100.3
Pg 13,5	7 – 12	24	90	10	50	344.1300.3
Pg 16	10 – 14	27	100	10	25	344.1600.3
Pg 21	13 – 18	33	112	12	20	344.2100.3

G 1/4"	3 – 6,5	15	57	8	100	345.0014.3
G 3/8"	4 – 8	19	68	9	100	345.0038.3
G 1/2"	7 – 12	24	90	10	50	345.0012.3
G 3/4"	13 – 18	33	112	12	20	345.0034.3

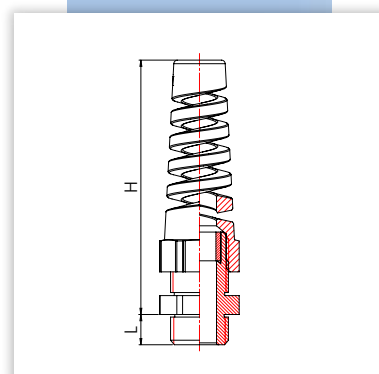

*Details zu den Prüfungen finden Sie im technischen Anhang ab Seite 106/107

Details of the tests can be found in the technical appendix from page 106/107