


CPSS

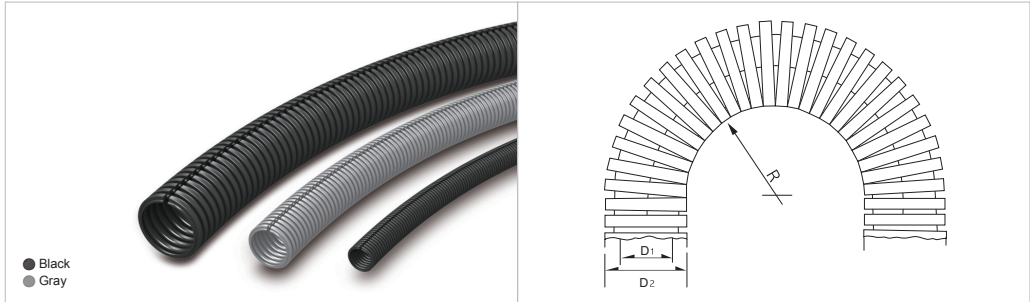

- Material : High Quality Polyamide 6
- Construction : Inside & Outside Corrugated Plastic Hose
- Temperature : -40°C ~ +105°C
- Short Term : +130°C
- Self-Extinguishing : UL94-HB
- Color : Black, Gray
- Connections : CPSFIX
- Application : Machinery
- International Specification : RoHs2, CE

Product Size

Black	Gray	Inner Diameter (D1)	Outer Diameter (D2)	Bending Radius(R) mm1 ± 0%	Packing meter / roll
CPSS-07B	CPSS-07G	6.4	10.0	15.0	50/100
CPSS-10B	CPSS-10G	9.6	13.0	20.0	50
CPSS-12B	CPSS-12G	11.8	15.8	30.0	50
CPSS-16B	CPSS-16G	15.9	21.2	40.0	50
CPSS-22B	CPSS-22G	21.7	28.5	45.0	50
CPSS-28B	CPSS-28G	27.8	34.5	55.0	50
CPSS-36B	CPSS-36G	36.0	42.5	60.0	30
CPSS-48B	CPSS-48G	46.5	54.5	70.0	30
CPSS-56B	CPSS-56G	56.3	67.2	110.0	30
CPSS-70B	CPSS-70G	70.0	82.5	160.0	10
CPSS-95B	CPSS-95G	91.5	106.0	210.0	10