

# Majvest® 500 SA

**SELF-ADHERED VAPOR PERMEABLE WATER-RESISTIVE BARRIER AND AIR BARRIER MEMBRANE**



## **ELIMINATE fasteners and ELEVATE the air-sealing PERFORMANCE & WIND-LOAD resistance of your WRB.**

Majvest 500 SA is a fully-adhered 3-ply, microporous membrane, designed for use as a long-lasting water-resistant barrier (WRB) and air-barrier (AB) component in commercial and residential buildings.

Primer-free adhesion to most common building materials, including concrete, plywood, gypsum, and metal. Reliably sticky in cold temperatures thanks to SIGA's proprietary acrylic adhesive technology. For above-grade wall applications.

### CHARACTERISTICS


ROLL DIMENSIONS	60" x 100' 18" x 100'
THICKNESS	28 mils
MAXIMUM UV EXPOSURE (IECC Climate Zones 3-8)	6 months
WATER VAPOR TRANSMISSION (ASTM E96 Method A / Dry-Cup)	16 US perms
MINIMUM RECOMMENDED INSTALLATION TEMPERATURE	14°F (-10°C)

- ✓ High adhesive strength at high and low temperatures, sticks in all seasons
- ✓ No primer required, fast and clean application
- ✓ Tear-resistant release liner with a 50/50 split, easy to remove



air barrier  
**abaa**  
association of  
america

# INSTALLATION INSTRUCTIONS

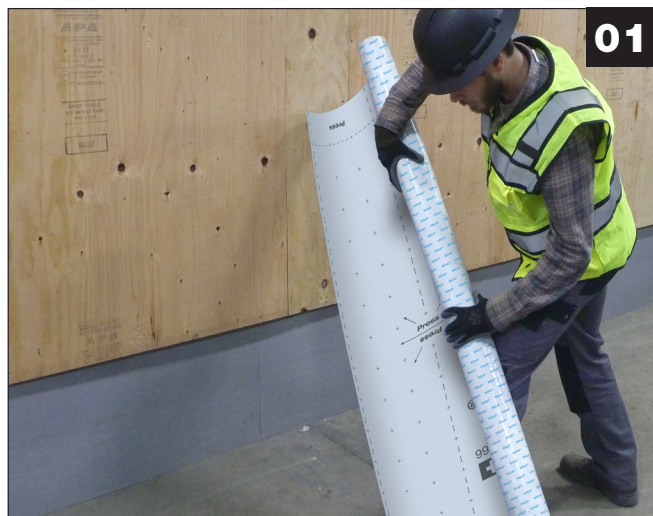

- Pre-cut material to length, before adhering to the wall. Favor shorter, square pieces
- Markings are printed every 4" and 12" for tool-free measuring
- Back-roll onto itself (with release film facing outward) for easiest handling



- Establish level course height using pencil marks or chalkline, or by using overlap guide on previous course
- Ensure 4" minimum horizontal and vertical overlap, aided by factory-printed grid and overlap guides
- Peel back upper corner of release liner and position onto wall at leveling mark



- Gradually peel off release liner while applying flat to wall, maintaining level
- Smooth from centers out, to minimize wrinkling and air bubbles



- Remove release liner from bottom half and smooth onto wall
- Apply heavy pressure to entire surface using SIGA Squeegee (shown) or counter-top roller

All SIGA products are backed by a 10-year limited warranty. Reference [siga.swiss](http://siga.swiss) for complete details. We want you to maximize the performance potential of Majvest 500 SA on your project. Contact one of our Application Advisors for assistance, from architectural details to jobsite training.