



# Thermafiber® RainBarrier™ 45

## Mineral Wool Continuous Insulation

### PRODUCT FEATURES

#### Description

Mineral wool semi-rigid continuous insulation with fire resistive, acoustic and moisture resistive properties.

#### Basic Uses/Related Uses

Continuous insulation for use on exterior above grade rainscreen and cavity wall construction applications. Suitable for use with common z-girt, wall-tie and clip cladding attachment solutions with open or closed joint facades.

#### Selection Criteria

- Non-combustible, non-deteriorating, and inorganic
- Repels and efficiently drains water
- Highly UV resistant

- Helps conserve energy, reduce greenhouse gas emissions
- Fire resistant to temperatures above 1,093° C (2,000° F)
- Enhances acoustical performance
- Compatible with common wall ties, clip systems and air/moisture barriers

#### Sustainability Criteria

- Recycled content minimum 70%, standard fiber
- Bronze Material Health Certificate from Cradle to Cradle
- Contributes to credits in several green building programs such as LEED® and Green Globes®
- For more information see Environmental Product Declaration (EPD) certified by UL Environment via [www.thermafiber.ca/sustainability](http://www.thermafiber.ca/sustainability)

#### Applicable Standards

<b>CAN/ULC-S702</b>	Standard for Mineral Fibre Thermal Insulation for Buildings
<b>ASTM C665</b>	Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
<b>ASTM C612</b>	Standard Specification for Mineral Fiber Block and Board Thermal Insulation
<b>ASTM C518</b>	Standard Test Method for Steady-State Thermal Transmission Properties by Means of the Heat Flow Meter Apparatus
<b>CAN/ULC-S114</b>	Standard Method of Test for Determination of Non-combustibility in Building Materials
<b>ASTM E136</b>	Standard Test Method for Behavior of Materials in a Vertical Tube Furnace at 750°C
<b>CAN/ULC-S129</b>	Standard Method of Test for Smoulder Resistance of Insulation (Basket Method)
<b>CAN/ULC-S102</b>	Standard Method of Test for Surface Burning Characteristics of Building Materials and Assemblies
<b>ASTM E84</b>	Standard Test Method for Surface Burning Characteristics of Building Materials
<b>ASTM C1104</b>	Standard Test Method for Determining the Water Sorption of Unfaced Mineral Fiber Insulation
<b>ASTM E96</b>	Standard Test Methods for Water Vapor Transmission of Materials
<b>ASTM C1338</b>	Standard Test Method for Determining Fungi Resistance of Insulation Materials and Facings
<b>ASTM C795</b>	Standard Specification for Thermal Insulation for Use in Contact with Austenitic Stainless Steel
<b>ASTM C423</b>	Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method

#### Performance Criteria

<b>Compliance</b>	Evaluation Listing No. 14060-L Type I Type I Type IA, IB, IVA	CCMC CAN/ULC-S702 ASTM C665 ASTM C612																																								
<b>Density</b>	72 kg/m <sup>3</sup> (4.5 lbs/ft <sup>3</sup> )	Actual																																								
<b>Thermal</b>	RSI value/25.4 mm @ 24 °C    0.74 m <sup>2</sup> *K/W R-value/inch @ 75 °F        4.2 hr*ft <sup>2</sup> *°F/Btu	ASTM C518																																								
<b>Fire</b>	Non-Combustible Non-Combustible Smoulder Resistance Mean Mass Loss ≤ 0.02% Flame Spread 0; Smoke Developed 0 Flame Spread 0; Smoke Developed 0	CAN/ULC-S114 ASTM E136 CAN/ULC-S129 CAN/ULC-S102 ASTM E84																																								
<b>Moisture</b>	Moisture Absorption 0.03% by volume Water Vapour Transmission 2850 ng/Pa.s.m <sup>2</sup> (50 Perms) Fungi Resistance - Pass	ASTM C1104 ASTM E96 ASTM C1338																																								
<b>Corrosion</b>	Austenitic Steel - Non-corrosive Steel, Aluminum & Copper - Non-corrosive	ASTM C795 ASTM C665																																								
<b>Acoustic</b>	<table border="1"> <thead> <tr> <th>Thickness</th> <th>125 Hz</th> <th>250 Hz</th> <th>500 Hz</th> <th>1000 Hz</th> <th>2000 Hz</th> <th>4000 Hz</th> <th>NRC</th> </tr> </thead> <tbody> <tr> <td>38 mm (1½")</td> <td>0.22</td> <td>0.44</td> <td>0.96</td> <td>1.06</td> <td>1.05</td> <td>1.05</td> <td>0.90</td> </tr> <tr> <td>51 mm (2")</td> <td>0.30</td> <td>0.69</td> <td>1.08</td> <td>1.01</td> <td>1.00</td> <td>1.03</td> <td>0.95</td> </tr> <tr> <td>76 mm (3")</td> <td>0.70</td> <td>1.07</td> <td>1.24</td> <td>1.13</td> <td>1.07</td> <td>1.08</td> <td>1.15</td> </tr> <tr> <td>102 mm (4")</td> <td>1.03</td> <td>1.25</td> <td>1.20</td> <td>1.05</td> <td>1.05</td> <td>1.08</td> <td>1.15</td> </tr> </tbody> </table>	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC	38 mm (1½")	0.22	0.44	0.96	1.06	1.05	1.05	0.90	51 mm (2")	0.30	0.69	1.08	1.01	1.00	1.03	0.95	76 mm (3")	0.70	1.07	1.24	1.13	1.07	1.08	1.15	102 mm (4")	1.03	1.25	1.20	1.05	1.05	1.08	1.15	ASTM C423
Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC																																			
38 mm (1½")	0.22	0.44	0.96	1.06	1.05	1.05	0.90																																			
51 mm (2")	0.30	0.69	1.08	1.01	1.00	1.03	0.95																																			
76 mm (3")	0.70	1.07	1.24	1.13	1.07	1.08	1.15																																			
102 mm (4")	1.03	1.25	1.20	1.05	1.05	1.08	1.15																																			

#### Sizes

Thickness <sup>†</sup>	Widths	Lengths
25 mm (1") - 178 mm (7")	406 mm (16") 610 mm (24") 914 mm (36")	1219 mm (48") 1524 mm (60")


<sup>†</sup>Available in 12.7 mm (1/2") increments





# Thermafiber® RainBarrier™ 45

## Mineral Wool Continuous Insulation

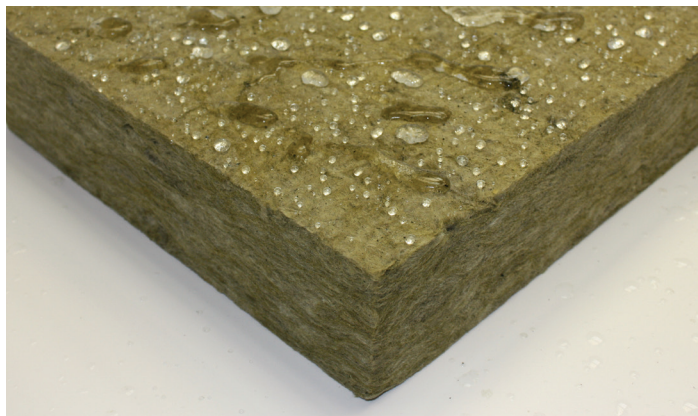

### Quality Statement, Tests, Certifications, and Approvals

Recycled content verified by ICC-ES.

### Delivery and Storage

Deliver products in their original packages, and store in enclosed shelter.

### Limitations

If insulation is going to be left exposed for long durations prior to cladding installation, with extended exposure to the elements, consider installing higher density Thermafiber® RainBarrier™ HD Continuous Insulation. Packaging is not UV resistant. Shelter unused packages from the elements.

### Safety

Contact with mineral wool may cause temporary eye and skin irritation. Wear eye protection and long-sleeved loose fitting clothing closed at the neck and wrists. For additional information refer to the Safe Use Instruction Sheet (SUIS) found in the SDS Database via <http://sds.owenscorning.com>.

### Availability/Cost

Contact Owens Corning local Area Sales Manager. See ASM territory map via [www.thermafiber.ca/contact](http://www.thermafiber.ca/contact).

### PRODUCT PROPERTIES

#### Materials

Mineral wool, Type I (to CAN/ULC-S702), non-combustible (to CAN/ULC-S114), non-corrosive (to ASTM C665).

### PRODUCT PLACEMENT

#### Installation

- Install in accordance with Thermafiber® RainBarrier™ Insulation Installation Guide.
- Locate mechanical fasteners minimum 51 mm (2") from edge of insulation.
- Cut insulation with a serrated knife.

### Technical Services Available

For Canadian Thermafiber® Technical inquiries please contact Matthew Schiedel: [matthew.schiedel@owenscorning.com](mailto:matthew.schiedel@owenscorning.com) or at 1-844-304-1623



Current Ed: 2018-09-01  
Previous Ed: 2017-05-01



### Disclaimer of Liability

Thermafiber, Inc. shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Thermafiber, Inc. liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing within thirty (30) days from date it was or reasonably should have been discovered.

LEED® is a registered trademark of the U.S. Green Building Council.  
Green Globes® is a registered trademark of Green Building Initiative, Inc.

**THERMAFIBER, INC.**  
ONE OWENS CORNING PARKWAY  
TOLEDO, OHIO, USA 43659  
**1-800-GET-PINK®**  
**[www.thermafiber.ca](http://www.thermafiber.ca)**

Pub. No. 600000A Printed in Canada. September 2018.  
THE PINK PANTHER™ & © 1964–2018 Metro-Goldwyn-Mayer Studios Inc.  
All Rights Reserved. The colour PINK is a registered trademark of Owens Corning.  
© 2018 Owens Corning. All Rights Reserved. © 2018 Thermafiber, Inc.  
All Rights Reserved.

