

# CIRCA TABLE

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Table

## LIGHT SOURCE

LED Flat-Panel

## PRODUCT CODES

Circa Table (Graphite):	CIRC TBL GPT
Circa Table (White):	CIRC TBL WHT

## LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

## FEATURES

- 360° shade rotation
- 45° shade tilt in two directions
- USB charging port
- Ships flat-packed

## SPECIFICATIONS

- Voltage: 120 or 220V 50-60Hz
- Power Consumption: 8.7W
- Color temperature: 2700K
- Luminosity: 800 Lumens
- Luminaire efficacy: 92 Lumens/Watt
- Color Rendition Index: 90 CRI
- ADA compliant
- Title 20 compliant
- 50K hour lifespan
- Cord length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

## CERTIFICATIONS



## PACKAGING WEIGHT AND DIMENSIONS

Circa Table :	8.45LBS 15" X 14" X 4"
	3.8KGS 38cm X 36cm X 10cm

## NOTES

Custom requests can be considered on volume orders




## FINISHES



## DIMENSIONS

### CIRCA TABLE

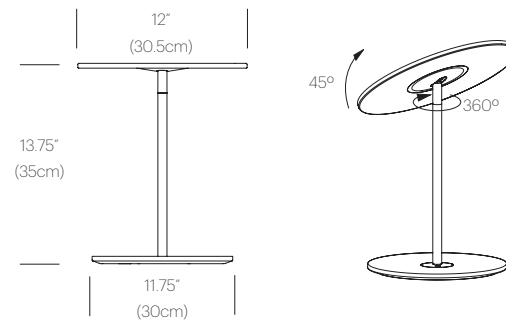

# CIRCA GROMMET

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Table (Grommet)

## LIGHT SOURCE

LED Flat Panel

## PRODUCT CODES

Circa Table Grommet Graphite:	CIRC-GROM-GPT
Circa Table Grommet White:	CIRC-GROM-WHT

## LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

## FEATURES

360° shade rotation  
45° shade tilt in two directions  
USB charging port  
Ships flat-packed

## SPECIFICATIONS

Voltage: 120 or 220V 50-60Hz  
Power Consumption: 8.7W  
Color temperature: 2700K  
Luminosity: 800 Lumens  
Luminaire efficacy: 92 Lumens/Watt  
Color Rendition Index: 90 CRI  
ADA compliant  
Title 20 compliant  
50K hour lifespan  
Cord length: 8' (244cm)  
Global multi-plug adapter available  
1 year warranty

## CERTIFICATIONS



## PACKAGING WEIGHT AND DIMENSIONS

Circa Grommet :	8.45 LBS	14" X 15" X 4"
	3.8 KGS	38cm X 36cm X 10cm

## NOTES


Custom requests can be considered on volume orders



## FINISHES



## DIMENSIONS

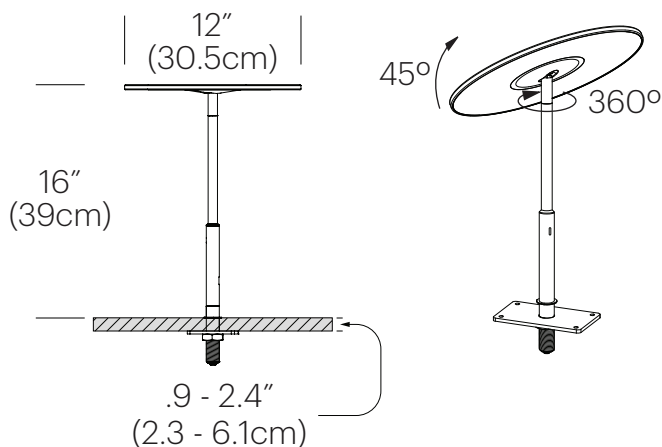

# CIRCA FLOOR

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Floor

## LIGHT SOURCE

LED Flat-Panel

## PRODUCT CODES

Circa Floor (Graphite):	CIRC FLR GPT
Circa Floor (White):	CIRC FLR WHT
Circa Floor+Ped. (Graphite):	CIRC FLR PED GPT
Circa Floor+Ped. (White):	CIRC FLR PED WHT

## LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

## FEATURES

- 360° shade rotation
- 45° shade tilt in two directions
- USB charging port
- Ships flat-packed

## SPECIFICATIONS

- Voltage: 120V or 240V 50-60Hz
- Power Consumption: 11.5W
- Color temperature: 2700K
- Luminosity: 800 Lumens
- Luminaire efficacy: 70 Lumens/Watt
- Color Rendition Index: 90 CRI
- ADA compliant
- Title 20 compliant
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

## CERTIFICATIONS



## PACKAGING WEIGHT AND DIMENSIONS

Circa Floor:	21.9LBS	29" X 18" X 3.5"
	9.9KGS	74cm X 46cm X 9cm
Circa Floor Pedestal:	2.85LBS	11" X 11" X 3"
	1.3KGS	28cm X 28cm X 8cm

## NOTES

Custom requests can be considered on volume orders



## FINISHES




WHITE




GRAPHITE

## DIMENSIONS

CIRCA FLOOR

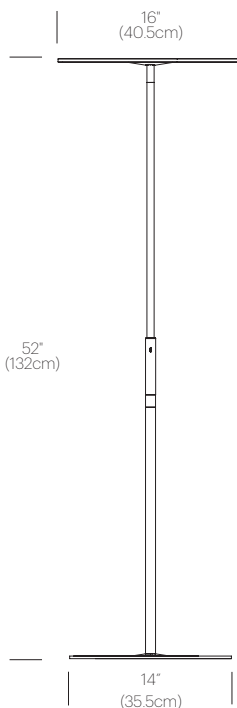

CIRCA FLOOR+PEDESTAL

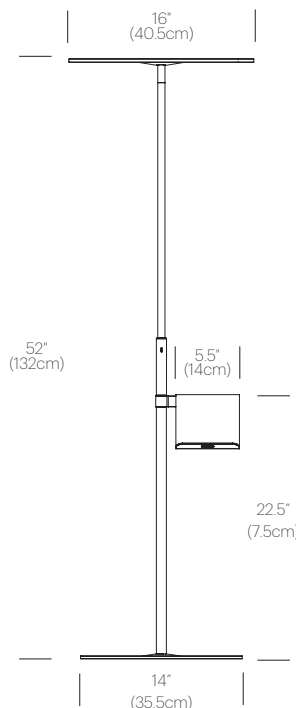

# CIRCA WALL

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Wall

## LIGHT SOURCE

LED Flat-Panel

## PRODUCT CODES

Circa Wall 12 Graphite:	CIRC WAL 12 GPT
Circa Wall 12 White:	CIRC WAL 12 WHT
Circa Wall 16 Graphite:	CIRC WAL 16 GPT
Circa Wall 16 White:	CIRC WAL 16 WHT

## LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

## FEATURES

- 360° shade rotation
- 45° shade tilt in two directions
- USB charging port
- Ships flat-packed

## SPECIFICATIONS

- Voltage: 120 or 240V 50-60Hz
- Power Consumption: 8.7W (12) 10.8W (16)
- Color temperature: 2700K
- Luminosity: 800 Lumens (12) 800 Lumens (16)
- Luminaire efficacy: 92 Lumens/Watt (12) 74 L/W (16)
- Color Rendition Index: 90 CRI
- ADA compliant
- Title 20 compliant
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

## CERTIFICATIONS



## PACKAGING WEIGHT AND DIMENSIONS

Circa Wall 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Wall 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

## NOTES

Custom requests can be considered on volume orders



## FINISHES




WHITE


GRAPHITE

## DIMENSIONS

CIRCA WALL 12



CIRCA WALL 16



# CIRCA FLUSH

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Wall/Ceiling

## LIGHT SOURCE

LED Flat-Panel

## PRODUCT CODES

Circa Flush Direct 12 Graphite:	Special order only
Circa Flush Direct 12 White:	Special order only
Circa Flush Direct 16 Graphite:	Special order only
Circa Flush Direct 16 White:	CIRC FSH 16 WHT
Circa Flush Indirect 12 Graphite:	Special order only
Circa Flush Indirect 12 White:	Special order only
Circa Flush Indirect 16 Graphite:	Special order only
Circa Flush Indirect 16 White:	Special order only

## LIGHT CONTROL

Hard Wired (Triac transformer)  
ELV dimmer recommended

## FEATURES

Ships flat-packed

## SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz  
Power Consumption: 10.5W  
Color temperature: 2700K  
Luminosity: 800 Lumens  
Luminaire efficacy: 76 Lumens/Watt  
Color Rendition Index: 90 CRI  
Title 20 compliant  
ADA compliant  
50K hour lifespan  
1 year warranty

## CERTIFICATIONS



## PACKAGING WEIGHT AND DIMENSIONS

Circa Flush 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Flush 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

## NOTES

Custom requests can be considered on volume orders




## FINISHES





## DIMENSIONS

CIRCA FLUSH 12

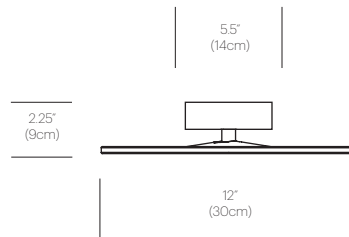

CIRCA FLUSH 16

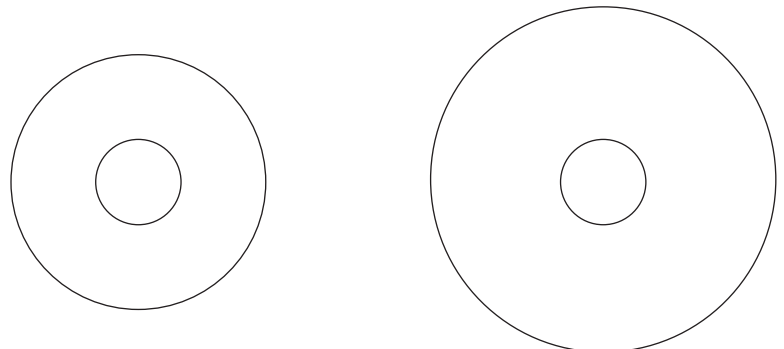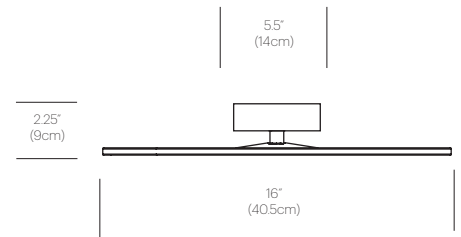

# CIRCA PENDANT

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Pendant

## LIGHT SOURCE

LED Flat-Panel

## PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT

## LIGHT CONTROL

Hard wired (Triac transformer) full range dim  
ELV dimmer recommended

## FEATURES

360° shade rotation  
45° shade tilt in two directions  
Ships flat-packed

## SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz  
Power Consumption: 10.5W  
Color temperature: 2700K  
Luminosity: 800 Lumens  
Luminaire efficacy: 76 Lumens/Watt  
Color Rendition Index: 90 CRI  
Title 20 compliant  
50K hour lifespan  
Cable length: 10' (305cm) (Field Cuttable)  
1 year warranty

## CERTIFICATIONS



## PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

## NOTES

Custom requests can be considered on volume orders



## FINISHES




WHITE




GRAPHITE

## DIMENSIONS

CIRCA PENDANT 12

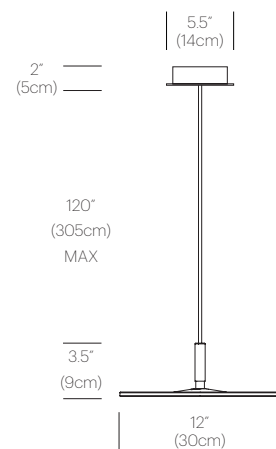

CIRCA PENDANT 16

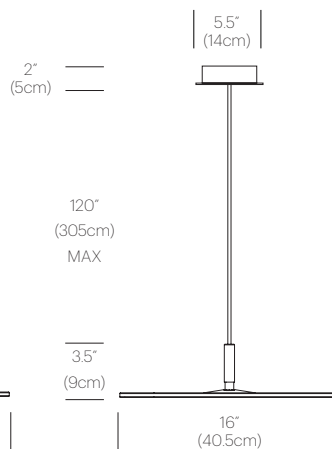

# CIRCA CHANDELIER

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa Chandelier is available in 3, 5, and 7 lamp configurations to fit a wide range of commercial and residential environments.

## FIXTURE TYPE

Pendant

## LIGHT SOURCE

LED Flat-Panel

## PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT
17" Chandelier Canopy:	CHND CAN 17
26" Chandelier Canopy:	CHND CAN 26

## LIGHT CONTROL

Hard wired (Triac transformer) full range dim  
ELV dimmer recommended

## FEATURES

360° shade rotation  
45° shade tilt in two directions  
Ships flat-packed

## SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz  
Power Consumption: 10.5W per lamp  
Color temperature: 2700K  
Luminosity: 800 Lumens per lamp  
Luminaire efficacy: 76 Lumens/Watt  
Color Rendition Index: 90 CRI  
Title 20 compliant  
50K hour lifespan  
Cable length: 10' (305cm) (Field Cuttable)  
1 year warranty

## CERTIFICATIONS



## PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm
Chandelier canopy 17":	15LBS	22" X 22" X 6"
	6.8KGS	56cm X 56cm X 15cm
Chandelier canopy 26":	30LBS	32" X 32" X 6"
	13.6KGS	81cm X 81cm X 15cm

## NOTES

Custom requests can be considered on volume orders



## FINISHES



WHITE



GRAPHITE



WHITE

## DIMENSIONS

