


SHARE YOUR FIRST VOYAGE.

Tag us

 POPBOARDCO


BOARD CO.


MADE
FOR
MAKING

INFO@POPBOARDCO.COM | 888-758-9777



INFLATABLE SUP MANUAL

BOARD INFLATION

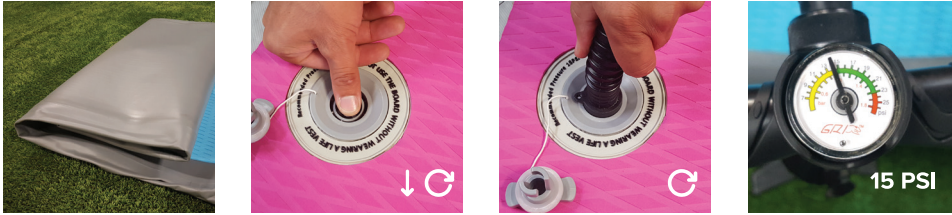


1. To prepare your inflatable paddleboard for inflation roll your board onto a flat & smooth surface.
2. Confirm that the valve stem is in the up position by pushing the valve stem down and twisting a quarter turn. The up position allows air into, but not out of the board.
3. Insert pump hose and turn clock-wise into receiving valve near tail & top of board.
4. Pump the board until the gauge reaches 15 PSI. Although the board will be rigid & ready to ride at 12 PSI, we recommend the additional pumps for optimal rigidity & performance.

* PUMP GAUGE WILL NOT RISE UNTIL INTERNAL PRESSURE REACHES 7 PSI *



BOARD DEFLATION

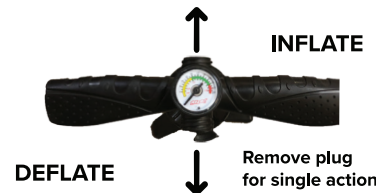







1. To deflate your board push down and quarter turn the valve stem to place it in the down position. When the valve stem is in the down position air will flow out of the board.
2. Then fold the board from nose to tail towards the valve stem to remove air from the board.
3. Reverse the hose connection and pump to remove any remaining air from the board.
4. For maximum compression of the board, fold the board now from tail to nose. The length of the fin box matches the width of the bag. Folding from the fin box to nose will make for a perfect fit inside the bag each time.

FIN INSTALLATION



1. Remove screw & square washer from fin, insert washer into base slot & slide towards nose of board.
2. Locate the knobs on the back of the fin.
3. Angle & insert fin into base slot and slide fin towards the back of the board.
4. Align the hole in fin with the hole in the square washer. Insert screw through fin & washer until tight.

CARE & MAINT.

-  **LIMIT EXPOSURE TO DIRECT SUNLIGHT**
 Extended exposure to direct sunlight & UV rays when not in use can result in fading and damage your inflatable paddleboard. Storing your board in shaded & well ventilated areas will extend the life of your product.
-  **PLACE BOARD WITH EVA TRACTION PAD FACING DOWN**
 The deck pad is designed to provide traction however this material insulates also heat and can increase the internal temperature of your board. Placing the board with the traction pad facing down will reduce your boards internal temperature & help retain your boards color & vibrancy.
-  **STORE IN MODERATE TEMPERATURES WHEN NOT IN USE**
 Extended exposure to temperatures below 0 & above 135 degrees Fahrenheit can compromise the seal along the seams of all inflatable paddleboards. Storing in areas without ventilation can result in extreme temperatures (i.e. Garage or Vehicle).
-  **RINSE WITH FRESH WATER AFTER USE**
 Rinse the board with fresh water to remove salt and sand deposits after use.
-  **WEAR A COAST GUARD APPROVED PERSONAL FLOTATION DEVICE**
 In areas designated outside of swimming, surfing or bathing it is required by law that riders wear a United States Coast Guard approved flotation device.
-  **LEAK DETECTION**
 If you are experiencing pressure loss begin by searching for a leak near the valve. The valve may come loose from use over time and can be easily tightened using the tool included in your repair kit. Apply soap and water to any suspected puncture and leak areas. Bubbles will emerge if a leak or puncture has occurred. Included in your board bundle is a repair kit with glue and PVC repair fabric if needed.

SHARE YOUR FIRST VOYAGE WITH US. TAG US