



High quality polycarbonate PL floodlight. Supplied with one, two or three 13 Watt twin tube compact fluorescent lamps. Adjustable swivel mounting arm with 1/2" thread. Lamps supplied.

Color: Bronze

Weight: 2.1 lbs

Project:	Type:
Prepared By:	Date:

Lamp Info		Ballast Info	
Type	13W Twin	Type	NPF 120V
Watts	13W	120V	N/A
Shape/Size	N/A	208V	N/A
Base	N/A	240V	N/A
ANSI	N/A	277V	N/A
Hours	10,000	Input Watts	N/A
Lamp Lumens	900		
Efficacy	N/A		

Technical Specifications

Compliance

UL Listed:

Suitable for wet locations. (PLF 13 &26) For side wall mounting only.

Construction

Housing and Lens:

Corrosionproof and vandal resistant polycarbonate

Lens Gasket:

High-temperature tubular silicone

Reflector:

Anodized aluminum

Minimum Temperature:

0°F

Electrical

Sockets:

GX23 base

Optical

Lamp:

13 watt compact fluorescent lamps supplied with fixture

F13:


Compact Fluorescent 13W

Other

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

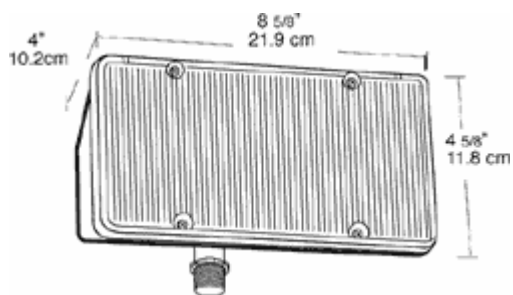

Features

- Corrosion and vandal resistant polycarbonate housing and lens
- Anodized aluminum reflector
- 0°F minimum operating temperature
- High temperature tubular silicone gasket on PLF39 model
- Heavy duty cast aluminum mounting arm and swivel with stainless steel screw
- 1/2" thread fits all standard covers