

Product: \_\_\_\_\_

Type: \_\_\_\_\_

Project: \_\_\_\_\_

## BMB062 Modern Bullet


Architectural Aluminum

### Fixture Ordering Guide

Product Code	Finish
BMB062	TB - Textured Black
	TZ - Textured Bronze

Order Lamp Separately

Example: BMB062-TB-MR16BAB/827/LED

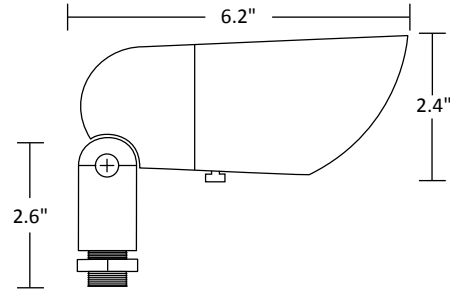

### Shroud:

- Textured Black or Textured Bronze
- UV resistant powder coat protects the finish from salt-spray induced corrosion
- Stainless steel slotted thumb screw for easy, tool-free lamp replacement

### Housing:

- Aluminum construction
- Fully adjustable swivel arm with locking teeth maintains desired angles
- Two silicone o-rings provide a low-friction, watertight seal
- Gasketed knuckle prevents water intrusion
- Heat sink fins provide extra stabilization for the lamp while dissipating heat and extending lamp life, creating an ideal environment for an LED lamp

### Lens:

- Shock and heat-resistant clear, tempered glass

### Socket:

- Ceramic GU5.3 bi-pin socket
- Stainless steel retention clip ensures secure lamp seating and protects the lamp from shock and vibration
- Heat-resistant wire leads

### Lamp:

- MR16 – 35W maximum
- ProLED® MR16 lamps offer 40,000 hour rated life, 10-15V input voltage range, multiple beam spreads (flood, narrow flood, spot and wide flood) and 2700K, 3000K and colors (amber, blue, green, red and color changing options).

### Mounting:

- 8" black ground stake included

### Electrical:

- 12 Volt system
- Pre-wired with 36", 18-2 lead wire
- Two King® DryConn™ waterproof connectors included

### Certifications:

- ETL Listed to UL Standard 1838 and CSA C22.2 No. 250.7

### Fasteners:

- All fasteners are corrosion-resistant stainless steel

### Warranty:

- Backed by a 5-year limited warranty to be free from defects in material and/or workmanship
- ProLED® MR16 lamps installed in Sollos fixtures per installation instructions are backed by a 20-year limited warranty

### Photometrics:

