




Description

Lumecon LED's Midtown Tear Drop, complete with a side-mount hang-straight feature, is a robust, classically designed decorative tear-drop fixture. The LMTD combines a traditional, elegant form factor with a best-in-class, 100,000-hour LED luminaire lifetime rating. The LMTD is purpose-built, boasting exceptional efficacy, custom optics control, unmatched uniformity, and light spread. The LMTD can also adapt to any control system, or mesh network integration. Perfect for DOT, Streetscape, and Downtown Decorative lighting, the LMTD combines USA-Made technology with long-term payback. Applications include parking lots, roadways, pathways, and general area lighting.

Dimensions & Weights

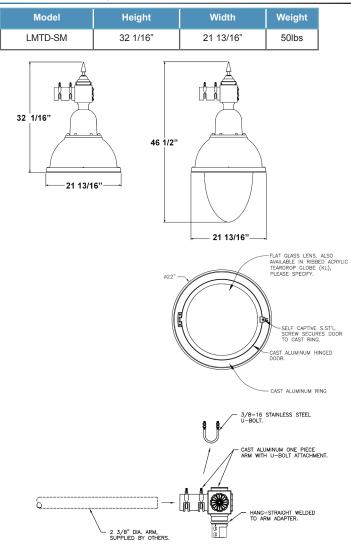

LMTD-SM LED Midtown Tear Drop Side Mount

| Catalog Number: | |
|-----------------|-------|
| Project: | |
| Comments: | |
| Prepared By: | Date: |

Technical Specifications

INPUT VOLTAGE: 120-277V or 347-480V.

HOUSING: Die-cast aluminum housing with 60% gloss polyester powder coat finishes for maximum durability. The base aluminum material is prepared using an environmentally friendly non-chrome 2-step surface cleaning and passivation process. The process results in a more durable conversion laver than traditional chromate conversion coatings and allows maximum adhesion of the powder coating to the aluminum substrate.

MOUNTING: Mounting arm designed for a side hang. Check out our full listing of decorative arms, bases, and poles.

EFFECTIVE PROJECTED AREA (EPA): 1.0

COLOR TEMPERATURE: 2200K, 2700K, 3000K, 4000K, and 5000K available.

LED LIFETIME: All LED's are rated for a minimum of 100 000 hours of continuous operation at ambient temperatures from -40°F/-40°C to 115°F/46°C

COLOR RENDERING INDEX (CRI): Minimum of 80 or higher. CRI 90+ available upon request. CRI 90+ not available in 2200K.

DIMMING: 0-10V standard dimming capability

Custom Optics: Lumecon meticulously engineered premium acrylic optical lenses to maximize the distribution and uniformity of light while minimizing cost. Our arrays distribute light at least 21% further and with 29% more uniformity than leading competitors. Lumecon custom lenses create a uniform, well-lit environment that mitigates illuminance "hot spots" and use less wattage than typical LED area lights

SURGE PROTECTION: Thermally protected 20kA/ 40kV varistor type surge suppressor is included and meets ANSI C136.2-2015: Extreme Level. Also meets IEC61643-11 Class II / EN61643-11 Type 2, and US Dept of Energy MSSLC Model Spec for surge protection. The device is wired in series with the luminaire input power in order to interrupt power to the luminaire when consumed, protecting the LED power supply and circuit boards from additional electrical surges.

 $\textbf{LUMECON ETD}^{\texttt{M}}$ SYSTEM: The enhanced thermal dissipation system engines are thermally bonded to provide maximum thermal dissipation to the exterior of the fixture to ensure long life. To protect the light engine panel from moisture and corrosion, the LED light engine panel is uniformly coated with a UV stabilized acrylic polymer resin that meets MIL and ASTM dielectric standards, UL, and IPC standards for flammability, moisture resistance and thermal shock.

CERTIFICATION DATA: ETL Listed to UL 1598, UL 8750 and CSA 22.2 No. 250. *Full compliance and test documentation is available for TM-21, LM-79, LM-80, ETL Listing to UL1598 and UL 8750, IP66 Rating Pending,

DESIGNLIGHTS CONSORTIUM® (DLC) QUALIFIED PRODUCT: Unless noted, not all versions of this product may be DLC^{\otimes} qualified. For a complete list of Lumecon DLC^{\otimes} Qualified Products visit: www.designlights.org.

MANUFACTURING ORIGIN: US Manufactured and Assembled.

BABA COMPLIANT: Meets Build America, Buy America Act Included in the Infrastructure Investment and Jobs Act, Public Law Number 117-58, Title IX, Subtitle A, Part I – Buy America Sourcing Requirements, Sections 70911-70917 stating Manufactured in the U.S. The cost of components mined, produced, or manufactured in the U.S. is greater than 55 percent of the total cost of all manufactured product components

WARRANTY: 10 Year L70 performance based warranty. For full warranty terms, please visit our website: www.lumecon.com



Email: sales@lumecon.com Website: www.lumecon.com Phone: 248-477-5009

Entail: <u>Selection and Advances</u> recovery the selection of the selection o Please see www.lumecon.com for current specifications and documentation



Fixture Ordering Information

LMTD-SM Options / Ordering Example: LMTD-SM-40-DBZ-T3-FG-1-40-TLR-PC2

| Wattage | Paint Color | Distribution | Lens | Voltage | Color Temperature | Side Mount Adapter Options |
|-----------------|---------------------|---------------|-----------------|--------------|-------------------|---------------------------------------|
| 20 - 20 Watts | See Options on Pg 8 | T2 - Type II | FG - Flat Glass | 1 - 120-277V | 22 - 2200K | TLR – 7-Pin Twist Lock Receptacle |
| 30 - 30 Watts | | T3 - Type III | TD - Tear Drop | 2 - 347-480V | 27 - 2700K | TLRC – Twist Lock Receptacle with Cas |
| 40 - 40 Watts | | T4 - Type IV | | | 30 - 3000K | Aluminum Cover |
| 50 - 50 Watts | | T5 - Type V | | | 40 - 4000K | RNDC – Round Cap Cover |
| 60 - 60 Watts | | | | | 50 - 5000K | SPK – Decorative Spike Cap |
| 70 - 70 Watts | | | | | | |
| 80 - 80 Watts | | | | | | |
| 90 - 90 Watts | | | | | | |
| 100 - 100 Watts | | | | | | |
| 110 - 110 Watts | | | | | | |

Options & Accessories

RS - Rosettes

SC - Polycarbonate Shorting Cap

PC1 - 120-277V Twist Lock Photocell (10-year warranty)

PC2 - 347-480V Twist Lock Photocell (10-year warranty)

DIM4 - 105-305 VAC, 50/60 Hz with ten position field adjustable selector switch

DIM4-HV - High Voltage 312-530 VAC, 50/60 Hz with ten position field adjustable selector switch

DIM4-CD - Constant all-night Dimming


DIM4-CD-HV - Constant all-night Dimming, 315-530 VAC 50/60Hz


DIM4-CUL - 120 VAC. 50/60 Hz, cUL-certified version with gray cover

DIM4-ALC - Adaptive Lighting Control with a 2% per year incremental increase to compensate for an aging fixture

DIM3-XX - Factory set dimming schedule (10 position selector switch not available)

Side Mount Adapter Options






TLR - 7-Pin Twist Lock

Optional Base and Pole Ordering Information

TLRC - Twist Lock Receptacle with Cast Aluminum Cover



RNDC - Round Cap Cover Pictured with ROSETTE option SPK - Decorative Spike Cap

| Side Mount Arm Options | Pole Options | Decorative Base Options |
|--|--|---|
| X - None | X - None | X - None |
| ARM42000 | H-RSA - Round Straight Aluminum | Arlen-13 |
| ARM43000 | H-RTA - Round Tapered Aluminum | Arlen-17 |
| ARM43400 | H-RFA - Round Fluted Aluminum | York-17 |
| ARM43500 | | Homewood |
| For additional Options click here: <u>SM Arm Options</u> | For additional Options click here: <u>Pole Options</u> | For additional Options click here: <u>Decorative Base Options</u> |

Email: sales@lumecon.com Website: www.lumecon.com Phone: 248-477-5009 Copyright © 2023 Lumecon LLC. All Rights Reserved. Note: Specifications and photometric data are subject to change at any time without notice. Please see www.lumecon.com for current specifications and documentation

LED Midtown Tear Drop Side Mount

| | | | | | 2700K | ~ | | 3000K | × | | 400 | 4000K | | 5 | 5000K | | |
|--------------------------------------|--------------|---------|------|--------|--------|------------|--------|-------|------------|----------|--------|--------|----------|--------|-------|------------|---|
| Model | Distribution | Wattage | Lens | Lumens | B U (| G Efficacy | Lumens | ВU | G Efficacy | / Lumens | B | 9 N | Efficacy | Lumens | B U G | i Efficacy | Ś |
| | adkı | 00 | ļ | 0,40 | | | r, jo | | 7 | | | • | | 0100 | | | |
| | 7 | 70 | 2 | 2613 |) - | 131 | 2647 | | 1 132 | 2953 | - | Т | 148 | 2953 | | 148 | |
| I MTD-HS/SM)-20 Tear Dron Lens | £ | 20 | ₽ | 2674 | 0 | 1 134 | 2709 | 10 | 1 135 | 3022 | - H | 1 | 151 | 3022 | 101 | 151 | |
| | 4 | 20 | TD | 2617 | 10 | 1 131 | 2651 | 1 0 | 1 133 | 2957 | 1 (| 0 1 | 148 | 2957 | 1 0 1 | 148 | |
| | 5 | 20 | TD | 2649 | 2 0 3 | 1 132 | 2683 | 2 0 | 1 134 | 2993 | 2 (| 0 1 | 150 | 2993 | 2 0 1 | 150 | |
| | 2 | 20 | FG | 2470 | 10 | 1 124 | 2503 | 1 0 | 1 125 | 2792 | 1 (| 0 1 | 140 | 2792 | 1 0 1 | 140 | |
| | m | 20 | БG | 2546 | 10 | 1 127 | 2579 | 10 | 1 129 | 2877 | 10 | 0 1 | 144 | 2877 | 101 | | |
| LIVITU-HOUST STATE STATE STATE STATE | 4 | 20 | Ð | 2431 | 10 | 1 122 | 2463 | 10 | 1 123 | 2747 | 1 | 0 1 | 137 | 2747 | 101 | 137 | |
| | ъ | 20 | БG | 2435 | 2 0 3 | 1 122 | 2467 | 2 0 | 1 123 | 2752 | 2 (| 0 1 | 138 | 2752 | 2 0 1 | 138 | |
| | 2 | 30 | Ð | 3884 | 10 | 1 129 | 3932 | 10 | 1 131 | 4358 | 1 | 0 1 | 145 | 4358 | 101 | 145 | |
| | m | 30 | ₽ | 3901 | 10 | 1 130 | 3949 | 10 | 1 132 | 4377 | - - | 0 | 146 | 4377 | 101 | | |
| | 4 | 30 | D | 3885 | 10 | 1 130 | 3933 | 10 | | 4359 | 1 | 0 1 | 145 | 4359 | 101 | 145 | |
| | ы | 30 | Ð | 3894 | 2 0 1 | 1 130 | 3941 | 2 0 1 | | 4369 | 2 (| 0 1 | 146 | 4369 | 2 0 1 | 146 | |
| | 2 | 30 | Ð | 3845 | 10 | 1 128 | 3892 | 0 | | 4314 | 10 | 1 | 144 | 4314 | 101 | | |
| | m | 30 | ß | 3866 | 10 | 1 129 | 3913 | 10 | 1 130 | 4337 | 1 | 0 1 | 145 | 4337 | 101 | 145 | |
| | 4 | 30 | ß | 3835 | 10 | 1 128 | 3881 | 10 | 1 129 | 4302 | | 0 1 | 143 | 4302 | 101 | | |
| | ъ | 30 | БG | 3836 | 2 0 2 | 1 128 | 3882 | 2 0 | 1 129 | 4303 | 2 (| 0 1 | 143 | 4303 | 2 0 1 | 143 | |
| | 2 | 40 | £ | 5139 | | 1 128 | 5202 | 0 | 1 130 | 5771 | | 0 1 | 144 | 5771 | 101 | | |
| | m | 40 | ₽ | 5161 | 10 | 1 129 | 5225 | 10 | 1 131 | 5796 | н П | 01 | 145 | 5796 | 101 | 145 | |
| LIVI I D-H3(SIVI)-40 LEAR Drop LEAS | 4 | 40 | ₽ | 5140 | 10 | 1 129 | 5204 | 10 | | 5772 | - - | 01 | 144 | 5772 | 101 | | |
| | ы | 40 | £ | 5152 | 2 0 | | 5215 | 2 0 | | 5785 | 2 (| 0 1 | 145 | 5785 | 2 0 1 | | |
| | 2 | 40 | Ð | 5087 | 0 | 1 127 | 5150 | 10 | | 5712 | 10 | 1 | 143 | 5712 | 101 | 143 | |
| TIMIT US/SMI AD EIST CISCUL | £ | 40 | FG | 5114 | 10 | 1 128 | 5177 | 10 | 1 129 | 5743 | 1 (| 0 1 | 144 | 5743 | 1 0 1 | | |
| | 4 | 40 | Б | 5073 | 10 | 1 127 | 5135 | 1 0 | 1 128 | 5696 | 1 (| 0 1 | 142 | 5696 | 101 | 142 | |
| | 5 | 40 | FG | 5074 | 0 | 1 127 | 5137 | 2 0 | 1 128 | 5697 | 2 0 | 0 1 | 142 | 5697 | 2 0 1 | | |
| | 2 | 50 | ΤD | 6374 | 10 | 1 127 | 6453 | 1 0 | 1 129 | 7163 | 1 (| 0 1 | 143 | 7163 | 1 0 1 | 143 | |
| I MTD-HS(SM)-50 Tear Dron Lens | 3 | 50 | TD | 6402 | 1 0 | 1 128 | 6481 | 1 0 | 1 130 | 7195 | 1 (| 0 1 | 144 | 7195 | 1 0 1 | | |
| | 4 | 50 | τD | 6376 | 10 | 1 128 | 6455 | 1 0 | 1 129 | 7165 | 1 (| 0 1 | 143 | 7165 | 101 | | |
| | 5 | 50 | TD | 6390 | 2 0 3 | 1 128 | 6469 | 2 0 | 1 129 | 7181 | 2 0 | 0 1 | 144 | 7181 | 2 0 1 | 144 | |
| | 2 | 50 | FG | 6309 | 1 0 | 1 126 | 6387 | 1 0 | 1 128 | 7090 | 1 (| 0 1 | 142 | 7090 | 1 0 1 | 142 | |
| I MATO LUS/SMI) EO Elat Glace I and | С | 50 | FG | 6343 | 10 | 1 127 | 6422 | 1 0 | 1 128 | 7129 | 1 (| 0 1 | 143 | 7129 | 1 0 1 | 143 | |
| | 4 | 50 | FG | 6291 | 1 0 | 1 126 | 6369 | 1 0 | 1 127 | 7070 | 1 (| 0 1 | 141 | 7070 | 1 0 1 | 141 | |
| | 5 | 50 | FG | 6293 | 2 0 | 1 126 | 6371 | 2 0 | 1 127 | 7072 | 2 (| 0 1 | 141 | 7072 | 2 0 1 | 141 | |
| | 2 | 60 | ΤD | 7588 | 10 | 1 126 | 7683 | 1 0 | 1 128 | 8536 | 1 (| 0 1 | 142 | 8536 | 1 0 1 | | |
| I MTD-HS/SM)-60 Tear Dron Lens | 3 | 60 | TD | 7622 | 10 | 1 127 | 7717 | 1 0 | 1 129 | 8574 | 1 (| 0 1 | 143 | 8574 | 1 0 1 | 143 | |
| | 4 | 60 | Ð | 7591 | 10 | 1 127 | 7685 | 1 0 | 1 128 | 8538 | 1 0 | 0 1 | 142 | 8538 | 101 | 142 | |
| | 5 | 60 | TD | 7608 | 2 0 1 | | 7703 | 2 0 | 1 128 | 8558 | 2 (| 0 1 | 143 | 8558 | 2 0 1 | 143 | |
| | 2 | 60 | БG | 7511 | 10 | 1 125 | 7604 | 1 0 | 1 127 | 8448 | 1 (| 0 1 | 141 | 8448 | 1 0 1 | 141 | |
| I MTD-HS/SM)-60 Flat Glace Lans | 3 | 60 | FG | 7552 | 10 | 1 126 | 7646 | 1 0 | 1 127 | 8494 | 1 0 | 0 1 | 142 | 8494 | 1 0 1 | 142 | |
| | 4 | 60 | FG | 7489 | 1 0 | | 7583 | 1 0 | 1 126 | 8424 | 1 (| 0 1 | 140 | 8424 | 1 0 1 | | |
| | 5 | 60 | Б | 7491 | 2 0 1 | | 7585 | 2 0 | 1 126 | 8426 | 2 0 | 1 | 140 | 8426 | 2 0 1 | 140 | |

Email: <u>sales@iumecon.com</u> Website. <u>www.lumecon.com</u> Phone: 248.477-5009 Copyright © 2021. Lumecon ICL: All Rights Reserved. Note: Specifications and photometic data are subject to change at any time without notice. Please see www.lumecon.com for ourrent specifications and documentation




LED Midtown Tear Drop Side Mount

| | | | | | 2700K | | | 3000K | УK | | | 4000K | | | 5000K | |
|-----------------------------------|----------------------|-----------|------|--------|-------|----------|--------|-------|--------|----------|----------|-------|------------|--------|-------|----------|
| Model | Distribution Type | Wattage L | Lens | Lumens | B U G | Efficacy | Lumens | B U | Ð | Efficacy | Lumens I | B U (| G Efficacy | Lumens | B U G | Efficacy |
| | 2 | 70 | TD | 8783 | 1 0 1 | 125 | 8894 | 1 0 | 1 | 127 | 9889 | 10 | 1 141 | 6886 | 1 0 1 | 141 |
| | 3 | 20 | TD | 8822 | 1 0 1 | 126 | 8933 | 1 0 | 1 | 128 | 6633 | 10 | 1 142 | 6633 | 1 0 1 | 142 |
| | 4 | 70 | TD | 8786 | 101 | 126 | 8896 | 1 0 | 1 | 127 | 9892 | 10 | 1 141 | 9892 | 1 0 1 | 141 |
| | 5 | 70 | TD | 8806 | 2 0 1 | 126 | 8917 | 2 0 | 1 | 127 | 9914 | 2 0 3 | 1 142 | 9914 | 2 0 1 | 142 |
| | 2 | 70 | FG | 8692 | 1 0 1 | 124 | 8802 | 1 0 | 1 | 126 | 9786 | 10 | 1 140 | 9786 | 1 0 1 | 140 |
| I MTD HS/SMI 70 Flat Glass I and | 3 | 70 | FG | 8740 | 1 0 1 | 125 | 8850 | 1 0 | 1 | 126 | 9840 | 10 | 1 141 | 9840 | 1 0 1 | 141 |
| | 4 | 70 | FG | 8667 | 101 | 124 | 8776 | 10 | 1 | 125 | 9758 | 10 | 1 139 | 9758 | 101 | 139 |
| | ъ | 70 | FG | 8670 | 2 0 1 | 124 | 8779 | 2 0 | 1 | 125 | 9761 | 2 0 2 | 1 139 | 9761 | 2 0 1 | 139 |
| | 2 | 80 | TD | 9958 | 101 | 124 | 10084 | 1 0 | 1 | 126 | 11221 | 10 | 1 140 | 11221 | 101 | 140 |
| | З | 80 | TD | 10002 | 101 | 125 | 10129 | 1 0 | 1 | 127 | 11272 | 10 | 1 141 | 11272 | 101 | 141 |
| | 4 | 80 | TD | 9961 | 101 | 125 | 10087 | 1 0 | 1 | 126 | 11225 | 10 | 1 140 | 11225 | 101 | 140 |
| | 5 | 80 | τD | 9984 | 2 0 1 | 125 | 10110 | 2 0 | 1 | 126 | 11250 | 2 0 3 | 1 141 | 11250 | 2 0 1 | 141 |
| | 2 | 80 | FG | 9854 | 101 | 123 | 6266 | 1 0 | 1 | 125 | 11104 | 10 | 1 139 | 11104 | 1 0 1 | 139 |
| | 3 | 80 | FG | 6066 | 1 0 1 | 124 | 10035 | 1 0 | 1 | 125 | 11166 | 10 | 1 140 | 11166 | 1 0 1 | 140 |
| | 4 | 80 | FG | 9825 | 1 0 1 | 123 | 9950 | 1 0 | 1 | 124 | 11072 | 10 | 1 138 | 11072 | 1 0 1 | 138 |
| | 5 | 80 | FG | 9828 | 2 0 1 | 123 | 9953 | 2 0 | 1 | 124 | 11075 | 2 0 3 | 1 138 | 11075 | 2 0 1 | 138 |
| | 2 | 90 | TD | 11113 | 101 | 123 | 11255 | 1 0 | 1 | 125 | 12534 | 10 | 1 139 | 12534 | 101 | 139 |
| I MTD-HS/CM)-90 Tear Dron Lens | 3 | 90 | Ð | 11163 | 1 0 1 | 124 | 11306 | 1 0 | 1 | 126 | 12591 | 10 | 1 140 | 12591 | 1 0 1 | 140 |
| | 4 | 06 | TD | 11116 | 101 | 124 | 11258 | 1 0 | 1 | 125 | 12538 | 10 | 1 139 | 12538 | 101 | 139 |
| | 5 | 06 | TD | 11142 | 2 0 1 | 124 | 11284 | 2 0 | 0 1 3 | 125 | 12567 | 2 0 3 | 1 140 | 12567 | 2 0 1 | 140 |
| | 2 | 90 | FG | 10996 | 1 0 1 | 122 | 11136 | 1 0 | 1 | 124 | 12402 | 1 0 : | 1 138 | 12402 | 1 0 1 | 138 |
| I MTD_HS/SMJ_00 Flat Glace Lans | 3 | 90 | FG | 11058 | 1 0 1 | 123 | 11199 | 1 0 | 1 | 124 | 12472 | 10 | 1 139 | 12472 | 1 0 1 | 139 |
| | 4 | 90 | FG | 10964 | 1 0 1 | 122 | 11104 | 1 0 | 1 | 123 | 12366 | 1 0 : | 1 137 | 12366 | 1 0 1 | 137 |
| | 5 | 90 | FG | 10967 | 2 0 1 | 122 | 11107 | 2 0 | 1 | 123 | 12369 | 2 0 3 | 1 137 | 12369 | 2 0 1 | 137 |
| | 2 | 110 | Ð | 13362 | 101 | 121 | 13536 | 10 | 1 | 123 | 15099 | 10 | 1 137 | 15099 | 101 | 137 |
| I MTD-HS/SM)-110 Tear Dron Lens | ε | 110 | £ | 13423 | 101 | 122 | 13598 | 10 | 1 | 124 | 15168 | 10 | 1 138 | 15168 | 101 | 138 |
| | 4 | 110 | £ | 13366 | 101 | 122 | 13540 | 10 | 1 | 123 | 15104 | 10 | 1 137 | 15104 | 101 | 137 |
| | 5 | 110 | TD | 13398 | 2 0 1 | 122 | 13572 | 2 0 | 1 | 123 | 15139 | 2 0 3 | 1 138 | 15139 | 2 0 1 | 138 |
| | 2 | 110 | Ð | 13219 | 101 | 120 | 13391 | 10 | 1 | 122 | 14938 | 10 | 1 136 | 14938 | 101 | 136 |
| I MTD-HS/SM)-110 Flat Glace I ens | ε | 110 | ß | 13295 | 101 | 121 | 13468 | 10 | 1 | 122 | 15023 | 10 | 1 137 | 15023 | 101 | 137 |
| | 4 | 110 | ß | 13180 | 101 | 120 | 13351 | 10 | н Т | 121 | 14893 | 10 | 1 135 | 14893 | 101 | 135 |
| | 5 | 110 | FG | 13184 | 2 0 1 | 120 | 13355 | 2 0 1 | | 121 | 14898 | 2 0 1 | 1 135 | 14898 | 2 0 1 | 135 |

Email: saies @iumecon.com Website: www.lumecon.com Phone: 248-477-5009 Copyright © 2022 Lumecon LC. All Rights Reserved. Note: Specifications and photometric data are subject to change at any time without notice. Please see www.lumecon.com for current specifications and documentation





Photometric Data

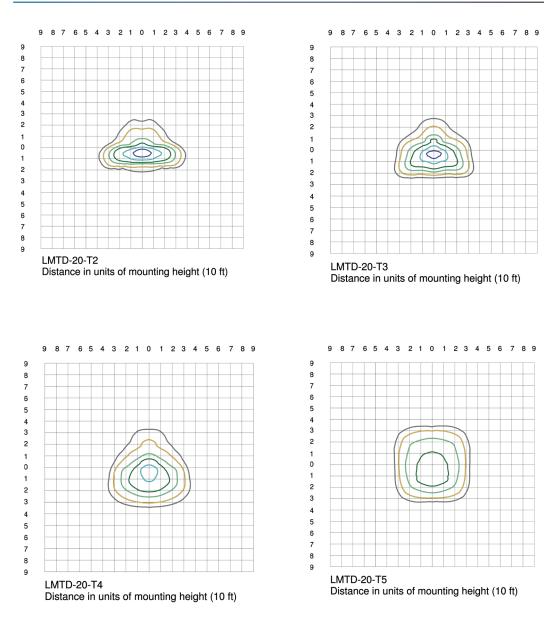





Photometric Data

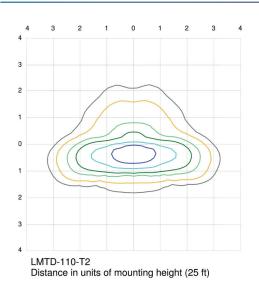

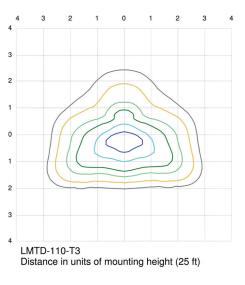

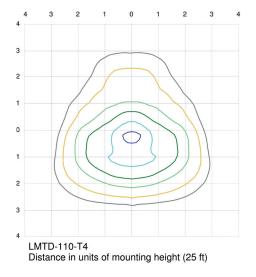

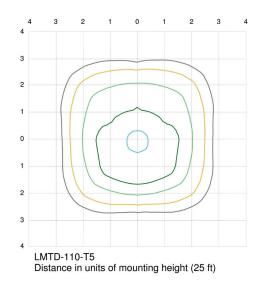



Paint Finish Options

| Standard | | | | | | | |
|-------------------|--------------------|--------------------|---------------------|----------------------|-------------------|--------------------------|-----------------|
| | | | | | | | |
| BLK Black | FGN Forest Green | WHT White | LBR Landscape Browr | n BRN Brown | DBZ Dark Bronze | ARB Architectural Bronze | SRT Shadow Rust |
| | | | | | | | |
| Premium | | | | | | | |
| ABS Antique Brass | ACP Antique Copper | VGN Verde | ASI Antique Silver | WBZ Weathered Bronze | RBZ Rustic Bronze | | |
| Abo Anique Diass | Nor Anique copper | | All Andre Onver | | | | |
| | | | | | | | |
| ARD Antique Red | VCP Verde Copper | VTC Vintage Copper | GRA Granite | IRN Ironstone | VBZ Verde Bronze | | |