



PRODUCT INSTALLATION INSTRUCTIONS

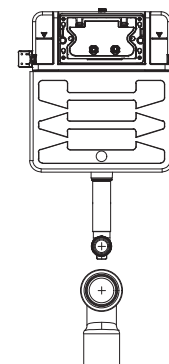

The panel is optional

A INSTALLATION DIMENSION

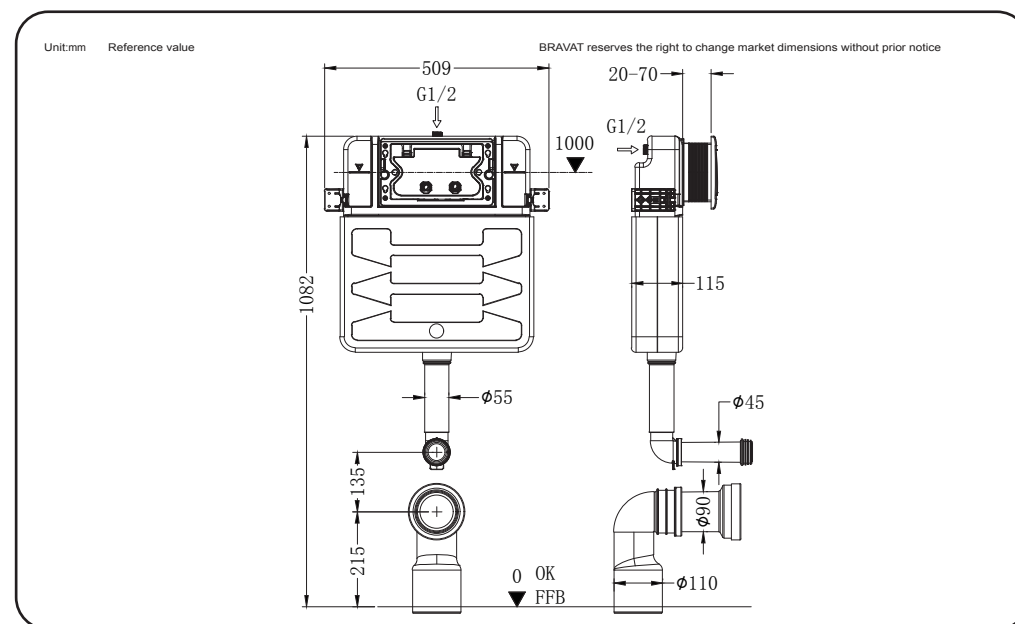

B HELPFUL TOOLS

Impact Drill



Adjustable Wrench



Marking Gauge and Pencil



Tape Measure



Teflon Tape



Screwdriver




C INSTALLATION STEP


Important remind:

1. Please read through this Instructions carefully prior to installation, and our company shall not be responsible for any loss caused by not installing according with this Instructions. There are lubricants in production for toilet bowl installation.
2. Please install this product before paving tiles. Before installing, confirm the installation location and confirm the horizon after the completion of the project. Draw the horizon $\downarrow$ on the installation wall. This product is installed as a baseline $\downarrow$ for the installation height.
3. the size unit is mm, $\downarrow$ = the floor height after the project. The fill water pressure and stop filling pressure is between 0.01MPa-2.0MPa, water temperature: 2°C-45°C, flush volume can be adjustable.


Parts List

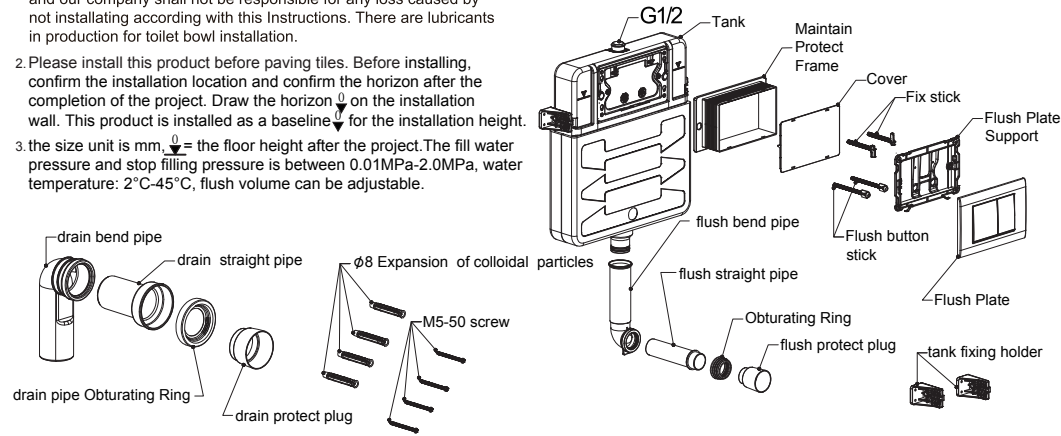


1. False wall (half false wall)

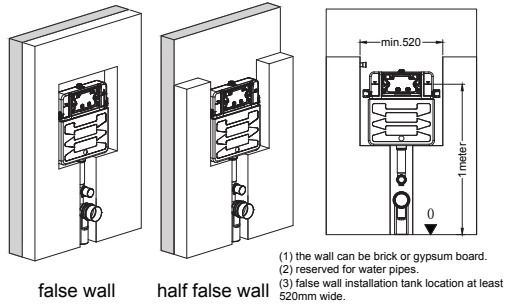

2. Connect the drain pipe

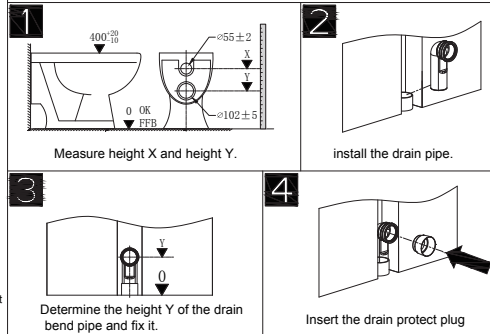


3. Install the cistern

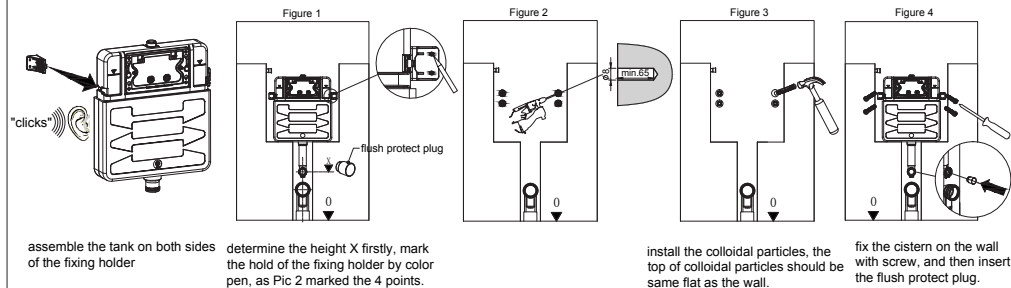


D MAINTENANCE

USAGE




1. Don't stand on or place heavy article on toilet to avoid toilet seat damage.
2. Try to protect toilet surface and radius in particular from solid stuff hitting or scratching to avoid glaze damage
3. Don't expose directly in light as Sunshine or product might be discolored.
4. Don't lean backward heavily against tank when using toilet to avoid tank crack.

CLEANING



1. Wiped clean with neutral cleaner or soft damp cloth.
2. DON'T use to hard articles like wire brush or scouring pad to clean lest toilet surface is damaged.

MAINTENANCE




1. Clean filter of float valve assembly regularly.
2. Close supply shut-off valve and drain tank when toilet in nonuse for long time.

E SPECIAL STATEMENT


The products installation instruction is written in accordance with the latest product information, following the sustainable development strategy of the Company, to improve continually the produce's specification, performance etc.,subject to change without notice.
(The Company reserves the right to interpret)

Attention: If the product is different from the drawing,please take the object as right.

4. connect the water inlet

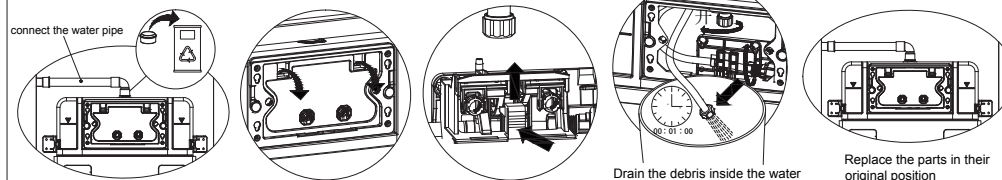


5.preparation before paved

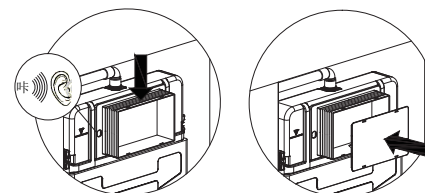


6.paved


Cover the concealed system with gypsum board or composite panel, and finally pave it with tiles. Wall paving thickness: minimum 20mm and maximum 70mm.

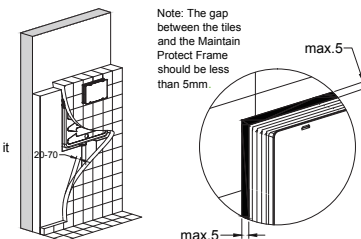

7. Install the flush plate

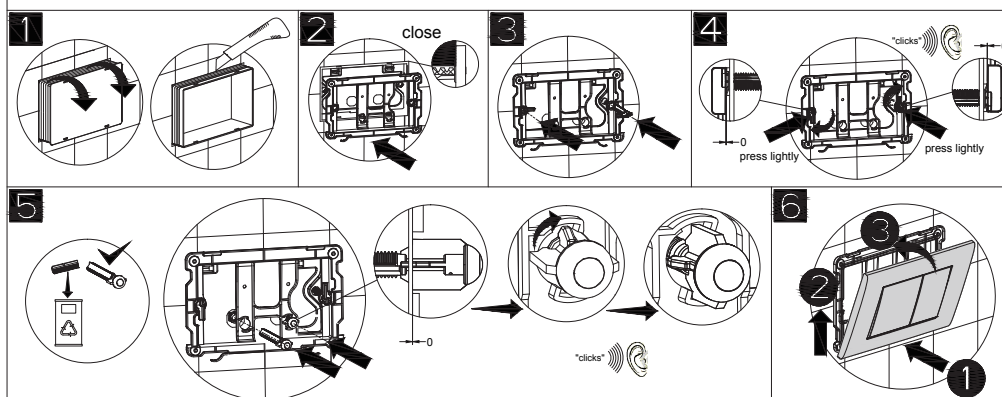

8. Install the toilet

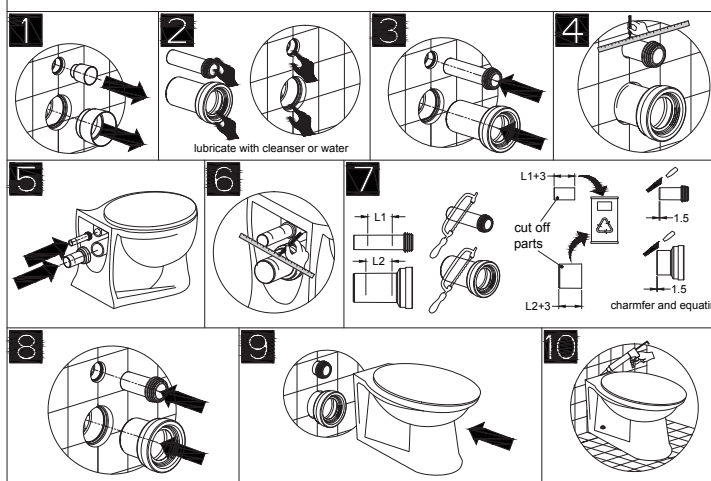

9.installation finished

