

# Visit portable receiver

BE1033



 Bellman & Symfon®



## Features

**Powerful sound**  
Adjustable up to 93 dB

**Clear signal identification**  
Uses individual sound signatures

**Long lasting power**  
Up to 3 years battery life

**Bed shaker outlet**  
For nighttime alerts

**Easy setup**  
Works right out of the box

## Keeps you in the loop.

The portable receiver from Bellman & Symfon is part of the Visit smart home system that helps you to keep tabs on your home. It alerts you with lights and sounds when the doorbell or telephone rings, when your baby needs you or if a fire should occur.

It requires no installation procedures and is very easy to use. It's completely wireless so you can bring it out in the garden or balcony and has a battery life of up to three years.


### Clear and distinct alerts

The portable receiver is capable of producing a sound signal of up to 93 dB and features a large, ergonomic dial that makes it easy to adjust the volume to your liking. It uses individual sound signatures to differentiate the Visit signals.

Additionally, you can connect a bed shaker and wake up to vibrations if something should happen while you are asleep.



# Technical specifications

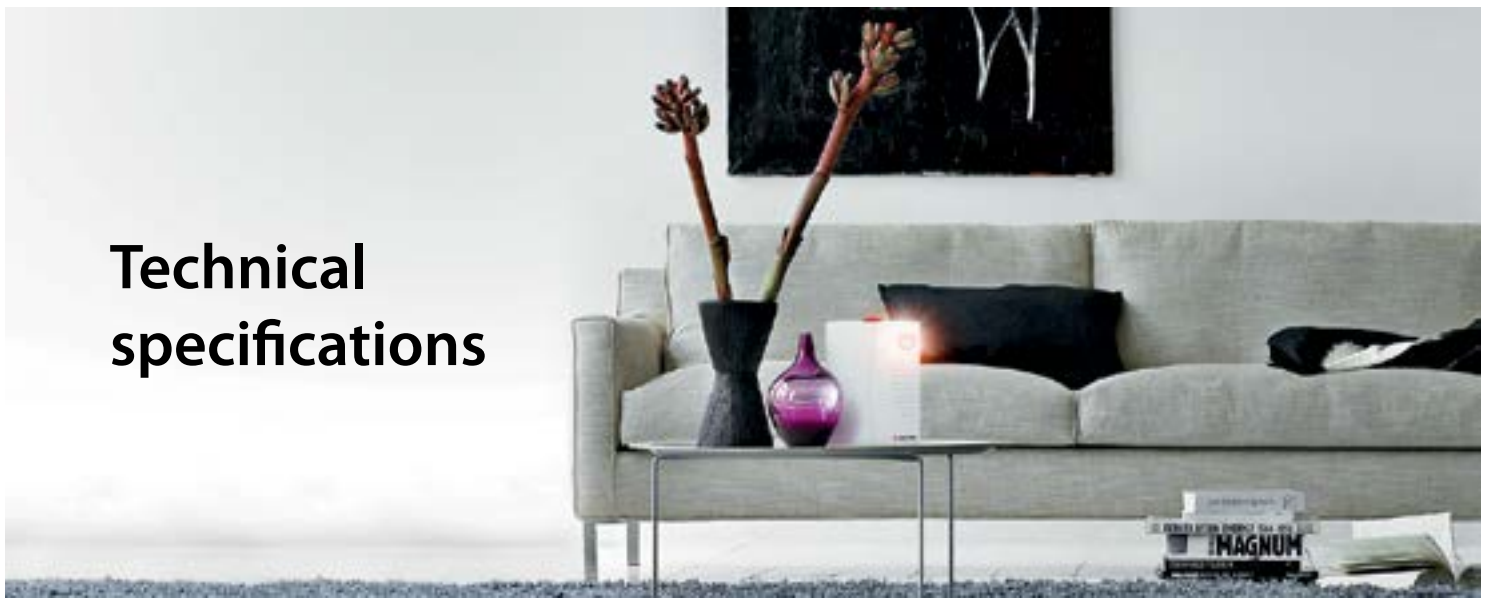


## Dimensions and weight

Height	<b>165 mm, 6.5"</b>
Width	<b>130 mm, 5.1"</b>
Depth	<b>36 mm, 1.4"</b>
Weight	<b>590 g, 20.8 oz. (incl. battery)</b>



## Buttons and controls

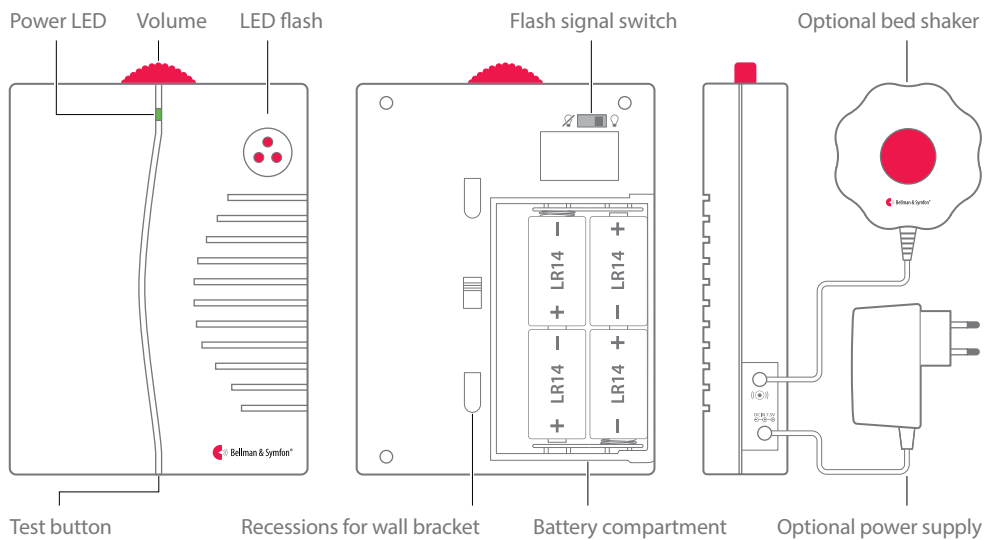

## Features

- Adjustable sound signal  
Max 93 dBA @ 1 m, frequency range: 500-1000 Hz
- Clear signal identification  
Uses individual sound signatures
- Long lasting power  
Up to 3 years battery life
- Bed shaker outlet  
For nighttime alerts
- Easy setup  
Works right out of the box

## Connections

- Outlet for power supply and bed shaker
- Vibrator power: 2.0 – 4.0 VDC

## Environmental requirements

- Operating temperature: 59° to 95° F (15° to 35° C)
- Relative humidity: 5% to 95% (non condensing)

## Power and battery

- Battery power  
4 x 1.5V LR14 alkaline batteries
- Mains power  
7.5 V DC / 1000 mA with optional power supply
- Power consumption  
Active: 1000 mA, idle position: 0.1 mA
- Operating time  
2 – 3 years with alkaline batteries

## Frequency and coverage

- Radio frequency: 433.92 MHz
- Coverage: 30 – 80 m (98 - 260 ft), depending on the building's characteristics and the combination of transmitters and receivers.

## In the box

- BE1033 Portable receiver
- 4 x 1.5V LR14 batteries
- Wall bracket
- Screws and plugs
- User manual



## Accessories

- BE1270 Bed shaker
- BE9273+BE9274 Power supply unit

© 2016 Bellman & Symfon AB. All rights reserved.

Bellman, Bellman & Symfon and the Bellman & Symfon logo are registered trademarks of Bellman & Symfon AB. This leaflet is subject to change without prior notice.

BE1033\_001DAS002 (US)

[bellman.com](http://bellman.com)