

EX

< 3 >



### Description

Concealed thermostatic 3 ways 1/2"-3/4" with wax thermostatic element. Diverter valve with integrated shut off 1/2". Built in non-return valve. Safety stop at 38°C. Flow rate one outlet: 24,6 l/min. at 3 bar. and other outlet: 22 l/min. at 3 bar.

### Finish



chrome  
100063389


### Certifications and quality characteristics



### Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4
Flow - Outlet elbow (l/min) (±15%)	0	9	13	18	22.5	26
Flow - Diverter (l/min) (±15%)	0	6	9	13	15	17
Flow - Mixer (l/min) (±15%)	0	6	9	13	15	17

◆ Outlet elbow (l/min) ▲ Diverter (l/min) ⇌ Mixer (l/min)

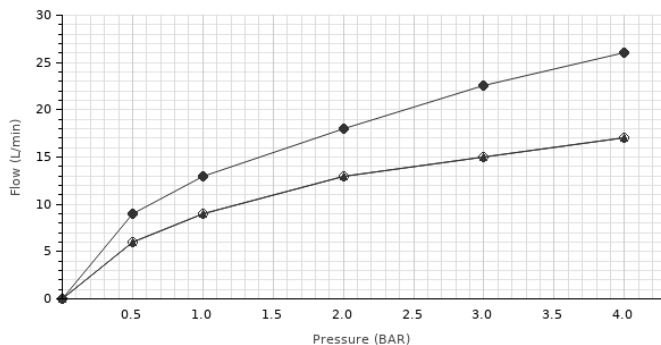

### Technical drawing

Dimensions in mm

