



# SQUARE

## Description

Concealed thermostatic 2 ways 1/2"-3/4" with wax thermostatic element. Diverter valve with integrated shut off 1/2". Built in non-return valve. Safety stop at 38°C. Flow rate bath 25,4 l/min. at 3 bar and flow rate shower 22,7 l/min.at 3 bar.

## Finish




chrome  
100063404

## Certifications and quality characteristics



## Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - S1 (l/min) (±15%)	0	9.9	14.3	20.5	25.4	29.4	33
Flow - S2 (l/min) (±15%)	0	8.7	12.7	18.6	22.7	26.4	29.5

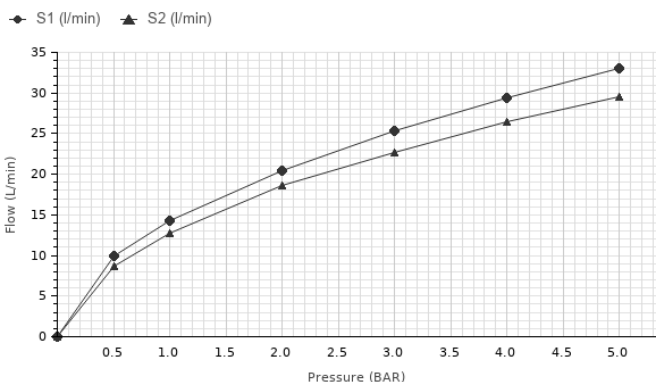

## Technical drawing

Dimensions in mm

