### Bathroom Taps









#### Description

Thermostatic concealed bath/shower mixer with 2 outlets. Thermostatic cartridge. Connections 1/2". Trim kit and Project Line body included. The flow rate at 3 bar is 21 l/min for both outlets. Possibility to combine functions simultaneously. Trims for hand shower and rain buttons installed. It incorporates additionally a cascade trim button interchangeable. Chrome: It can be combined with 100243874, 100243838, 100284604 and 100243839 opening the aditional outlet at the bottom. Black: It can be combined with 1100271996 and 100284630 opening the aditional outlet at the bottom.


#### Finish



chrome 100243848

## Flow rate diagramme


Pressure (bar)	0	1 2	3	4	5
Flow - A (I/min) (±15%)	0	10.8 17.4	21.6	24.8	28.2
Flow - B (I/min) (±15%)	0	10.8 17.4	21.6	25.2	28.8

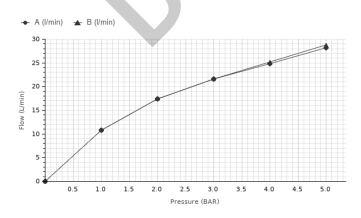

# Technical drawing



Dimensions in mm



Noken does not guarantee the supply of discontinued items



Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.

© 2023 noken | Edition: 17/04/2023 INT Ref.124827