

# ROUND INOX

## Description

Concealed thermostatic 2 ways 3/4"-1/2" including 1/2" adaptor for inlets with thermostatic element. Diverter valve with integrated shut off 1/2". Built in non-return valve. Safety stop at 38°C. Flow rate on each outlet are 25,9 l/min and 23,5 l/min at 3 bar


## Finish



brushed stainless steel  
100288150

## Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Out 1 (l/min) (±15%)	0	10.23	14.59	21.02	25.9	29.97	33.66
Flow - Out 2 (l/min) (±15%)	0	9.4	13.38	19	23.49	27.21	30.47

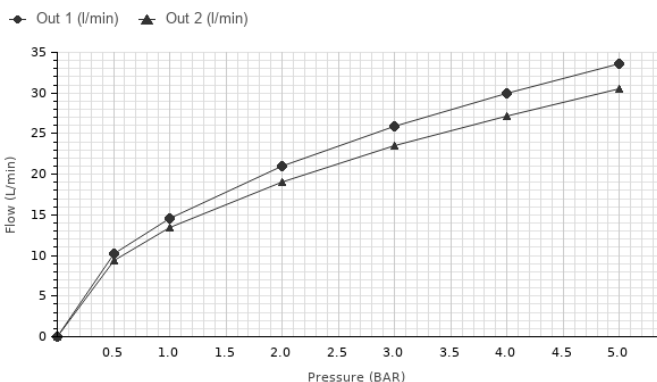

## Technical drawing

Dimensions in mm

