



Description

MARNE - Concealed thermostatic 2 ways 1/2" with wax thermostatic element. Diverter valve with integrated shut off 1/2". Flow rate bath 23,4 l/min. at 3 bar and flow rate shower 21,1 l/min. at 3 bar. Built in non-return valve. Safety stop at 38°C.

Finish




chrome
100293470

Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Spout (l/min) (±15%)	0	8.8	13.1	18.9	23.4	27	30.3
Flow - Rain (l/min) (±15%)	0	7.8	11.7	17	21.1	24.7	27.8

◆ Spout (l/min) ▲ Rain (l/min)

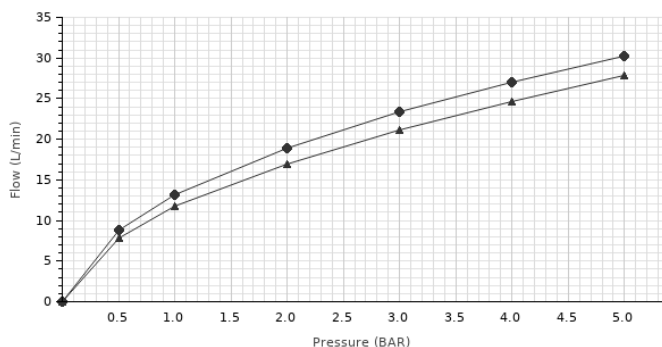

Technical drawing

Dimensions in mm

