


Model: AC4 STYLE 1L QUIET

Codes: 100297861

Group: G-204

Format: 19,2X126,1X0,7

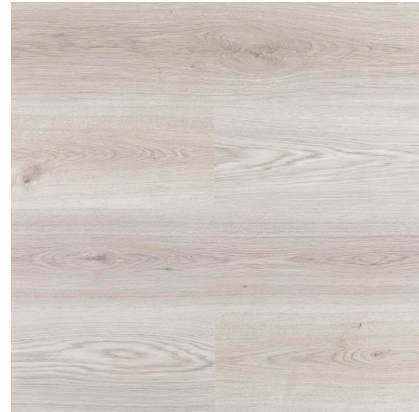

## COMPOSITION














	Size	Material	Type of material
Layer 1	0.2	Melamine	Aminoplastic thermosetting resins
Layer 2	0.1	Decorative paper	
Layer 3	6.6	HDF	High-density Fiber Board and water-repellent glues
Layer 4	0.1	Backside	Sheets of kraft paper impregnated with phenolic resins

## CERTIFICATIONS

Carb certification	CARB: Phase II compliant
--------------------	--------------------------

## FEATURES

-  Imitates the surface of wood
-  5 year warranty for commercial use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  Format where only one board has been used to finish the entire base surface
-  PanEuropean Forest Certification that guarantees to consumers the origin of the products from sustainably managed forests
-  23. Intensive residential
-  **AC4** Abrasion-resistance level as per Standard UNE-EN 13329
-  Installation system where gluing the boards to the floor is not necessary. They are placed on a foam, joined together, as long as the product does not already have a foil on the back of the piece.
-  20 year warranty for domestic use valid for laminate floors that have been installed in rooms where they are exposed to normal wear and tear for their recommended End Use Category in accordance with EN 13329.
-  Is suitable for installing on water radiant heating
-  Safety and joint durability are the main features of this easy installation system that guarantees the elimination of gaps between boards throughout the floor's lifetime. The pressure exerted between boards reinforces the union and prevents it from being carried out incorrectly.
-  32. General commercial

## DIMENSIONAL FEATURES

Squareness of the item (q)	≤0.20 mm	EN 13329*
Difference in height among items	≤0.15 mm	EN 13329*
Uv light fastness	7	EN 438-2,16*
Surface stripping	≥1.00 N/mm <sup>2</sup>	EN 13329 Anexo D*



## LABORATORY TESTS

Resistance to abrasion	AC4	UNE EN 13329:2000*
Impact resistance	IC2	UNE EN 13329*
Resistance to staining	Grado 5 (G 1 y 2) y Grado 4 (G 3)	EN 438*
Resistance to cigarette burns	4	EN 438*
Furniture leg effect	No damage	EN 424*
Castor chair effect	No damage	EN 425*
Swelling in thickness	≤18%	UNE-EN 13329*
Dimensional stability	Max≤0.15 mm	EN 13329*
Formaldehyde emissions	E1	EN 717*
Slip resistance (cls)	Clase DS	EN 14041*
Tensile strength of joints	>1.0 N/mm2	EN 13329*
Fire resistance	Cfl-s1	EN 13501*
Evaluation of propensity to accumulation of electrostatic charges	≤2 kV	EN 14041*
Heat resistance	R=0.056 m2 K/W	ISO 8302-1991*
Swelling in thickness	≤18%	ASTM D 1037*
Slip resistance (dcof)	Class DS:≥0.30	EN 13893*
Critical radiant flux	Cfl	EN ISO 9239-1*
Smoke density (burning)	s1	EN 13501-1*
Density of the board	890 ±5 KG/M3	UNE EN 323*

## PACKING

Boxes	2.4211 M2/BOX	
Pallets	125.8982 M2/PAL	
Units	0.2421 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Square meters	1 M2	
Net weight	6.5837 KG/M2	
Gross weight	6.7572 KG/M2	

## SPECIAL PIECES

SAP	Description	Group	Boxes	Pallet	Units	SKU	Basic Unit	Net Weight	Gross weight
100115891	IGUALACION STYLE QUIET 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.77 KG/PIECES	0.77 KG/PIECES
100176737	MAMPERLAN AC4 STYLE 1L QUIET 7X120X3	G-163	2 PIECES/BOX	200 PIECES/PAL	11.9 PIECES/M2	-	-	1.58 KG/PIECES	1.64 KG/PIECES
100115902	TRANSICION STYLE QUIET 4X270X1	G-155	20 PIECES/BOX	1000 PIECES/PAL	9.26 PIECES/M2	-	-	0.77 KG/PIECES	0.8 KG/PIECES
100114229	ZOCALO STYLE QUIET 8X225X1,4	G-107	12 PIECES/BOX	648 PIECES/PAL	5.56 PIECES/M2	-	-	1.57 KG/PIECES	1.62 KG/PIECES

