



UNICLASS	EPIC
CI/SfB	Y

Technical data sheet

November 2015

Primer

Description

Nicobond Primer – An acrylic dispersion specially formulated to improve adhesion and inhibiting penetration of water in intermittently damp locations. Nicobond primer is used as a pore sealer on floor surfaces to prevent air bubbles rising through subsequently applied sub-floor smoothing compounds and to prolong their flow life and workability. Ideal for priming cement sand renders, screeds and concrete surfaces prior to the application of Nicobond ceramic tile adhesives.

Application

Shake container well before use. Dilute if required. Apply the primer evenly, using a brush or broom, over the sound, clean and dust-free surface and leave to dry to a clear thin film.

System 1 – Slurry Priming

A most effective primer for all cement based adhesives and screeds, internally and externally, is to brush tightly onto the surface a thin even layer of a well stirred mixture of:- 1 volume water 1 volume Nicobond Primer 1 volume of Nicobond cement based product that will then be used. The layer should normally be allowed to set for a few hours before work progresses. **Coverage:** Approximately 6 sq. metres per litre of Nicobond Primer.

System 2 – Priming/Sealing exterior

For the simple priming/sealing of all cementitious and other surfaces particularly for exterior work, brush into the surface a thin even layer of a blend of:- 4 volumes water 1 volume Nicobond Primer mixed by thorough stirring. Allow layer to dry slightly before applying Nicobond smoothing compounds or adhesives. **Coverage:** Approximately 30 sq. meters per litre of Nicobond Primer.

System 3 – Priming/Sealing interior

For the simple priming/sealing of most interior surfaces brush apply a thin even layer of a blend of:- 4 volumes water : 1 volume Nicobond Primer mixed by thorough stirring. Allow layer to thoroughly dry before continuing. **Coverage:** Approximately 30 sq. meters per litre of Nicobond Primer.

System 4 – Non Absorbent Surfaces

A most effective primer for all cement based screeds, brush into the surface a thin even layer of undiluted/neat Nicobond Primer. Allow to dry for a few hours before work progresses. **Coverage:** Approximately 6 – 10 sq metres per litre of Nicobond Primer, depending on surface porosity.

System 5 – Anhydrite Screeds

Prime with 2 coats Nicobond Primer applied at right angles to each other diluted 1: 3 with water.

Application Data

Size :	5 Ltrs & 1 Ltr
Packaging	Polyethylene containers Protect from frost and direct sunlight.
Walk on time @ 20° C	Touch dry and not transferred to shoes
Installation Temperature	Minimum 5°C
Shelf Life	has a storage life of not less than 12 months in the original unopened containers.

Features

Prolongs smoothing compounds' flow life and workability.
Interior and exterior use
Water-based and non-flammable.
Dries almost transparent, will not stain
Reduces porosity of surfaces.

Health & Safety Advice

Nicobond Primer is Non Irritant but irritation may occur if dried material adheres to the skin, avoid contact with skin, eyes and clothing. Do not swallow. Wear suitable protective clothing, chemical resistant gloves and eye/face protection. Keep away from children.

The relevant Material Safety Data Sheet can be obtained from www.ncnicobond.com or directly from N & C Building Products Ltd at the address below.



internal



external



water
resistant




swimming
pools



Lifetime
guarantee



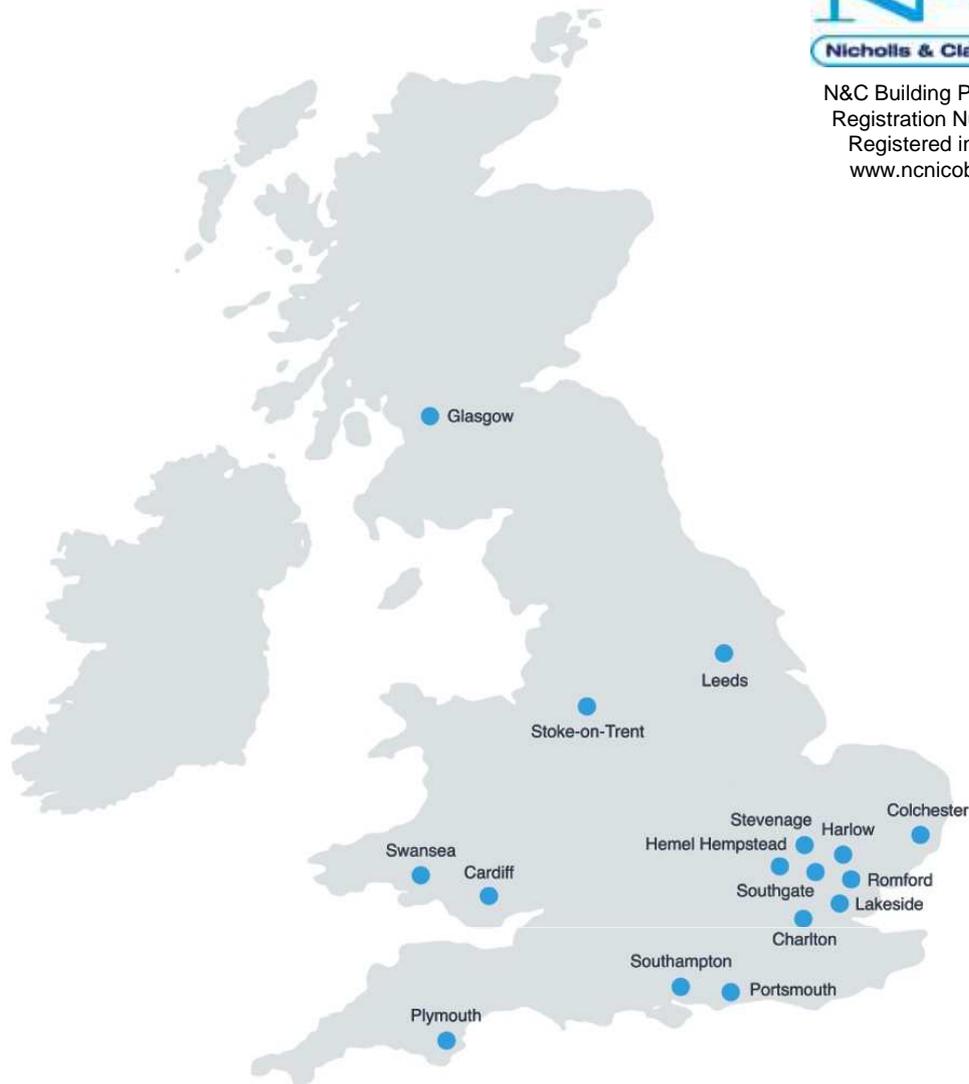

Distribution Centres, Trade Counters & Showrooms

N&C Building Materials
 41 - 51 Freshwater Road
 Chadwell Heath,
 Romford Essex RM8 1SP
 Tel: 020 8586 4600
 Fax: 020 8586 4646

C1 Cothill Trading Estate
 Plympton
 Plymouth PL7 1SR
 Tel: 01752 339724
 Fax: 01752 342746

B1 - B3 Sneyd Trading Estate
 Sneyd Hill, Burslem
 Stoke on Trent ST6 2PA
 Tel: 01782 575727
 Fax: 01782 575641

26 Colquhoun Avenue
 Hillington
 Glasgow G52 4BN
 Tel: 0141 880 1200
 Fax: 0141 880 1212

4 Waterloo Industrial Estate
 Flanders Road
 Hedge End
 Southampton SO30 2QT
 Tel: 01489 779700
 Fax: 01489 779701

3 - 4 Cardiff Trade Park
 Hadfield Road
 Cardiff CF11 8AQ
 Tel: 02920 390146
 Fax: 02920 224356

2 City Park Industrial Estate
 Gelderd Road
 Leeds LS12 6DR
 Tel: 0113 224 4630
 Fax: 0113 224 4631

Trade Counters & Showrooms

1A - 1B Alexander Place
 Lower Park Road
 New Southgate
 London N11 1QD
 Tel: 020 8361 6050
 Fax: 020 8361 4757

14 Meridian Trading Estate
 Bugsby Way, Charlton
 London SE7 7SJ
 Tel: 020 8269 5960
 Fax: 020 8269 5961

Units 10 - 11, 14 - 15
 Advent Way, Edmonton
 London N18 3AF
 Tel: 020 8586 4600
 Fax: 020 8586 4646

8 Ascent Park
 Edinburgh Way,
 Harlow Essex CM20 2HW
 Tel: 01279 621980
 Fax: 01279 621981

1 Cliffside Trade Park
 Motherwell Way,
 Lakeside, West Thurrock
 Essex RM20 3XD
 Tel: 01708 680180
 Fax: 01708 680181

2 - 5 Albarn Close
 Wyncolls Road
 Severalls Park, Colchester
 Essex CO4 9HY
 Tel: 01206 844 161
 Fax: 01206 845 878

9 - 11 McDonalds
 Business Park, Maylands
 Hemel Hempstead
 Hertfordshire HP2 7EB
 Tel: 0845 2606 025
 Fax: 0845 2606 026

16 Arlington Business Park
 Whittle Way, Stevenage
 Hertfordshire SG1 2BD
 Tel: 01206 849 322
 Fax: 01438 740 338

8D Pompey Centre, Fratton Way
 Southsea, Portsmouth PO4 8TA
 Tel: 02392 894599
 Fax: 02392 894598

5 Tower Court, St David's Road
 Swansea Enterprise Park
 Swansea SA6 8RU
 Tel: 01792 797337
 Fax: 01792 774019

Nicholls & Clarke

— Est 1875 —