



Description

Thermostatic shower column with built-in wax thermoelement, shower head, rail with slider hand shower bracket and SMART multifunction hand shower. Connections of 1/2" and a distance of 150±15mm between them. It includes a non-return valve and safety stop at 38°. The flow rate at 3 bar of the hand shower is 11,11 l/min and of the shower head 8,7 l/min.


Finish



chrome
100093268

Flow rate diagramme

Pressure (bar)	0	0.5	1	2	3	4	5
Flow - Handshower (l/min) (±15%)	0	3.9	6	8.9	11.1	12.9	14.7
Flow - rain (l/min) (±15%)	0	3.9	5.9	7.9	8.7	8.7	9.2

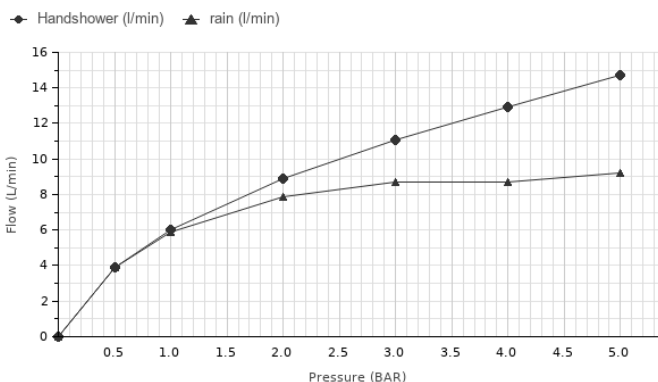

Technical drawing

Dimensions in mm

