



tile & stone
Installation System

ARDEX GROUT Color Chart



2012 Summer Olympics, London Aquatics Centre. London, England.
ARDEX X 77™ Thin Set Mortar and ARDEX FL™ Grout



AMERICAS

ARDEX FL™ Rapid Set, Flexible Sanded Grout

A highly versatile, rapid-setting sanded grout that feels and trowels like an unsanded grout. Very easy to use and suitable for floor or wall tiles in exterior or interior applications. Ideal for commercial and residential uses including swimming pools, showers and kitchens.

- Use with porcelain, glass, quarry, ceramic, mosaic and most natural stone tiles
- Accepts traffic in just 90 minutes
- Grout joints 1/8" to 3/4" (3 mm - 15 mm)
- No slake time required
- Stain resistant and water repellent
- Freeze/thaw resistant



ARDEX FG-C™ MICROTEC® Unsanded Floor & Wall Grout

A high performance, Portland cement-based, unsanded grout with a creamy, smooth easy-to-use consistency that delivers fuller, stronger and more aesthetically appealing grout joints with an ultra-smooth finish for floor and wall interior or exterior applications. With its flexibility and high strength, ARDEX FG-C is ideal for interior and exterior floors, walls, countertops and showers.

- Use with porcelain, glass, quarry, ceramic, mosaic and most natural stone tiles
- Grout joints up to 1/4" (6 mm)
- Open to traffic in just 4 hours
- Excellent bond and shear strength
- Highly flexible; resists cracking
- Mold and mildew resistant
- Freeze/thaw stable
- Unaffected by water



Polar White 01

Fresh Lily 02

Sugar Cookie 03

Antique Ivory 04

Winter White 05

Classic Vanilla 06

Floating Driftwood 07

Vintage Linen 08


Natural Almond 09

Irish Creme 10

Barley 11

Wild Mushroom 12

Stone Beach 13

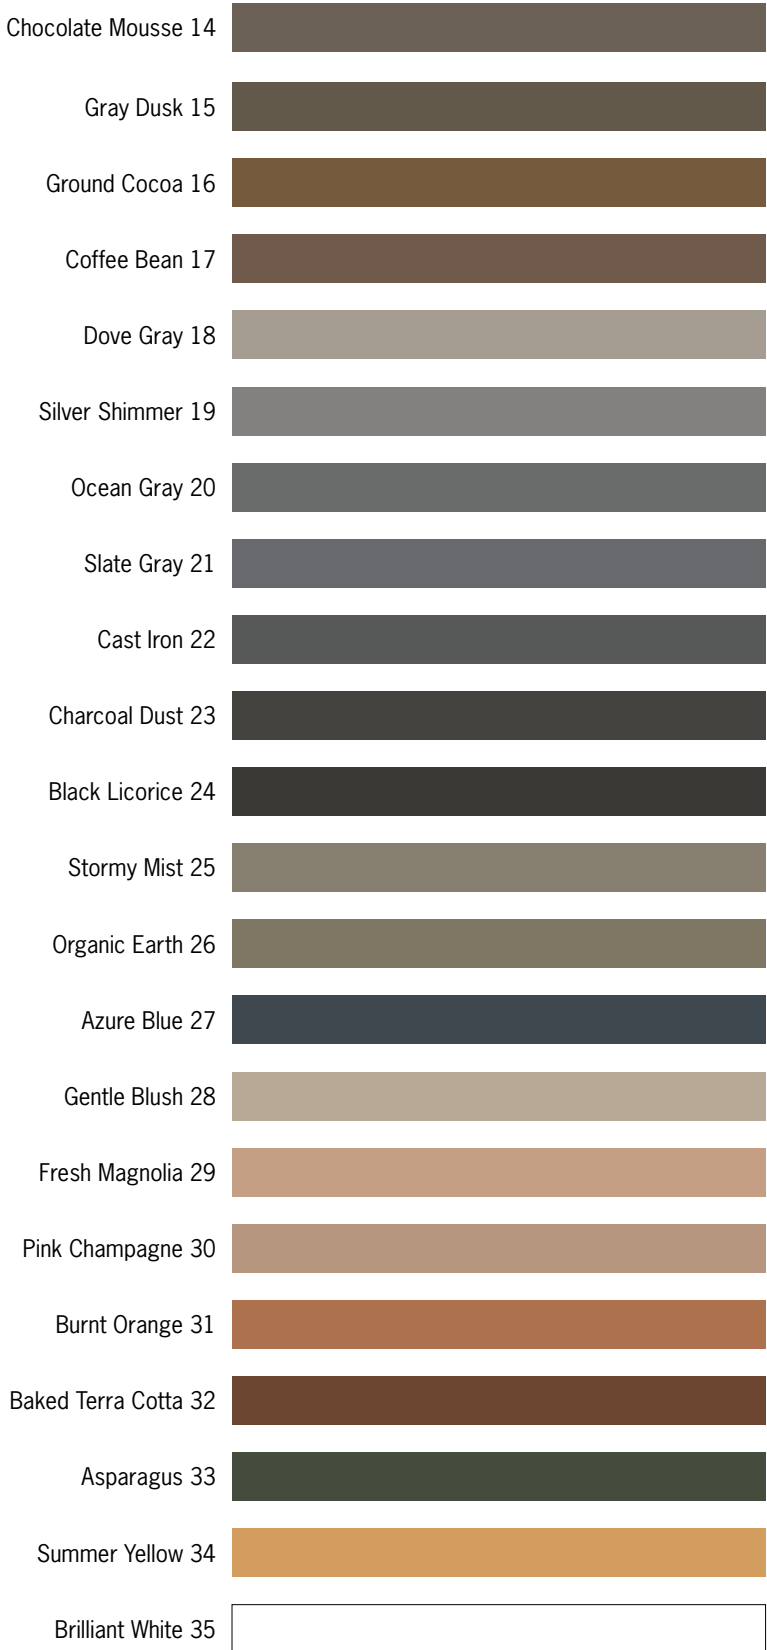

Due to variations in printing processes, colors are approximate. Please refer to ARDEX Grout Kits for more accurate color comparisons. Types of tile, substrate and installation environment may cause color variation.





ARDEX FL™ Rapid Set Flexible Sanded Grout Coverage Chart

Grout Joint Size - Square Feet

Tile Size	1/8" 0.125	3/16" 0.188	1/4" 0.25	5/16" 0.313	3/8" 0.375	7/16" 0.438	1/2" 0.5
1" x 1" x 1/4"	47.5	32.7	25.5	21.1	18.3	16.3	14.9
2" x 2" x 1/4"	92.0	62.2	47.5	38.6	32.8	28.6	25.5
4-1/4" x 4-1/4" x 5/16"	153.5	102.8	77.9	62.7	52.7	45.5	40.2
4" x 8" x 1/2"	120.1	80.3	60.7	48.7	40.9	35.2	31.0
6" x 6" x 1/2"	135.1	90.3	68.3	54.8	46.0	39.6	34.9
8" x 8" x 3/8"	239.5	159.9	120.7	96.8	81.1	69.7	61.3
12" x 12" x 3/8"	358.3	238.9	180.1	144.2	120.7	103.6	91.0
13" x 13" x 3/8"	388.0	258.6	194.9	156.1	130.6	112.1	98.4
16" x 16" x 3/8"	477.1	317.9	239.5	191.7	160.3	137.5	120.7
18" x 18" x 3/8"	536.5	357.4	269.2	215.4	180.1	154.5	135.5
24" x 24" x 3/8"	714.8	475.9	358.3	286.6	239.5	205.3	180.1

ARDEX FG-C™ MICROTEC® Unsanded Floor & Wall Grout Coverage Chart

Grout Joint Size - Square Feet

Tile Size	1/16" 0.0625	1/8" 0.125	3/16" 0.188	1/4" 0.25
1" x 1" x 1/4"	97.3	50.3	34.6	26.9
2" x 2" x 1/4"	191.4	97.3	65.7	50.3
4-1/4" x 4-1/4" x 5/16"	322.2	162.3	108.7	82.4
4" x 8" x 1/2"	252.6	127.0	84.9	64.2
6" x 6" x 1/2"	284.1	142.8	95.5	72.2
8" x 8" x 3/8"	504.5	253.2	169.0	127.6
12" x 12" x 3/8"	755.7	378.9	252.6	190.4
13" x 13" x 3/8"	818.6	410.3	273.5	206.1
16" x 16" x 3/8"	1007.0	504.5	336.1	253.2
18" x 18" x 3/8"	1132.6	567.3	377.9	284.6
24" x 24" x 3/8"	1509.5	755.7	503.2	378.9

Coverage based on 25 lb. bags. Coverage may vary based on jobsite conditions and installation method. Please refer to individual product technical data sheets www.ardexamericas.com

For easy-to-use ARDEX Product Calculators and Product Information On the Go, download the ARDEX App at the iTunes Store or the Android Marketplace.



888-512-7339
www.ardexamericas.com