

# 400HLBMT CUTTER-HEAD GT



## FRONT



## MOUNTED



Designed for small tractors with a boom arm and small excavators / track hoes

ph: (843) 879-0208 | Fax: (843) 879-0218 | e: sales@gyrotrac.com

**CALL FOR A DEMO TODAY!**

www.gyrotrac.com | toll free +1 (866) 800-3900  
Copyright © 2023 Gyro-Trac Corporation. All rights reserved.

## DIMENSIONS

Cutting Width	49 in (125 cm)
Width	60 in (152 cm)
Depth	30 in ( 76 cm)
Height	25 in ( 64 cm)
Weight	990 lbs. (450 kg)

## SPECIFICATIONS

No. of Teeth	20 TEETH
Hyd. Flow up to	50 gpm (189 lpm)
Oper. Pressure up to	6000 psi ( 413 bar)
Tractor HP	60-110 HP (45-82 kw)

## CASE DRAIN RETURN PRESSURE

Maximum (continuous)	29 psi. (2 bar)
Intermittent (Cold Start)	89 psi. (6 bar)

**The only Heavy-Duty Cutter-Head on the market that weights less than 1,000 pounds and can handle hydraulic flows up to 50 gpm.**

### ALWAYS THE FIRST, ALWAYS THE BEST

Gyro-Trac introduced the first front attachment with PLANAR teeth & controlled bite RIB in 2003. Gyro-Trac developed the trade name "PLANAR" tooth for mulching. Today, Gyro-Trac is first to introduce the *BEST*, most *ADVANCED* and *PATENTED* cutting technology.

### INTERNAL DRIVE MOTOR

US Pat. No. 7,980,278  
CA Pat. No. 2,597,973

### CONTROLLED BITE

US Pat. No. 7,810,531  
US Pat. No. 9,839,914  
CA Pat. No. 2,546,294


**LET THE FACTS SPEAK FOR THEMSELVES!**

### MOUNTING ASSEMBLY

US Pat. No. 7,810,531  
US Pat. No. 9,839,914  
CA Pat. No. 2,546,294

### MOUNTING STATION

US Pat. No. 7,810,531  
US Pat. No. 9,839,914  
CA Pat. No. 2,546,294

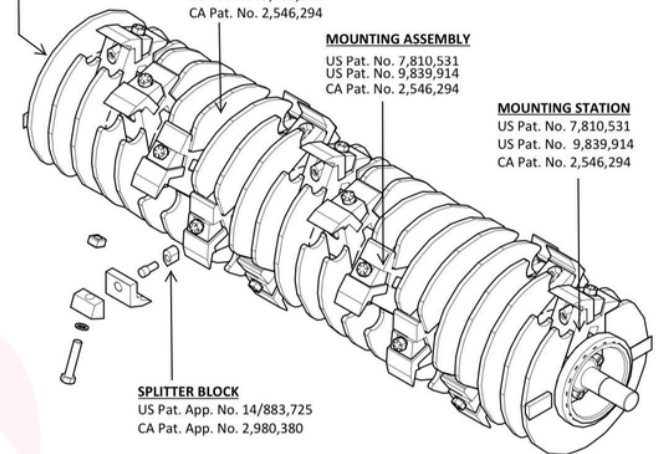

### SPLITTER BLOCK

US Pat. App. No. 14/883,725  
CA Pat. App. No. 2,980,380

\*Gyro-Trac owns over 20 Patents and Patents Pending, including the above Cutter-head Patents.

# SALES@GYROTRAC.COM

# 400 HL **BMT** CUTTER-HEAD

## ABOUT THE MACHINE

Gyro-Trac's **SABRE-TOOTH TITAN** cutting technology PULVERIZES Wood into Sawdust-like Mulch. The new **SABRE-TOOTH** design is the NEXT GENERATION of "disruptive technology", improving on Gyro-Trac's Planar tooth.

It begins with a **WIDER TOOTH**, held in place with a **WEDGED FRICTION BLOCK**, taking all the force off of the single bolt . **THAT'S RIGHT!** Only one bolt to quickly and easily replace worn teeth.

The **CONTROLLED BITE** is now achieved with **TWO** instead of one control rib under the tooth. The distance between control ribs is wider.

The **KNOCK-OUT RELIEF** that reduces resistance by allowing the wood chip to curl into the relief, now has a **SPLIT BLOCK** strategically placed to **SPLIT THE CHIP** and further **REDUCE** the size of the wood chip. This new design creates a **SELF-CLEANING** effect, clearing the tooth for the next bite.

*SABRE-TOOTH TITAN cutting technology PULVERIZES Wood into Sawdust-like Mulch*

With a perfectly tuned hydraulic recipe you can now understand how Gyro-Trac machines can **mulch more wood with Less Weight, Less Energy and Less Fuel** than any of our competitors. You can also understand how the smallest mulch in the business leaves behind that famous, Gyro-Trac "Park-Like effect", and the fine, rapidly biodegradable mulch just simply Won't Wick Fire, making a Gyro-Trac *the perfect machine for cutting fire breaks.*

**SALES@GYROTRAC.COM**