




Assembly Instruction

WARNING! PLEASE PLACE ALL THE PRODUCTS AT ROOM TEMPERATURE AND DO NOT STORAGE THE BIDETS AND ITS ACCESSORIES IN THE FREEZING TEMPERATURE ENVIRONMENT UNDER 0 DEGREE CELCIUS!

1. NAMES AND FUNCTIONS OF ACCESSORIES

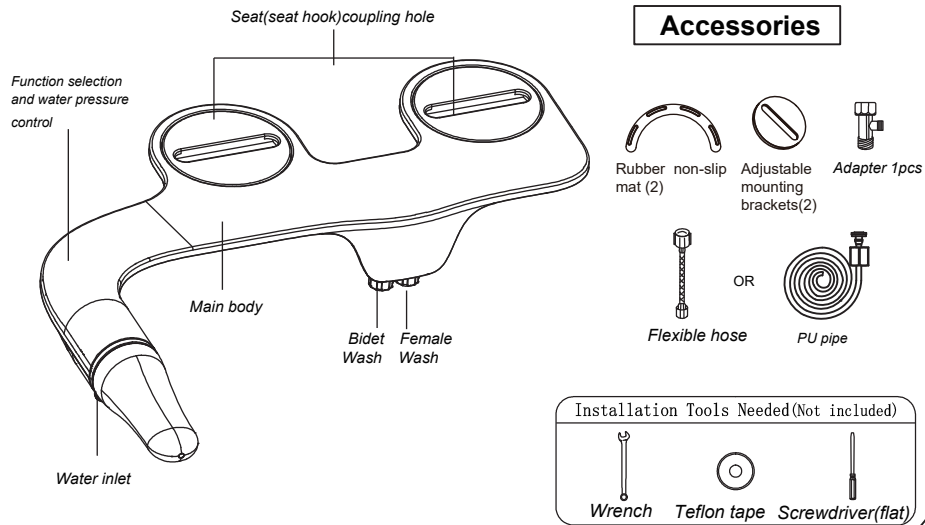


3. INSTALL RUBBER NON-SLIP MATS AND CIRCULAR MOUNTING BRACKETS INTO BIDET, AND INSTALL IT ON TOILET ADJUST IT IN SUITABLE POSITION

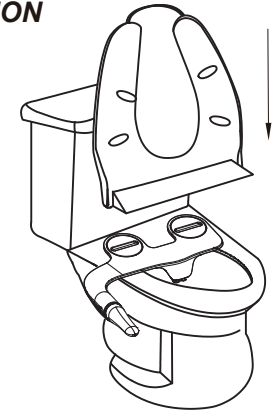

Insert the rubber non-slip mats to the bottom of the bidet and place the circular mounting brackets into the bidet attachment.

4. FINAL ASSEMBLED FIGURE

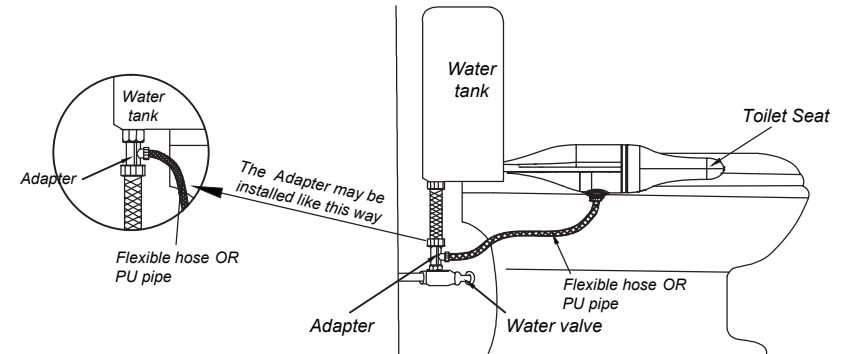


2. INSTALLATION

PREPARATION

- A. Remove the existing toilet seat.
- B. Turn off the water valve.
- C. Flush toilet to drain tank completely.
- D. Take out exiting water pipe.

Installation (please choose a suitable installation)

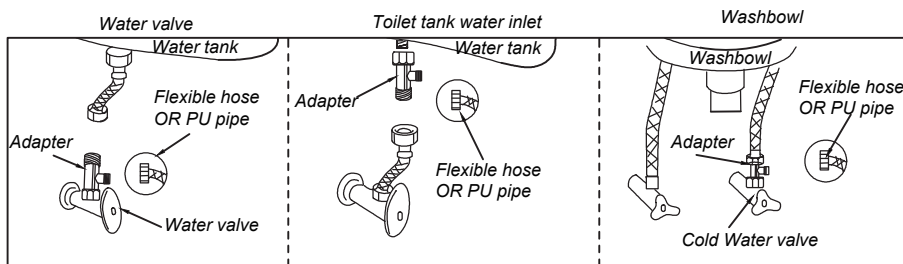


TRYING FOR THE FIRST TIME

Congratulations! You are ready to use for the first time. Adjust the function selection and water pressure control knob, choose the comfortable pressure you want. Note: function selection and water pressure control knob couldn't reset automatically, please turn it off manually.

TROUBLE SHOOTING

Twin Nozzle system



If your spray outlet hole is clogged for some reason, simply try to move spray outlet up and down for a few times manually.

HELPFUL TIP:

Over tightening can cause damage to the threads and result in water leakage. Use only hand pressure first and check for any leakage. Turn only less than quarter turn at a time making sure there is no leakage.