


SECTION: _____

 PART: _____



PRODUCT SUBMITTAL DATA

Photoluminescent Direction Flow Tape

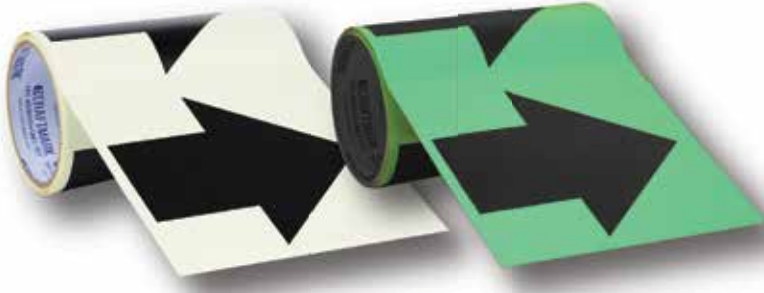

Photoluminescent direction flow tape is perfect for indicating direction of flow in piping which may be prone to loss of power. Tape meets ASME specification for arrow height but not color, as these are only available in the light green background. Glows for up to 10 hours. Contrasting black arrows.

SIZE	1/2"	1"	2"	4"	6"
Use with Marker	1XSM	1SM	1	1LG	1XLG
Stock#	GAT100	GAT101	GAT102	GAT103	GAT104

FEATURES

- Indoor/outdoor use
- Arrow height meets ASME specification
- Matching DuraMark™ P pipe markers available
- Durable, premium grade, indoor/outdoor vinyl
- Rugged UV screen inks
- Excellent adhesion to piping & insulation
- Gloss: 35 Gardner Units
- Thickness: .023"

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____

Photoluminescent Direction Flow Tape (Continued)

ADHESIVE: Permanent, aggressive acrylic pressure sensitive adhesive adhesive. Sticks to most pipe and pipe covering materials.

SURFACE PREPARATION: Surface should be dry, oil free, dirt free and above the minimum application temperature.

SERVICE TEMPERATURE: -40°F to 200°F (-40°C to 93°C)

APPLICATION TEMPERATURE: Minimum application temperature of 50°F (10°C)

AVERAGE OUTDOOR DURABILITY: 3-5 years outdoor - mid continental U.S.

CHEMICAL RESISTANCE: Good

MOISTURE RESISTANCE: EXCELLENT moisture resistance.

ABRASION RESISTANCE: VERY GOOD abrasion resistance.

GLOSS: 40 Gardner units (20° test)

STORAGE STABILITY: 2 years typical at 70°F (21°C) at 50% relative humidity

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____
