


SECTION: _____

 PART: _____



PRODUCT SUBMITTAL DATA

RollMark™ IV CV Self-Stick Rollform Conduit & Voltage Marker

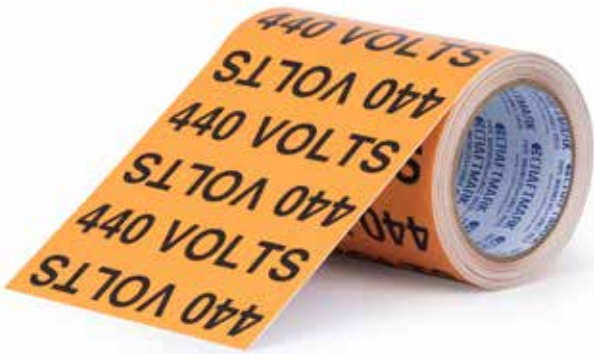

DESCRIPTION: Self-adhesive rolls of preprinted stock and custom pipe markers. Typical use would be for 360° wrap-around marking of pipe.

USE: Use to identify piping systems. Designed for all pipe marking jobs. 30' rolls.

COMPLIANCE: Complies 100% to ASME (ANSI) A13.1-2020 Scheme for the Identification of Piping Systems for color, color field width & letter size. Complies with ANSI Z535.1 Safety Color Code

•**LEED Compliance:** This product is in compliance with Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule#1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC).

•UL94-Test for Flammability of plastic materials 94V-0

RollMark™ IV is a great self-stick marking system that is cut to size on the job site. Great for any pipe marking job. Markers are printed with ultra durable vinyl for wrap-around applications.

FEATURES:

- Ultra durable self-stick vinyl for indoor/outdoor use.
- Available in four popular widths 4", 6", 8", 12" to handle any marking requirement. 30' long rolls.
- Legends continuously repeated.
- 360° Visibility
- Custom legends/colors available.

•STANDARD COLORS

Black on Orange Background

•RollMark™ IV Application Guide

Style 4
4" Wide 1/2" Letters

Style 6
6" Wide 3/4" Letters

Style 8
8" Wide 3/4" Letters

Style 12
12" Wide 1 1/4" Letters

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____

RollMark™ IV CV Self-Stick Rollform Conduit & Voltage Marker (Continued)

ADHESIVE: Permanent, aggressive acrylic pressure sensitive adhesive. Sticks to most pipe and pipe covering material.

SURFACE PREPARATION: Surface should be dry, oil free, dirt free and above the minimum application temperature .

SERVICE TEMPERATURE: -40°F to 200°F (-40°C to 93°C)

APPLICATION TEMPERATURE: Minimum application temperature of 50°F (10°C)

AVERAGE OUTDOOR DURABILITY: 5 years outdoor - mid continental U.S.

CHEMICAL RESISTANCE: VERY GOOD

MOISTURE RESISTANCE: EXCELLENT MOISTURE RESISTANCE

ABRASION RESISTANCE: VERY GOOD ABRASION RESISTANCE

GLOSS: 40 Gardner units (20° test)

STORAGE STABILITY: 2 years typical at 70°F (21°C) at 50% relative humidity.

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____