	SECTION:
3	PART:
SU	



PRODUCT SUBMITTAL DATA SpecMark™ CV Snap On™ Conduit & Voltage Markers



sheet that are designed to snap around the pipe and stay there without need for adhesive. <u>USE:</u> For marking all varieties of pipe-especially rusty, wet, damp, oily or espe-

<u>OSE:</u> For marking all varieties of pipe-especially rusty, wet, damp, oily or especially dirty pipe. Also used as a labor saver on installations. Use indoor or outdoor. <u>COMPLIANCE:</u> Complies 100% to ASME (ANSI) A13.1-2020 Scheme for the Identification of Piping Systems for color, color field width & letter size. Complies with ANSI Z535.1 Safety Color Code

DESCRIPTION: SpecMark[™] (sizes AA-F) are precoiled & pretensioned printed

•LEED Compliance: This product is in compliance with Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule#1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC).

•UL94-Test for Flammability of plastic materials 94V-0

SpecMark[™] Precoiled & Pretensioned Plastic Markers save installation time and labor costs!

Craftmark's SpecMark™ conform 100% to

ASME (ANSI) A13.1-2020 Standard "Scheme for the Identification of Piping Systems". We use only the most durable materials and UV screen inks. These durable markers are used on wet, oily, cold, dirty, or rusty pipes, where pressure sensitives won't stick! No preparation of the pipe surface is required before application so valuable labor time is saved!

FEATURES


- Meets ASME (ANSI) A13.1-2020 Standard-100%
- No pipe preparation necessary.
- 360° visibility-Styles AA-E
- Installs quickly in new and existing facilities.
- Can be removed and re-used.
- Choose from over 300 stock legends.
- Available in 6 standard coiled sizes.
- Sizes to fit 3/8" thru 5.875"
- Coiled plastic is lightweight yet durable.
- · Coiled marker snaps around pipe with ease.
- Heavy 20 mil vinyl on sizes AA-B.
- Super Heavy-duty 30mil vinyl on sizes C, D, E.
- Custom available with no set-up charges or hidden minimum orders. Order 1 with no set-up charge!

JOB:

•STANDARD COLORS

Black on Orange Background

SpecMark[™] Application Guide

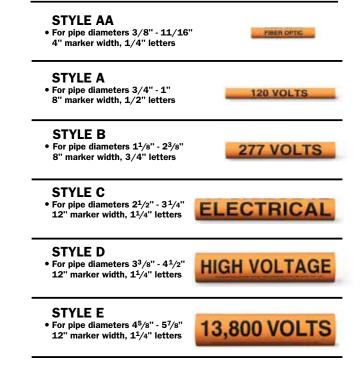

DATE:<u>//</u>

CONTRACTOR:

ADHESIVE: N/A - No need for adhesive

SURFACE PREPARATION: NONE NEEDED - A huge labor saver!!

SERVICE TEMPERATURE: Sizes A-H -40°F to 180°F (-40°C to 82°C)

APPLICATION TEMPERATURE: N/A

AVERAGE OUTDOOR DURABILITY: 5-8 years average. Results vary based on locations, environmental conditions & varies with background color.

CHEMICAL RESISTANCE: Excellent resistance to most petroleum solvents and low aliphatic alcohols.

MOISTURE RESISTANCE: EXCELLENT

ABRASION RESISTANCE: EXCELLENT

GLOSS: 60 units (20° test)

STORAGE STABILITY: Indefinite storage & shelf life when stored at 70°F (21°C) and relative humidity.

WARRANTY: Craftmark Pipe Marker products are sold with the understanding that the buyer will test them in actual use and determine for himself their adaptability for his intended use in his geographic location. Craftmark Pipe Markers warrants to the buyer that its products are free from defects in material & workmanship, but limits its obligation to replacement of the product only. This warranty is in lieu of any other warranty, expressed or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular use, and of any other obligations or liability on Craftmark Pipe Marker's part. Under no circumstance will Craftmark Pipe Markers be liable for any loss, damage, expense or consequential damages of any kind arising in connection with the use, or inability to use Craftmark Pipe Marker products.

DATE: / / JOB:_____

CONTRACTOR: