

# Dorus Hot Melt Adhesive KS 350/2




## EVA HOTMELT ADHESIVE FOR EDGEBOARDING – UNFILLED

### CHARACTERISTICS

- Medium viscosity
- Universal hotmelt adhesive
- Very clean working, produces tight joints virtually not visible
- High glue mileage
- Very good wetting
- Permits smooth surfaces even with very flexible edgebanding materials

### RECOMMENDED APPLICATIONS:

PVC\*, ABS\*, VENEER, POLYESTER, MELAMINE, HPL\*

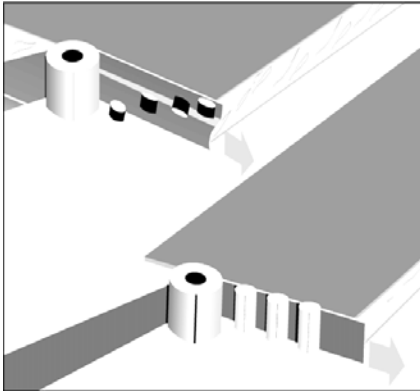

### TECHNICAL DATA:

Viscosity - (Brookfield) at 200°C	: 110,000 mPas
Softening Point	: 125°C
Heat Resistance	: 85°C

### DIRECTIONS FOR APPLICATION:

Processing Temperature	
• Application roller	: 190-210°C
• Melting container	: 190-210°C
Feed Speed	: 50ft./min.

### STOCK COLORS AVAILABLE:

CLEAR

### PACKAGING:

55 LB. SACKS

### SAFETY DATA:

Serious burns can result from contact with molten hot adhesives. Hot Melt vapors can irritate respiratory organs. Adequate ventilation should be provided.

### STORAGE:

Dorus Hot Melt is to be kept dry and cool and may be stored for at least 1 year.

*Statements made are based on our experience and tests. However, recommendations and suggestions are made without guarantee since the conditions of use are beyond our control. Please test and establish for yourself our product's suitability for your particular purposes.*

*\*Conditionally recommended applications: Suggest testing on specific application to determine suitability.*

Dorus is the registered trademark of Dorus Klebetechnik GmbH + Co KG.

7566 Bath Road, Mississauga, Ontario L4T 1L2  
350 West Armour Drive, South Holland, IL 60473

800-461-0061 or 905-673-5156  
800-426-6362 or 905-673-5156

FAX: 905-673-9372  
FAX: 905-673-9372

**DÖLKEN**  
**WOODTAPE**

A SURTECO COMPANY