



GO GETTER 2

Portable Sound System



Perfect for...

- Indoor & Outdoor Events
- Parks & Recreation
- Fitness Centers
- Schools
- Group Classes
- Houses of Worship
- Corporate Events
- Auctions
- Rental
- Cemeteries
- Funerals
- Libraries
- Camps
- and more!




TECH SPECS

- 109 dB of clear sound
- 80W AC/DC RMS
- 1.9 GHz wireless microphone frequency
- 300'+ wireless microphone range
- Two universal mic inputs
- 1/4" & 3.5 mm AUX line input
- 1/4" line output
- Built-in rechargeable Lithium Ion batteries
- One high output horn tweeter
- One 6.5" woven fiber woofer
- External speaker output powers optional Go Getter 2 companion speaker

FEATURES

- Reach crowds of 500+
- Connect up to four wireless mics
- Anchor AIR wireless companion speaker compatible
- Built-in Class 1 Bluetooth
- Built-in rechargeable batteries operate 11 - 15 hours on a single charge

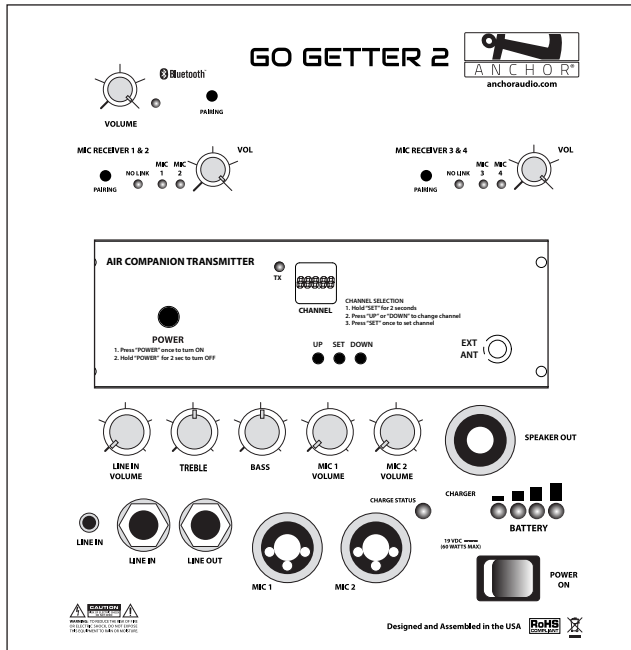

(GG2-XU4 Back Panel)

Go Getter 2 Models	
GG2	Go Getter 2 with built-in Bluetooth
GG2-U2	Go Getter 2 with built-in Bluetooth & dual wireless mic receiver
GG2-U4	Go Getter 2 with built-in Bluetooth & two dual wireless mic receivers
GG2-X	Go Getter 2 with built-in Bluetooth & AIR transmitter
GG2-XU2	Go Getter 2 with built-in Bluetooth, AIR transmitter & dual wireless mic receiver
GG2-XU4	Go Getter 2 with built-in Bluetooth, AIR transmitter & two dual wireless mic receivers
GG2-AIR	Go Getter 2 AIR wireless companion speaker
GG2-COMP	Go Getter 2 unpowered wired companion speaker
Microphones	
WH-LINK	Wireless handheld mic (1.9 GHz)
WB-LINK	Wireless belt pack transmitter (1.9 GHz)
HBM-LINK	Headband mic (3.5 mm plug)
CM-LINK	Collar mic (3.5 mm plug)
EM-LINK	UltraLite mic (3.5 mm plug)
LM-LINK	Lapel mic (3.5 mm plug)
MIC-90	Wired handheld mic with 20 ft. cable (XLR plug)

Technical Specifications	
Rated Power Output	80 Watts AC/DC RMS
Max SPL @ Rated Power	109 dB @ 1 meter
Frequency Response	50 Hz – 16 kHz ± 3 dB
Microphone Wireless Frequency	1.9 GHz DECT
Microphone Wireless Range	300' + line of sight
Mic Inputs	Lo-Z, balanced, XLR & 1/4" 12V DC condenser mic (phantom) power Hi-Z (10 KΩ), unbalanced, 1/4" phone
Line Inputs	Balanced Mono 1/4" & Unbalanced Stereo 3.5 mm
Line Output (post fader)	Isolated, 600Ω, 1/4" phone
Speaker Out	4-pole Neutrik Speakon® jack
DC Power	19 VDC, 60 watts max
Battery	One 12V LFP rechargeable battery, 7.5 AH
Dimensions (HWD)	18" x 11.5" x 9" (45.7 x 29.2 x 22.86 cm)
Weight	15 lbs / 6.7 Kg
Warranty	6 years
GG-AIR Technical Specifications	
AIR Frequency Range	902 - 928 MHz
AIR Wireless Range	300' + line of sight
Speaker In	4-pole Neutrik Speakon® input



(Features & Specifications Subject to Change Without Notice)

Designed and Assembled in the USA