


# CPVC Ball Check Valves

- Range:** Sizes from 20 mm to 110 mm (1/2"-4")
- Standards:** Available Standards: Metric, ASTM, British Standard, JIS.  
Threaded version: BSP & NPT
- Working Pressure:** At 20°C D20-D63 (1/2"-2") PN 16 (240 PSI@73F)  
D75-D110 (2 1/2"-4") PN 10 (150 PSI@73F)



## FEATURES:

- Easy installation and maintenance.
- For horizontal or vertical installations.
- Minimum back pressure: 0,2 bar (3 PSI).
- Available in PVC-U and Corzan® PVC-C.
- PVC-C: service temperatures up to 93° C (200F) and exceptional corrosion resistance.
- EPDM or Viton O-Rings.

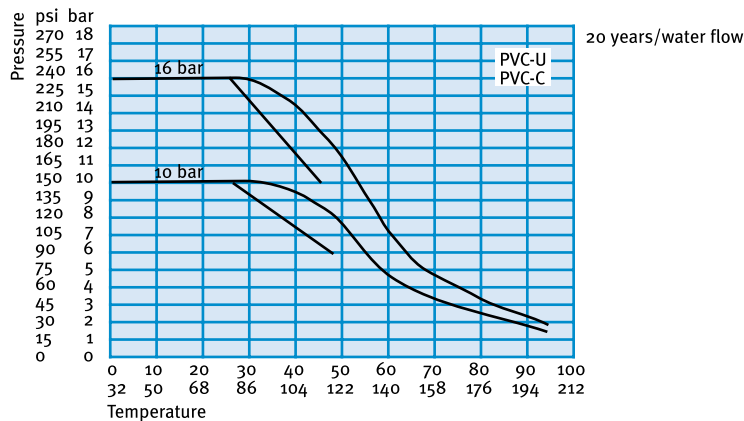



# JJD

JJ DOWNS INDUSTRIAL PLASTICS INC.

416.236.1884

JJDOWNS.COM

Toronto, ON

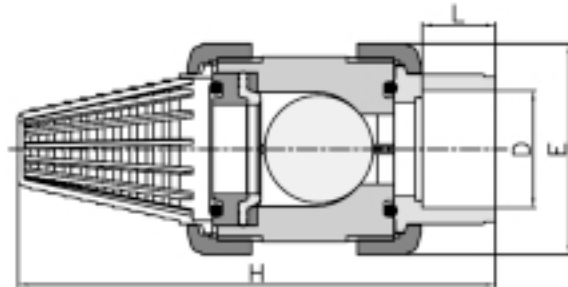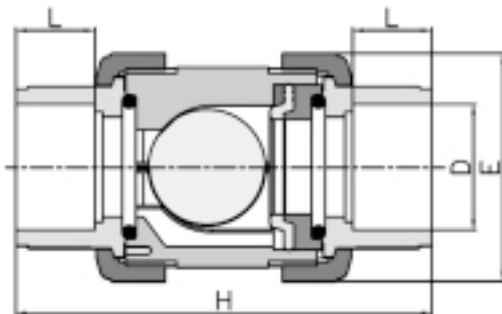

	D/G		L		H		E
mm	"	mm	"	mm	"	mm	"
20	1/2"	16	0.63	84	3.31	52	2.04
25	3/4"	19	0.79	108	4.25	62	2.44
32	1"	22	0.87	119	4.68	70	2.76
40	1 1/4"	26	1.02	142	5.60	84	3.31
50	1 1/2"	31	1.22	162	6.38	94	3.70
63	2"	38	1.50	192	7.55	117	4.60
75	2 1/2"	44	1.73	232	9.13	148	5.83
90	3"	51	2.01	269	10.60	179	7.05
110	4"	61	2.40	279	10.98	179	7.05

	D/G		L		H		E
mm	"	mm	"	mm	"	mm	"
20	1/2"	16	0.63	107	4.21	52	2.04
25	3/4"	19	0.79	130	5.12	62	2.44
32	1"	22	0.87	154	6.06	70	2.76
40	1 1/4"	26	1.02	176	6.93	84	3.31
50	1 1/2"	31	1.22	202	7.95	94	3.70
63	2"	38	1.50	239	9.41	117	4.60
75	2 1/2"	44	1.73	306	12.05	148	5.83
90	3"	51	2.01	363	14.25	179	7.05
110	4"	61	2.40	379	14.45	179	7.05