




Expansion Joints Product
Fabricated Expansion Joints

Fabricated Expansion Joints
Triple O-ring Sealed Telescoping Design
Available with 6" and 12" Travel



- Compact Installation - Eliminates Need For Expansion Loops
- EPDM or FKM Pressure O-ring Seal with Dual "Wiper" O-ring for Extended Life
- Support Piston Eliminates Binding, Minimizes Alignment Problems
- Excellent For Use as a Repair Coupling
- WHEN USED AS A REPAIR COUPLING MUST BE THRUST BLOCKED

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------

Fabricated Expansion Joints - PVC

6" Travel with EPDM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
2-1/2" - 12" 150 psi @ 73°F (23°C)
14" 100 psi @ 73°F (23°C)

826-005X6	1/2	6	10	0	085
826-007X6	3/4	6	6	0	085
826-010X6	1	6	5	0	085
826-012X6	1-1/4	6	4	0	085
826-015X6	1-1/2	6	4	0	085
826-020X6	2	6	2	0	085
826-025X6	2-1/2	6	1	0	085
826-030X6	3	6	1	0	085
826-040X6	4	6	1	0	085
826-060X6	6	6	1	0	085
826-080X6	8	6	1	0	085
826-100X6	10	6	1	0	085
826-120X6	12	6	1	0	085
826-140X6	14	6	1	0	085

FKM O-rings available on special order. Add a "V" preceding the dash (-) separator, e.g. 826V-005X6.

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------

Fabricated Expansion Joints - PVC

12" Travel with EPDM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
2-1/2" - 12" 150 psi @ 73°F (23°C)
14" 100 psi @ 73°F (23°C)

826-005X12	1/2	12	10	0	085
826-007X12	3/4	12	6	0	085
826-010X12	1	12	5	0	085
826-012X12	1-1/4	12	4	0	085
826-015X12	1-1/2	12	4	0	085
826-020X12	2	12	2	0	085
826-025X12	2-1/2	12	1	0	085
826-030X12	3	12	1	0	085
826-040X12	4	12	1	0	085
826-060X12	6	12	1	0	085
826-080X12	8	12	1	0	085
826-100X12	10	12	1	0	085
826-120X12	12	12	1	0	085
826-140X12	14	12	1	0	085

FKM O-rings available on special order. Add a "V" preceding the dash (-) separator, e.g. 826V-005X12

Fabricated Expansion Joints - CPVC

6" Travel with FKM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
2-1/2" - 12" 150 psi @ 73°F (23°C)
14" 100 psi @ 73°F (23°C)

826-005X6C	1/2	6	10	0	085
826-007X6C	3/4	6	6	0	085
826-010X6C	1	6	5	0	085
826-012X6C	1-1/4	6	4	0	085
826-015X6C	1-1/2	6	4	0	085
826-020X6C	2	6	2	0	085
826-025X6C	2-1/2	6	1	0	085
826-030X6C	3	6	1	0	085
826-040X6C	4	6	1	0	085
826-060X6C	6	6	1	0	085
826-080X6C	8	6	1	0	085
826-100X6C	10	6	1	0	085
826-120X6C	12	6	1	0	085
826-140X6C	14	6	1	0	085

EPDM O-rings available on special order. Add an "E" preceding the dash (-) separator, e.g. 826E-005X6C

Suitable for Oil-Free air handling to 25 psi, not for distribution of compressed air or gas

JJ DOWNS INDUSTRIAL PLASTICS INC.

416.236.1884
Toronto, ON
JJDOWNS.COM



Expansion Joints Product
Fabricated Expansion Joints & Elastomer Expansion Joints

Fabricated Expansion Joints

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------



Fabricated Expansion Joints - CPVC

12" Travel with FKM O-rings

1/2" - 2" 235 psi @ 73°F (23°C)
 2-1/2" - 12" 150 psi @ 73°F (23°C)
 14" 100 psi @ 73°F (23°C)

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
826-005X12C	1/2	12	10	0	085
826-007X12C	3/4	12	6	0	085
826-010X12C	1	12	5	0	085
826-012X12C	1-1/4	12	4	0	085
826-015X12C	1-1/2	12	4	0	085
826-020X12C	2	12	2	0	085
826-025X12C	2-1/2	12	1	0	085
826-030X12C	3	12	1	0	085
826-040X12C	4	12	1	0	085
826-060X12C	6	12	1	0	085
826-080X12C	8	12	1	0	085
826-100X12C	10	12	1	0	085
826-120X12C	12	12	1	0	085
826-140X12C	14	12	1	0	085

EPDM O-rings available on special order. Add an "E" preceding the dash (-) separator, e.g. 826E-005X12C

Elastomer Expansion Joints
PVC & CPVC Schedule 80 Elastomer Expansion Joint



Designed to allow for the expansion, contraction, lateral and angular movement of a piping system. Aids in noise and vibration dampening.

- Convenient, Double Union End Connections with Strong, Buttress Thread Union Nuts
- Internal Nylon Cord Reinforced Elastomer Bellows Tube
- Chemically Resistant Neoprene Elastomer with Optional EPDM Tube Available
- Double Spherical Arch Bellows Provides Improved Movement Capability
- Pressure rated to 150 psi @ 73°F (23°C)
- Suitable for Vacuum Service
- Available in Socket or Spears® Special Reinforced (SR) Female Plastic Thread End Connectors, IPS Sizes 3/4" through 3"

Part Number	Size	Std Pk	Mstr Ctn	Prod Code
-------------	------	--------	----------	-----------

Elastomer Expansion Joint - PVC



PVC with Neoprene Bellows Socket

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code
EJ02-007	3/4	10	0	085
EJ02-010	1	10	0	085
EJ02-012	1-1/4	15	0	085
EJ02-015	1-1/2	10	0	085
EJ02-020	2	8	0	085
EJ02-025	2-1/2	4	0	085
EJ02-030	3	2	0	085

Elastomer Expansion Joints - PVC



PVC with EPDM Bellows Socket

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code
EJ22-007	3/4	10	0	085
EJ22-010	1	10	0	085
EJ22-012	1-1/4	15	0	085
EJ22-015	1-1/2	10	0	085
EJ22-020	2	8	0	085
EJ22-025	2-1/2	4	0	085
EJ22-030	3	2	0	085

Elastomer Expansion Joint - PVC



PVC with Neoprene Bellows SR Fipt - Stainless Steel Collar

150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

Part Number	Size	Std Pk	Mstr Ctn	Prod Code
EJ01-007SR	3/4	10	0	085
EJ01-010SR	1	10	0	085

Suitable for Oil-Free air handling to 25 psi, not for distribution of compressed air or gas

JJ DOWNS INDUSTRIAL PLASTICS INC.

416.236.1884
Toronto, ON
JJDOWNS.COM



Expansion Joints Product
Elastomer Expansion Joints & Repair Couplings

Elastomer Expansion Joints

Part Number	Size	Std Pk	Mstr Ctn	Prod Code
Elastomer Expansion Joint - PVC (continued)				
PVC with Neoprene Bellows SR Fipt - Stainless Steel Collar				
EJ01-012SR	1-1/4	15	0	085
EJ01-015SR	1-1/2	10	0	085
EJ01-020SR	2	8	0	085
EJ01-025SR	2-1/2	4	0	085
EJ01-030SR	3	2	0	085

Elastomer Expansion Joint - PVC

PVC with EPDM Bellows SR Fipt - Stainless Steel Collar



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007SR	3/4	10	0	085
EJ21-010SR	1	10	0	085
EJ21-012SR	1-1/4	15	0	085
EJ21-015SR	1-1/2	10	0	085
EJ21-020SR	2	8	0	085
EJ21-025SR	2-1/2	4	0	085
EJ21-030SR	3	2	0	085

Elastomer Expansion Joint - CPVC

CPVC with EPDM Bellows Socket



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ22-007C	3/4	10	0	085
EJ22-010C	1	10	0	085
EJ22-012C	1-1/4	15	0	085
EJ22-015C	1-1/2	10	0	085
EJ22-020C	2	8	0	085
EJ22-025C	2-1/2	4	0	085
EJ22-030C	3	2	0	085

Elastomer Expansion Joint - CPVC


CPVC with EPDM Bellows SR Fipt - Stainless Steel Collar



150 psi Maximum Internal Pressure Rating @ 73°F (23°C)

EJ21-007CSR	3/4	10	0	085
EJ21-010CSR	1	10	0	085
EJ21-012CSR	1-1/4	15	0	085
EJ21-015CSR	1-1/2	10	0	085
EJ21-020CSR	2	8	0	085
EJ21-025CSR	2-1/2	4	0	085
EJ21-030CSR	3	2	0	085

Repair Couplings

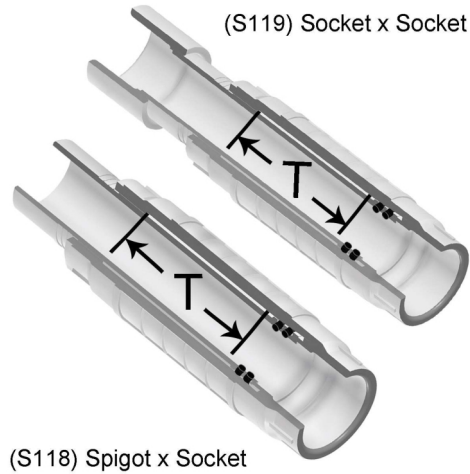


- Multi-function Telescoping Design
- Regular and Short configurations
- Socket x Socket Configuration for Pipe Repair or Use as a Short-Stroke Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use
- Double O-ring Seal in EPDM or high-grade FKM
- 1/2" - 2" Pressure Rated to 235 PSI @ 73°F (23°C)
- 2-1/2" - 4" Pressure Rated to 200 PSI @ 73°F (23°C)
- 6" Pressure Rated to 150 PSI @ 73°F (23°C)
- NSF® Certified for Potable Water Use

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------

Repair Coupling - Spigot x Socket

PVC White with EPDM O-ring



Can be used as short-stroke Expansion Joint

S118-05	1/2	2-7/8	25	0	025
S118-07	3/4	4	30	0	025
S118-10	1	4-1/16	15	0	025

Suitable for Oil-Free air handling to 25 psi, not for distribution of compressed air or gas

JJ DOWNS INDUSTRIAL PLASTICS INC.

416.236.1884

Toronto, ON

JJDOWNS.COM

international association
of plastics distribution



Expansion Joints Product
Repair Couplings & Short Repair Couplings

Repair Couplings

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------

Repair Coupling - Spigot x Socket (continued)

PVC White with EPDM O-ring

S118-12	1-1/4	4-1/16	25	0	025
S118-15	1-1/2	3-13/16	25	0	025
S118-20	2	4-5/16	12	0	025
S118-25	2-1/2	5-9/16	5	0	025
S118-30	3	5-9/16	4	0	025
S118-40	4	6-3/16	2	0	025
S118-60	6	6-5/8	1	0	025

Unit Must Be Thrust Blocked
T = Repair Coupling Travel



Repair Coupling - Socket x Socket

PVC White with EPDM O-ring

Can be used as short-stroke Expansion Joint

S119-05	1/2	2-7/8	30	0	025
S119-07	3/4	4	24	0	025
S119-10	1	4-1/16	20	0	025
S119-12	1-1/4	4-1/16	10	0	025
S119-15	1-1/2	3-13/16	16	0	025
S119-20	2	4-5/16	10	0	025
S119-25	2-1/2	5-9/16	5	0	025
S119-30	3	5-9/16	4	0	025
S119-40	4	6-3/16	2	0	025
S119-60	6	6-5/8	1	0	025

Unit Must Be Thrust Blocked
T = Repair Coupling Travel

Short Repair Couplings

Space Saving, Compact Version of Standard Repair Coupling
 Requires 1/3 less Space



Repair Coupling - Short, Spigot x Socket

PVC White with EPDM O-ring

SH118-05	1/2	1-15/16	36	0	025
SH118-07	3/4	2-3/16	30	0	025
SH118-10	1	2	35	0	025
SH118-12	1-1/4	2-1/2	25	0	025
SH118-15	1-1/2	2-1/2	32	0	025
SH118-20	2	3	15	0	025

Unit Must Be Thrust Blocked
T = Repair Coupling Travel

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------

Repair Coupling - Short, Socket x Socket

PVC White with EPDM O-ring

SH119-05	1/2	1-15/16	40	0	025
SH119-07	3/4	2-3/16	30	0	025
SH119-10	1	2	30	0	025
SH119-12	1-1/4	2-1/2	20	0	025
SH119-15	1-1/2	2-1/2	21	0	025
SH119-20	2	3	12	0	025

Unit Must Be Thrust Blocked
T = Repair Coupling Travel



Suitable for Oil-Free air handling to 25 psi, not for distribution of compressed air or gas

JJ DOWNS INDUSTRIAL PLASTICS INC.


416.236.1884
Toronto, ON
JJDOWNS.COM



Expansion Joints Product
CTS CPVC Expansion Joint/Repair Coupling

CTS CPVC Expansion Joint/Repair Coupling

(118) Socket X Socket

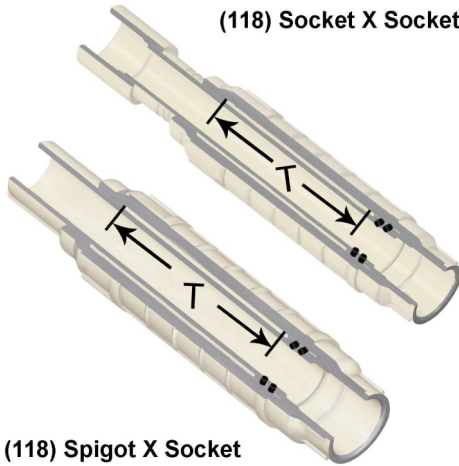

(118) Spigot X Socket

- Multi-function Telescoping Design
- Socket x Socket Configuration for Pipe Repair or Use as an Expansion Joint
- Spigot x Socket Configuration for Replacing Damaged Fittings
- Both Configurations can be Easily Modified for Opposite Use
- Double O-ring Seal in EPDM
- Pressure Rated to 100 PSI @ 180°F (82°C)
- NSF® Certified for Potable Water Use

Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------

Expansion Joint/Repair Couplings - Socket x Socket

CPVC With EPDM O-Rings

NSF® Certified Lead Free

CTS119-07	3/4	2-17/32	30	0	027
CTS119-10	1	3-29/32	24	0	027

**Unit Must Be Thrust Blocked
 T = Repair Coupling Travel**



Part Number	Size	Travel - T	Std Pk	Mstr Ctn	Prod Code
-------------	------	------------	--------	----------	-----------


Expansion Joint/Repair Couplings - Socket x Spigot

CPVC With EPDM O-Rings

NSF Certified Lead Free

CTS118-07	3/4	3-29/32	30	0	027
CTS118-10	1	3-29/32	35	0	027

**Unit Must Be Thrust Blocked
 T = Repair Coupling Travel**



Suitable for Oil-Free air handling to 25 psi, not for distribution of compressed air or gas

JJ DOWNS INDUSTRIAL PLASTICS INC.

416.236.1884
Toronto, ON
JJDOWNS.COM