


## Removable Jewellery Clasp

# Length Adjustment (no tools required)

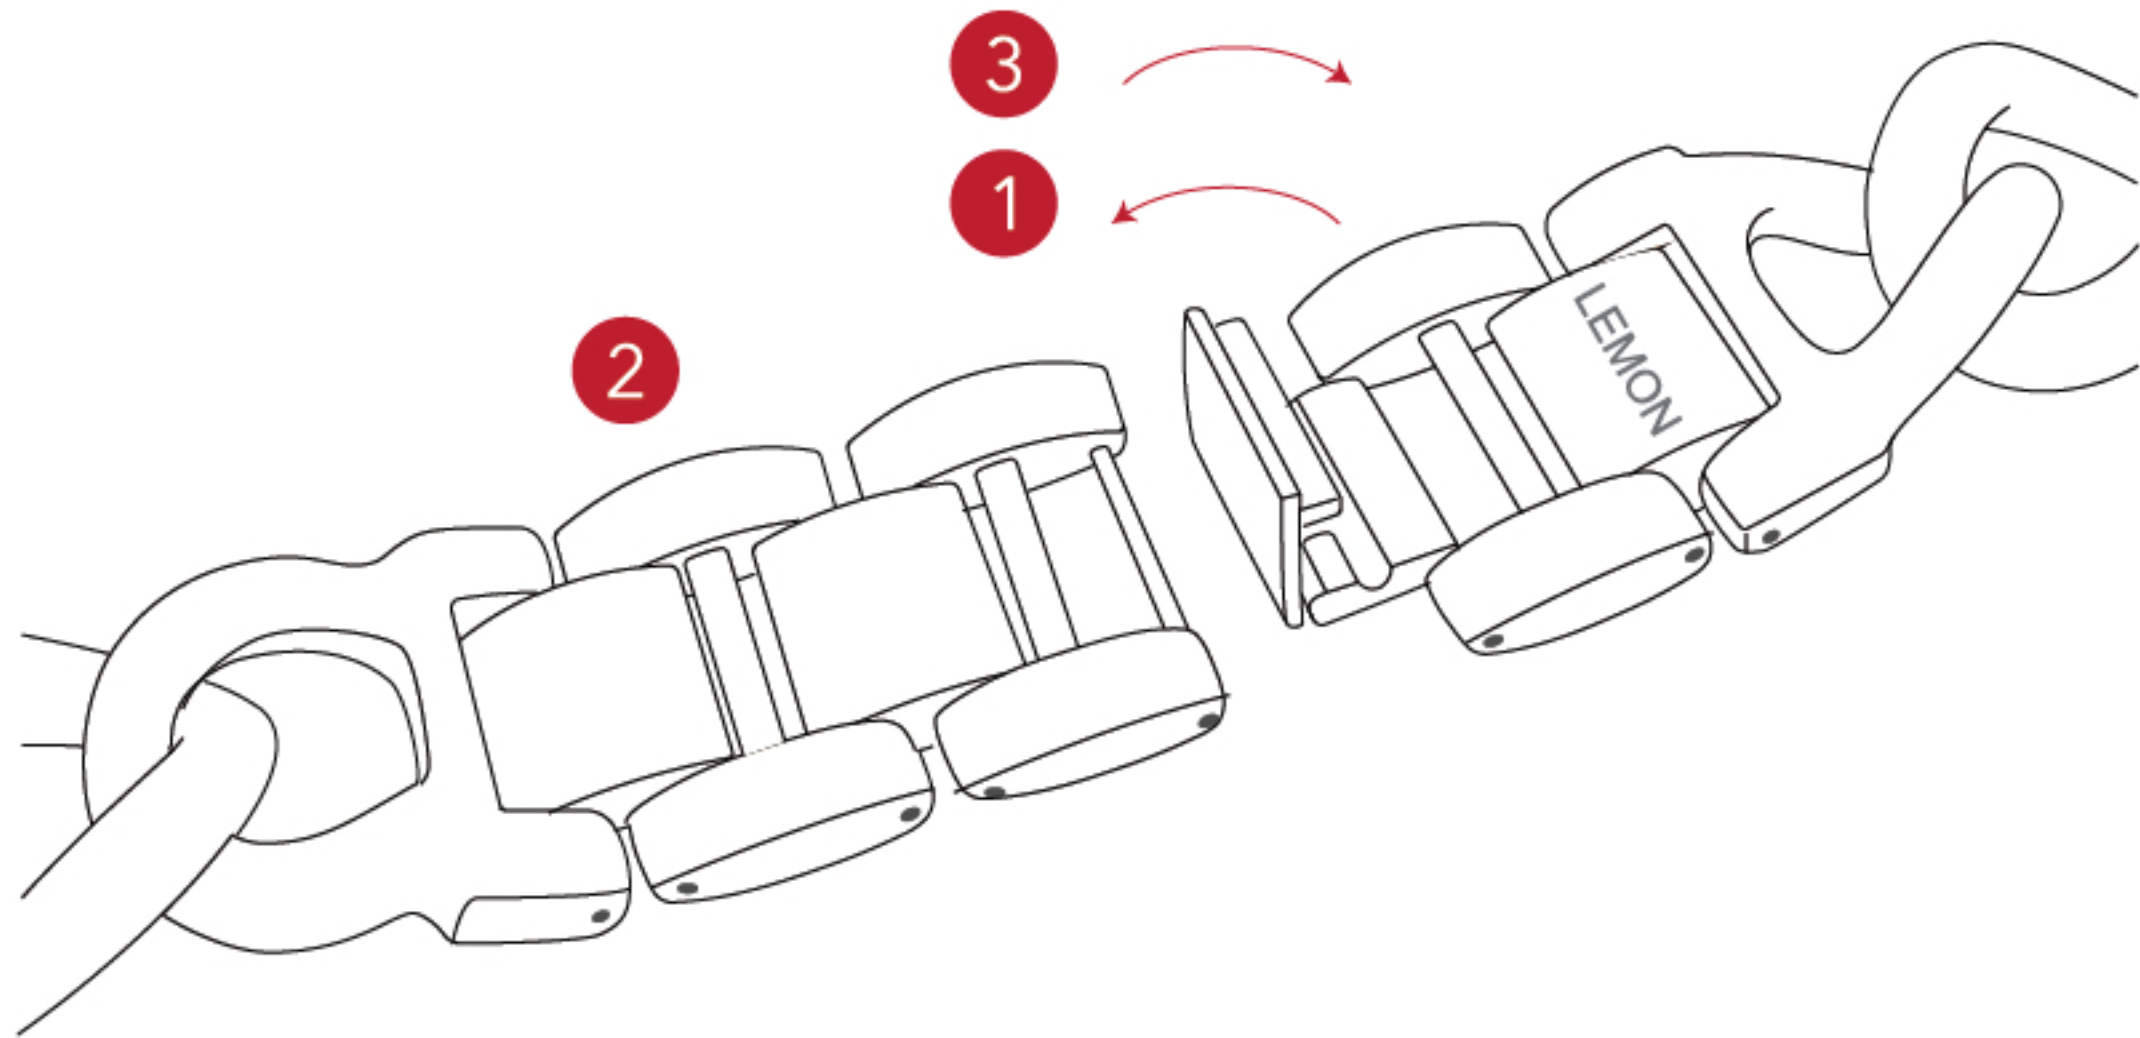

### 01 Unlock

Lift the latch on the top side of the jewellery clasp with your fingers to unsnap it.

### 02 Remove

Continue to unsnap the next clasp to remove the pieces and shorten the watchstrap length. For easier removal, temporarily reconnect the unlocked clasp in step 1, and use a cleaning cloth to help you with it.

### 03 Relink


To relink the watchstrap, connect the clasps, close the latch, and press the latch hook to snap the clasp shut.



Jewellery clasps are designed to be tightly shut to prevent your watch from falling. If any clasp is loose, please stop using the bracelet, and replace the loose clasp before wearing. Our product guarantee and warranty offer free clasp replacement.

Apple Watch

## Changing Your Watchstrap

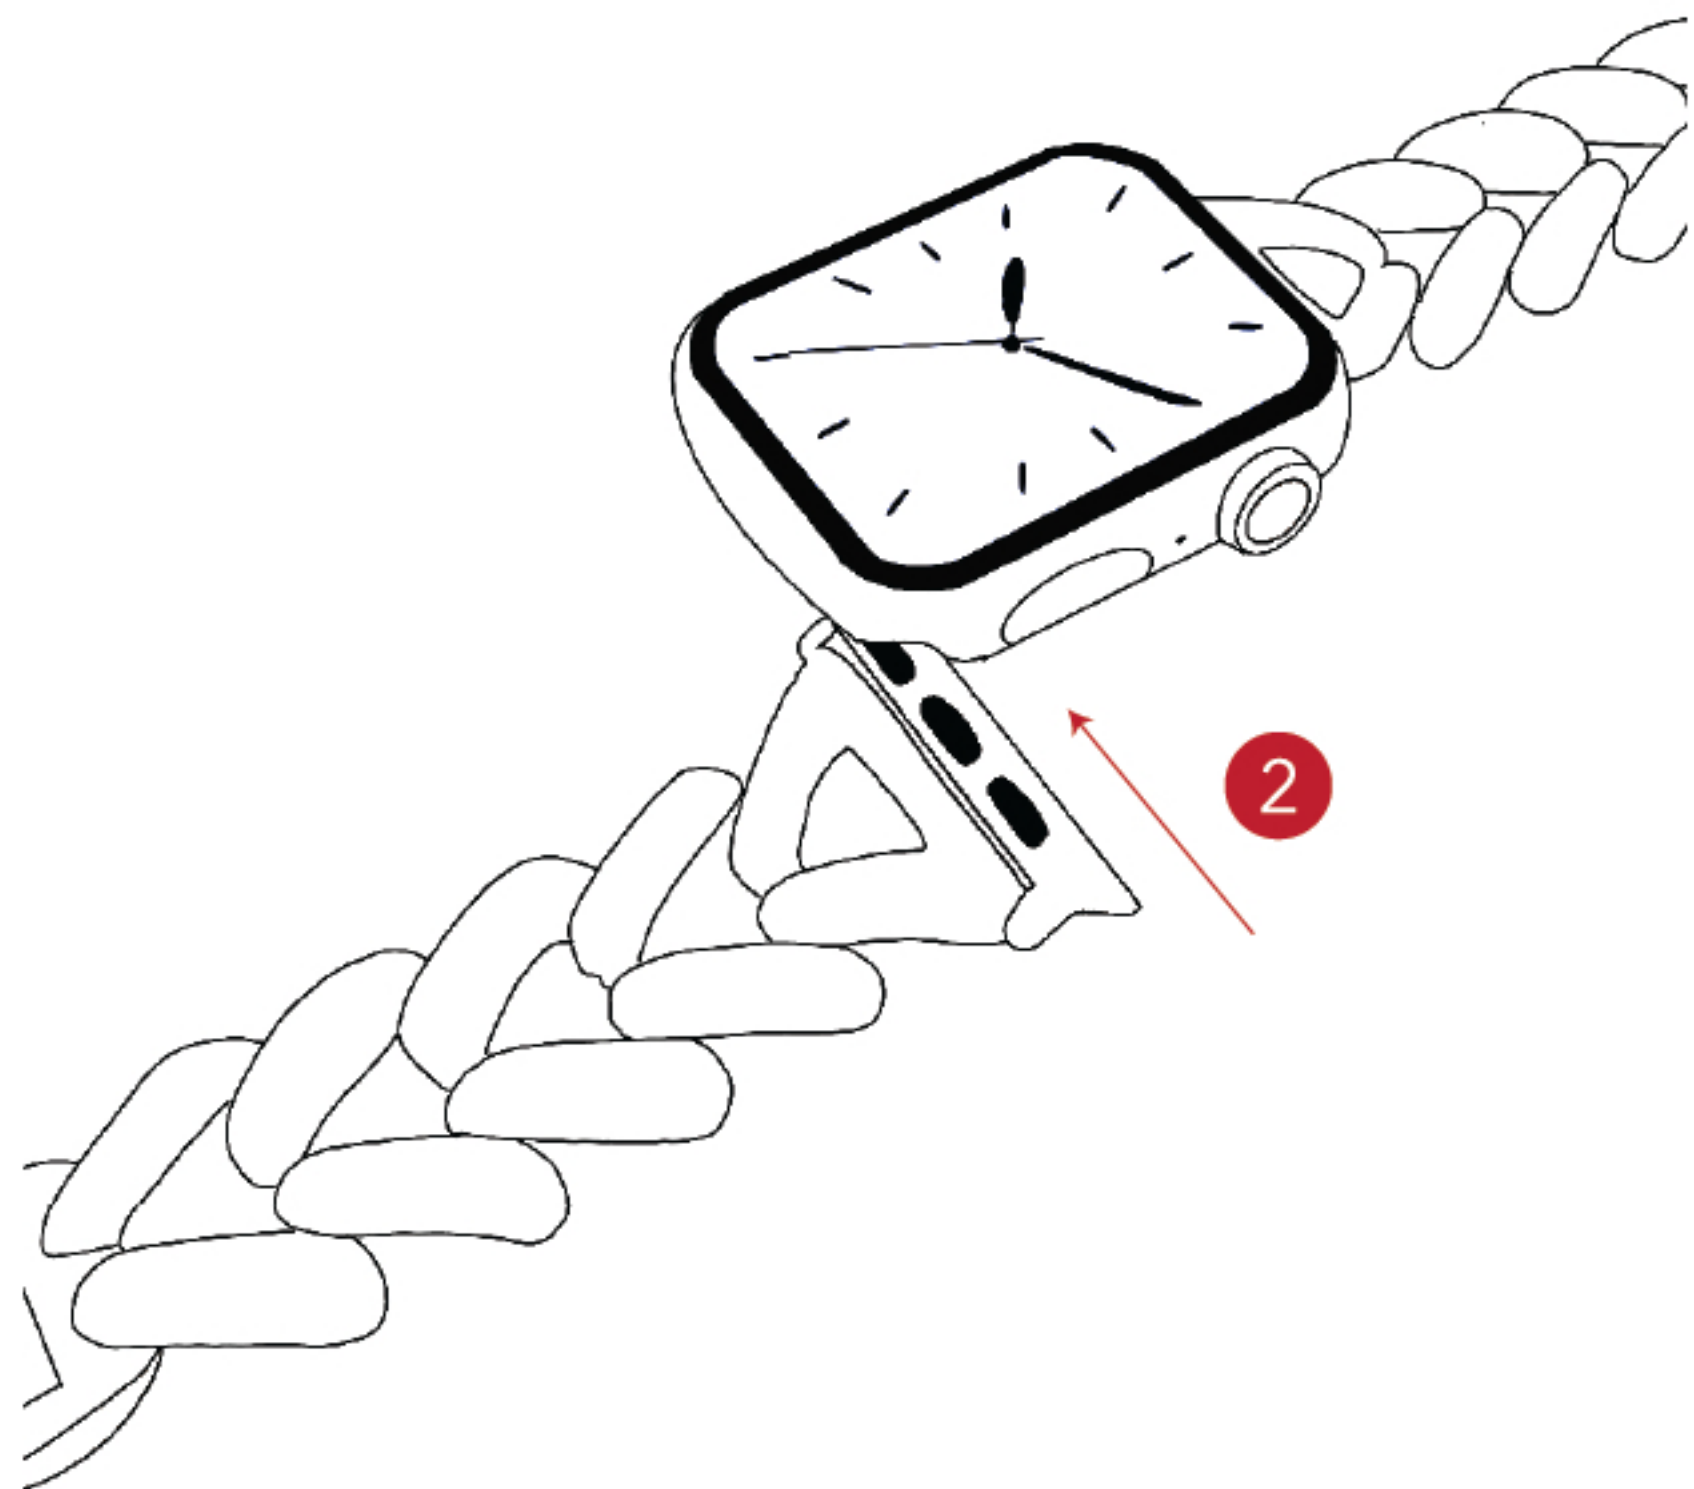

### 01 Release

Turn your Apple Watch upside down. Hold down the band release button, and slide the original watchstrap out of your watch.

### 02 Slide

Make sure that both the watchstrap and your watch are facing up. Slide the new watchstrap into the slot.

LEMON  
時計ストラップ



4893291655  
jewelleryclasp